



Stennis Space Center

Atmospheric Correction Prototype Algorithm for High Spatial Resolution Multispectral Earth Observing Imaging Systems

Mary Pagnutti

Science Systems and Applications, Inc.
John C. Stennis Space Center, MS 39529
phone: 228-688-2135
e-mail: mary.pagnutti@ssc.nasa.gov

High Spatial Resolution Commercial Imagery Workshop
Reston, Virginia, USA
November 10, 2004



Contributors

Stennis Space Center

NASA Applied Sciences Directorate, SSC

Tom Stanley

Vicki Zanoni

Science Systems and Applications, Inc.

Slawomir Blonski

Kara Holekamp

Kelly Knowlton

Don Prados

Jeff Russell

Robert Ryan

Lockheed Martin Space Operations

David Carver

Jerry Gasser

Randy Greer

Wes Tabor

This work was directed by the NASA Applied Sciences Directorate (formerly the Earth Science Applications Directorate) at the John C. Stennis Space Center, Mississippi. Participation in this work by Lockheed Martin Space Operations – Stennis Programs was supported under contract number NAS 13-650. Participation in this work by Computer Sciences Corporation and by Science Systems and Applications, Inc., was supported under NASA Task Order NNS04AB54T.

Overview



Stennis Space Center


- Objective
 - Evaluate accuracy of a prototype algorithm that uses satellite-derived atmospheric products to generate scene reflectance maps for high spatial resolution (HSR) systems
- Approach
 - Implement algorithm in an end-to-end process
 - Compare algorithm generated scene reflectance maps with ground-truth data
 - Identify algorithm sensitivities
 - Provide recommendations
- Constraints
 - Ground truth available only in VNIR spectral range



Atmospheric Correction

Stennis Space Center

- Atmospheric correction is the process of converting satellite signals (at-sensor radiance) to ground reflectances
 - Removes atmospheric and solar illumination effects
- Benefits
 - Improves change detection
 - Used with spectral library based classifiers
 - Simplifies satellite data intercomparisons
- Different levels of atmospheric correction yield different approximations of scene reflectance
 - Planetary reflectance – no knowledge of atmosphere
 - Ground reflectance using knowledge of atmosphere
 - Ground reflectance using knowledge of atmosphere and adjacency effects



Planetary Reflectance

Stennis Space Center

First-order approximation – no knowledge of atmosphere

$$L_{TOA} = \frac{\rho_p E_{sun} \cos \theta}{\pi d^2}$$

Where :

ρ_p = Planetary reflectance


L_{TOA} = Top of atmosphere (at - sensor) radiance

θ = Solar zenith angle

E_{sun} = Solar exoatmospheric irradiance

d = Sun - Earth distance

Atmospheric Correction Algorithm Implementations



Stennis Space Center

- Use knowledge of atmosphere to determine the constants necessary to convert satellite signals to scene reflectances
 - Ground-based reflectance measurements (direct method)
 - Pseudo-invariant targets
 - Ground-based atmosphere (aerosol) measurements
 - Scene-based aerosol estimates (based on dark pixels)
 - Climatological atmosphere
 - *Satellite-based atmospheric measurements*

This presentation will focus on preliminary results of only the satellite-based atmospheric correction algorithm. All algorithms will be evaluated in the coming year.


Atmospheric Correction Prototype Algorithm




Stennis Space Center

- Leverage JACIE commercial imagery radiometric characterizations
 - IKONOS, QuickBird, OrbView-3 (future)
- Use daily coverage from MODIS to provide input data for atmospheric correction
 - MOD04 Aerosol Optical Thickness
 - MOD05 Total Precipitable Water (Water Vapor)
- Generate MODIS-like products
 - Surface Reflectance (MOD09)
 - Gridded Vegetation Indices – NDVI (MOD13)

*Optical
Depth*

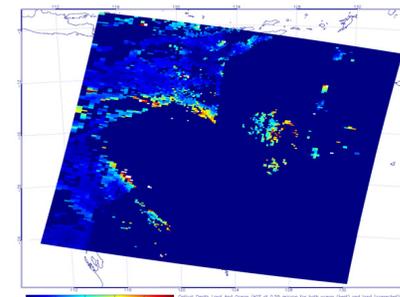


*Water Vapor,
Near Infrared*

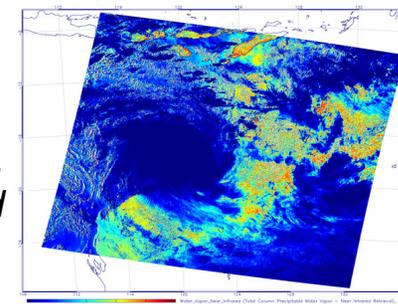

Atmospheric Correction Approach



Stennis Space Center

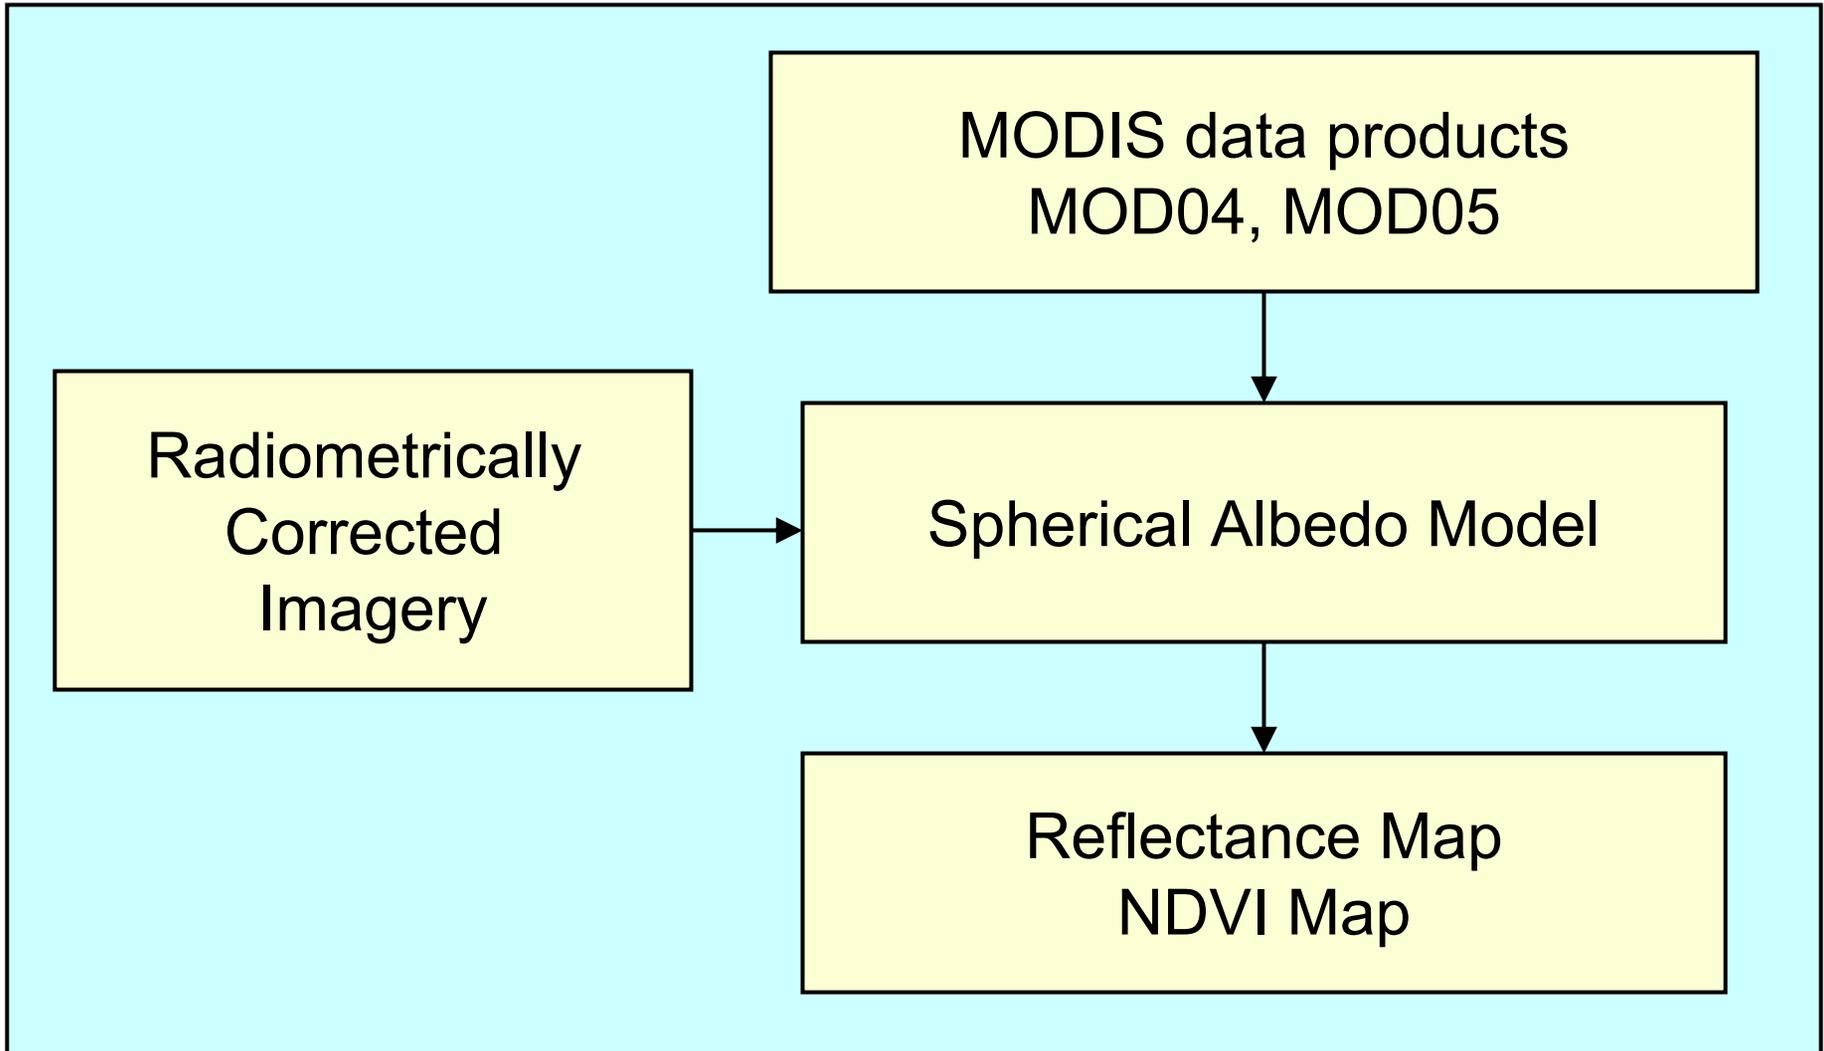

MODIS

(Moderate Resolution Imaging Spectroradiometer)

Stennis Space Center



MODIS provides long-term observations from which an enhanced knowledge of global dynamics and processes occurring on the surface of the Earth and in the lower atmosphere can be derived.

MISSIONS:

- Terra – Dec 1999
- Aqua – May 2002

HERITAGE:

- AVHRR
- High Resolution Infrared Radiation Sounder (HIRS)
- Landsat TM
- Coastal Zone Color Scanner

LINKS:

- Sensor Site:
<http://modis.gsfc.nasa.gov/>
- Data Sites:
<http://daac.gsfc.nasa.gov/> (ocean and atmospheric)
<http://edcdaac.usgs.gov/main.html> (land)

PRODUCT SUMMARY:

- Congruent observations of high-priority atmospheric, oceanic, and land-surface features


VITAL FACTS:

- Instrument: Whiskbroom imaging radiometer
- Bands: 36 from 0.4 and 14.5 μm
- Spatial Resolution: 250 m (2), 500 m (5), 1000 m (29)
- Swath: 2,300 km ($\pm 55^\circ$) from 705 km
- Repeat Time: Global coverage in 1 to 2 days
- Design Life: 6 years

OWNER:

- U.S., NASA






Spherical Albedo Formulation

Stennis Space Center

The spherical albedo approach approximates the signal observed by the satellite as the summation of the components illustrated below

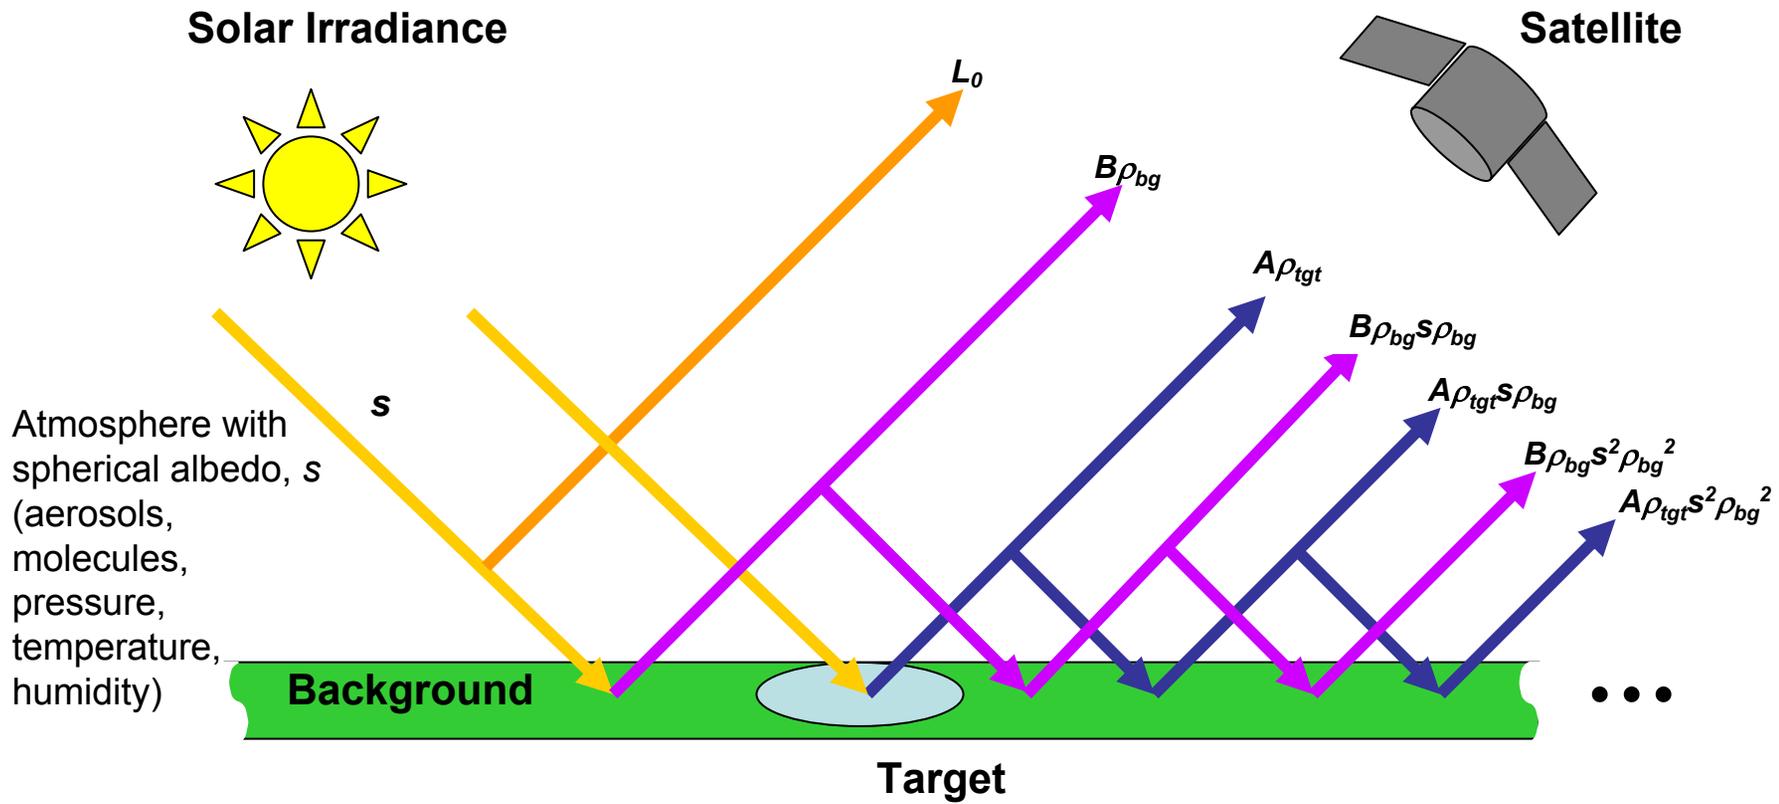

$$L_{TOA} = L_o + A\rho_{tgt} + A\rho_{tgt}s\rho_{bg} + A\rho_{tgt}s^2\rho_{bg}^2 + \dots + B\rho_{bg} + B\rho_{bg}s\rho_{bg} + B\rho_{bg}s^2\rho_{bg}^2 + \dots$$



Atmospheric Correction Approximations

Stennis Space Center

Spherical Albedo formulation simplifies to:

$$L_{TOA} = L_0 + \frac{A\rho_{tgt}}{1 - s\rho_{bg}} + \frac{B\rho_{bg}}{1 - s\rho_{bg}}$$

Knowledge of atmosphere and adjacency

$$L_{TOA} = L_0 + \frac{(A + B)\rho_{tgt}}{1 - s\rho_{tgt}}$$

Knowledge of atmosphere

Where :

ρ_{tgt} = Target reflectance

ρ_{bg} = Background reflectance

L_{TOA} = Top of atmosphere (at - sensor) radiance

A , B , s , and L_0 are constants that depend on atmospheric properties and geometry



Adjacency Effects

Stennis Space Center


- Adjacency effects are caused by complicated multiple scattering in the atmosphere-land surface interactions
 - Dark pixels appear brighter and bright pixels appear darker
 - Significant in turbid atmospheres over highly heterogeneous landscapes
- Different methods have been employed for removing this effect
 - Atmospheric point spread function-PSF (Environmental Function)
 - *Empirical formula*



Spherical Albedo Benefits

Stennis Space Center


- Commonly used and found throughout the literature
- Allows for analytical determination of target albedo/reflectance values
- Computationally efficient



Atmospherically Corrected Imagery

Stennis Space Center

Stennis Space Center
January 15, 2002

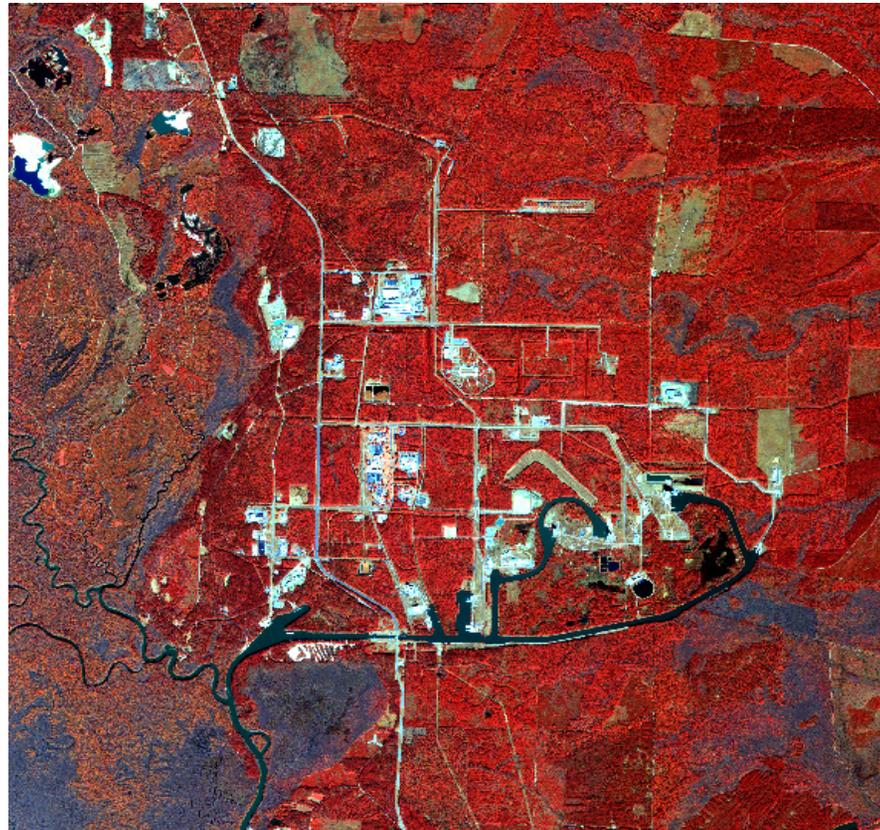



Includes material © Space Imaging, LLC

IKONOS CIR image
(rgb=431)

Atmospherically Corrected NDVI from IKONOS Imagery




Stennis Space Center

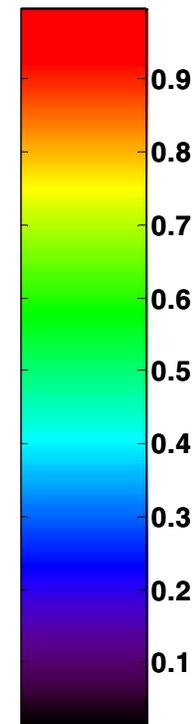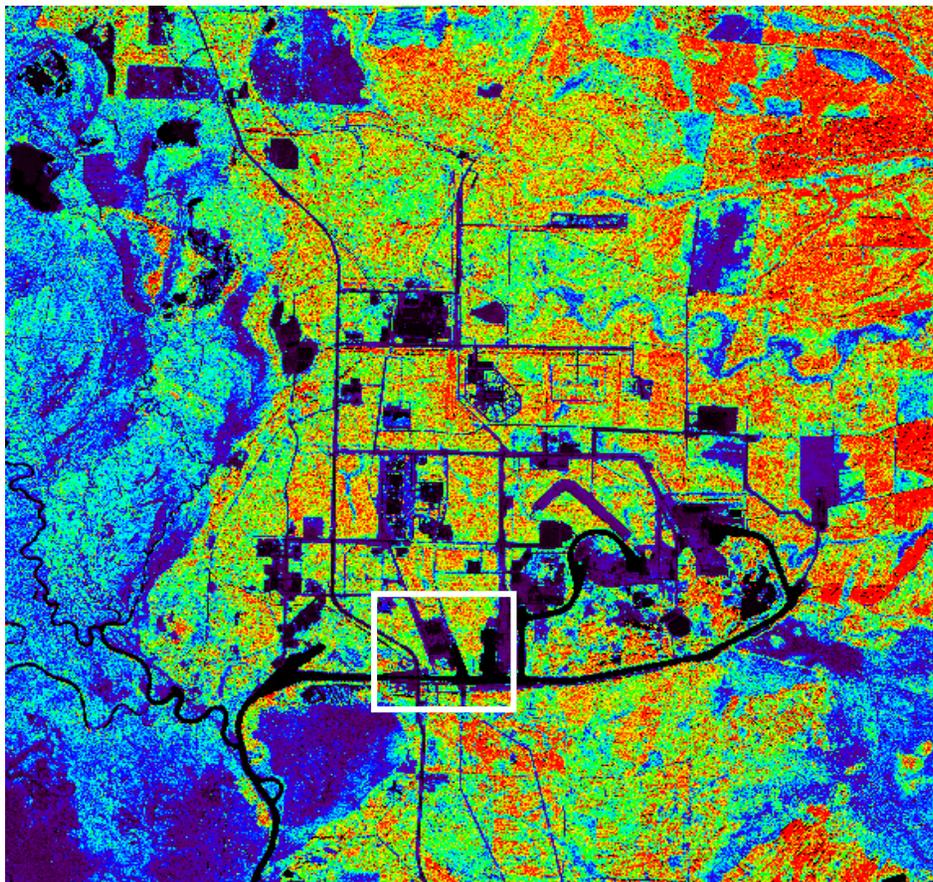


Includes material © Space Imaging, LLC

Stennis Space Center
January 15, 2002




NDVI from IKONOS Imagery

Stennis Space Center

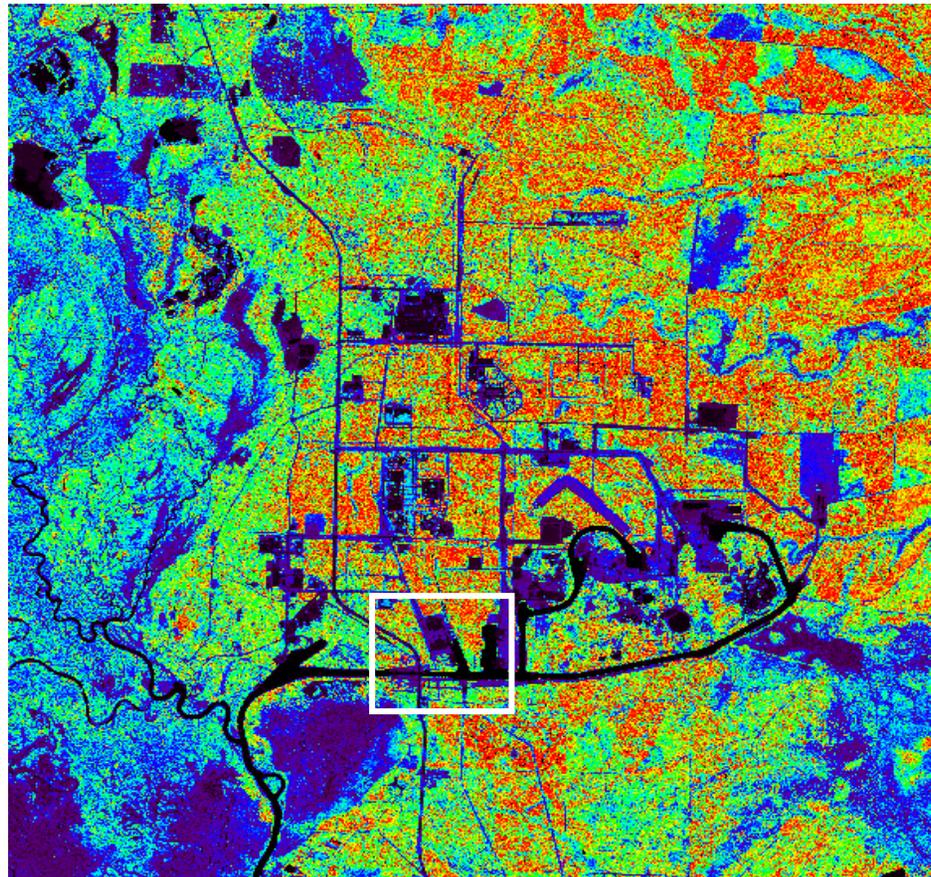


Includes material © Space Imaging, LLC

Stennis Space Center
January 15, 2002



NDVI Histogram Comparison

Stennis Space Center

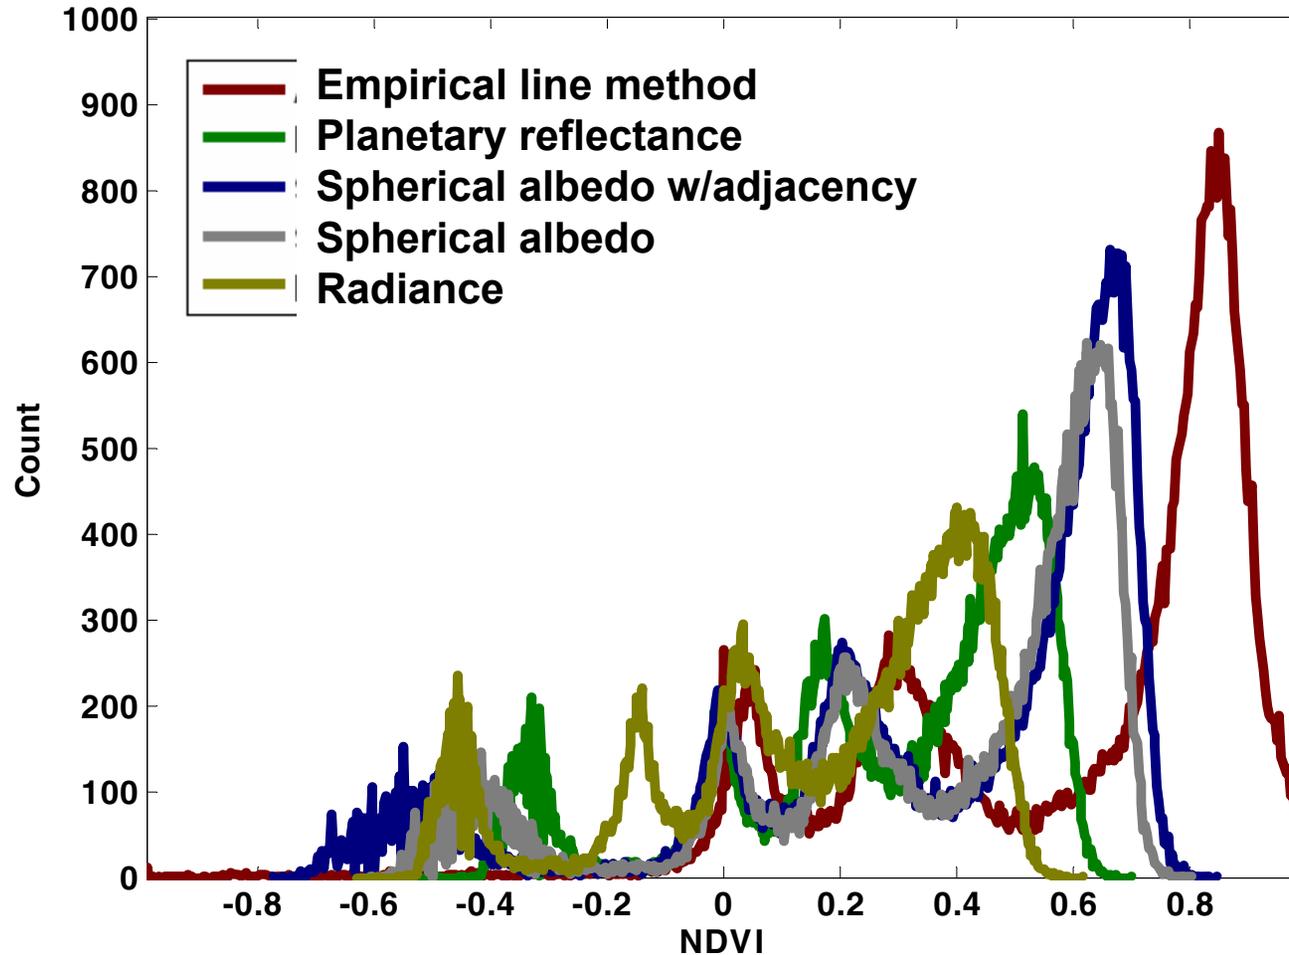

Tarp Site: Stennis Space Center
January 15, 2002



Stennis Space Center


Atmospheric Correction Prototype Algorithm Verification

Scene Selection for Atmospheric Correction Algorithm Verification

Stennis Space Center

- Criteria


- Available ground-truth reflectance and atmospheric measurements
- Available radiometric calibration coefficients
- MODIS overpass close in time to IKONOS/QuickBird overpass

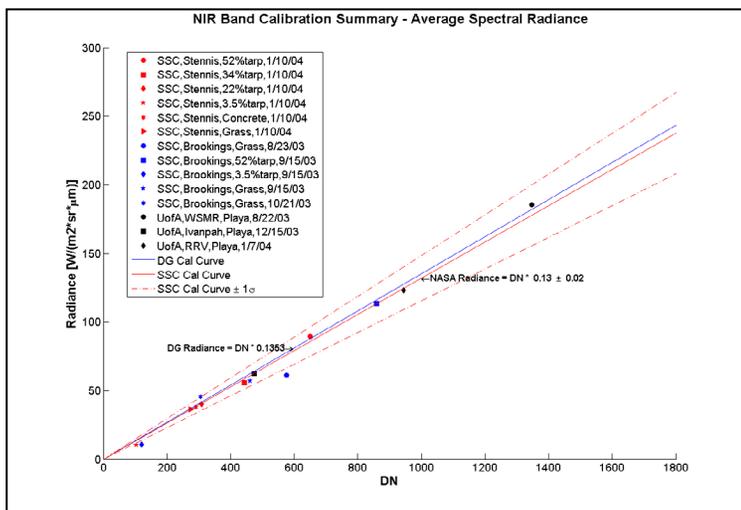



Selected Scene Matrix

Location	Date	HSR Sensor	Sensor Az/EI	Ground Truth
SSC, MS	Jan. 15, 2002	IKONOS	113.0 / 77.2 deg	Targets = 3 tarps (3.5, 22, 52), grass, concrete ASD FieldSpec FR Spectroradiometer, ASR/MFRSR, pressure, radiosonde, BRDF
SSC, MS	Feb. 17, 2002	IKONOS	100.7 / 81.9 deg	Targets = 3 tarps (3.5, 22, 52), grass, concrete ASD FieldSpec FR Spectroradiometer, ASR/MFRSR, radiosonde, BRDF
SSC, MS	Feb. 17, 2002	QuickBird	10.5 / 67.3 deg	Targets = 3 tarps (3.5, 22, 52), grass, concrete ASD FieldSpec FR Spectroradiometer, ASR/MFRSR, radiosonde, BRDF
Brookings, SD	July 20, 2002	QuickBird	349.8 / 64.1 deg	Targets = 2 tarps (3.5, 52), grass ASD FieldSpec FR Spectroradiometer, ASR/MFRSR, radiosonde
Brookings, SD	Sept. 7, 2002	QuickBird	191.0 / 74.9 deg	Targets = 2 tarps (3.5, 52), grass ASD FieldSpec FR Spectroradiometer, ASR/MFRSR
SSC, MS	Nov. 14, 2002	QuickBird	274.8 / 79.4 deg	Targets = 3 tarps (3.5, 22, 52), grass, concrete ASD FieldSpec FR Spectroradiometer, ASR/MFRSR, pressure, radiosonde, BRDF
Brookings, SD	Aug. 23, 2003	QuickBird	148.3 / 76.8 deg	Targets = grass ASD FieldSpec FR Spectroradiometer, ASR/MFRSR
Brookings, SD	Oct. 21, 2003	QuickBird	279.5 / 81.3 deg	Targets = grass ASD FieldSpec FR Spectroradiometer, ASR/MFRSR
SSC, MS	Jan. 10, 2004	QuickBird	230.7 / 89.2 deg	Targets = 4 tarps (3.5, 22, 34, 52), grass, concrete ASD FieldSpec FR Spectroradiometer, ASR/MFRSR, pressure, radiosonde



Satellite Overpass Times

Stennis Space Center

Location	Date	HSR Sensor	HSR Satellite Overpass Time	MODIS Overpass Time
SSC, MS	Jan. 15, 2002	IKONOS	16:44	17:10
SSC, MS	Feb. 17, 2002	IKONOS	16:47	16:14
SSC, MS	Feb. 17, 2002	QuickBird	16:45	16:14
Brookings, SD	July 20, 2002	QuickBird	17:26	17:42
Brookings, SD	Sept. 7, 2002	QuickBird	17:22	16:47
SSC, MS	Nov. 14, 2002	QuickBird	16:44	16:25
Brookings, SD	Aug. 23, 2003	QuickBird	17:07	16:57
Brookings, SD	Oct. 21, 2003	QuickBird	17:11	18:17
SSC, MS	Jan. 10, 2004	QuickBird	16:30	17:27

Algorithm Validation using NASA/JACIE Generated Ground Truthing Datasets

Stennis Space Center

- Laboratory Measurements
 - ASD FieldSpec FR Spectroradiometer calibrations
 - BRDF laboratory measurements
- Field Measurements
 - Radiometric calibration tarps, grass, and concrete targets
 - In-field calibrated sun photometers
 - In-field setup to check atmospheric model parameters

Calibration and Characterization of ASD FieldSpec Spectroradiometers

Stennis Space Center



- NASA SSC maintains four ASD FieldSpec FR spectroradiometers
 - Laboratory transfer radiometers
 - Ground surface reflectance for V&V field collection activities
- Radiometric Calibration
 - NIST-calibrated integrating sphere serves as source with known spectral radiance
- Spectral Calibration
 - Laser and pen lamp illumination of integrating sphere
- Environmental Testing
 - Temperature stability tests performed in environmental chamber







Laboratory BRDF Measurements

Stennis Space Center

- Purpose
 - Laboratory BRDF measurements are used to correct ground-based reflectance measurements for satellite viewing and for solar illumination geometry
- Method
 - Collimated FEL lamp source
 - NIST-calibrated Spectralon® panel serves as reference
 - Goniometer-mounted sample controls illumination geometry
 - Optronics OL750 hyperspectral instrument measures spectra

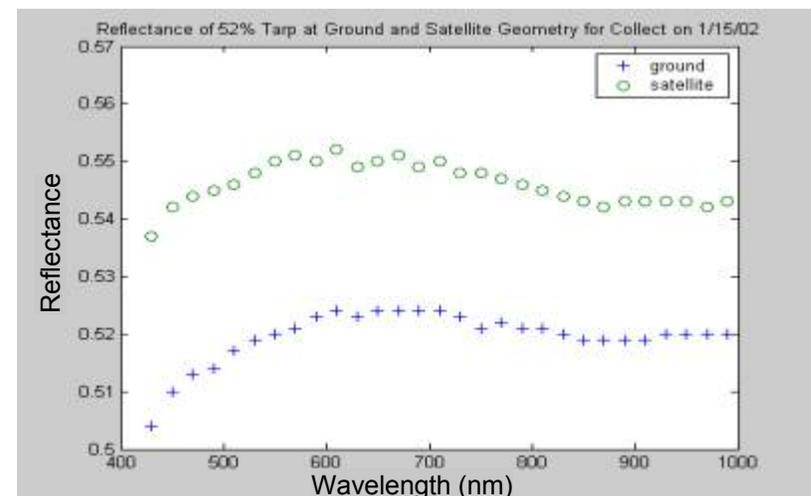



Algorithm Verification Case Matrix

Stennis Space Center

- Three different atmospheric correction approximations
 - Case (1) Planetary reflectance
 - Case (2) Spherical albedo w/knowledge of atmosphere
 - Case (3) Spherical albedo w/knowledge of atmosphere & adjacency
- Three different sets of data used as input into approximation
 - Case (a) ground based-sun photometer (aerosol), TOMS (ozone), Radiosonde (water vapor)
 - Case (b) MOD04 (aerosol), TOMS (ozone), Radiosonde (water vapor)
 - Case (c) MOD04 (aerosol), MOD05 (water vapor), TOMS (ozone) *Operational Case*


- Nine different scenes

9 cases (1) + 17 cases (2b/2c) + 20 cases (3a/3b/3c) = 46 cases

Planetary

Spherical Albedo


*Spherical Albedo
w/adjacency*




MODIS/Sun Photometer Comparison

Stennis Space Center

Total Optical Depth
Stennis Space Center
January 10, 2004

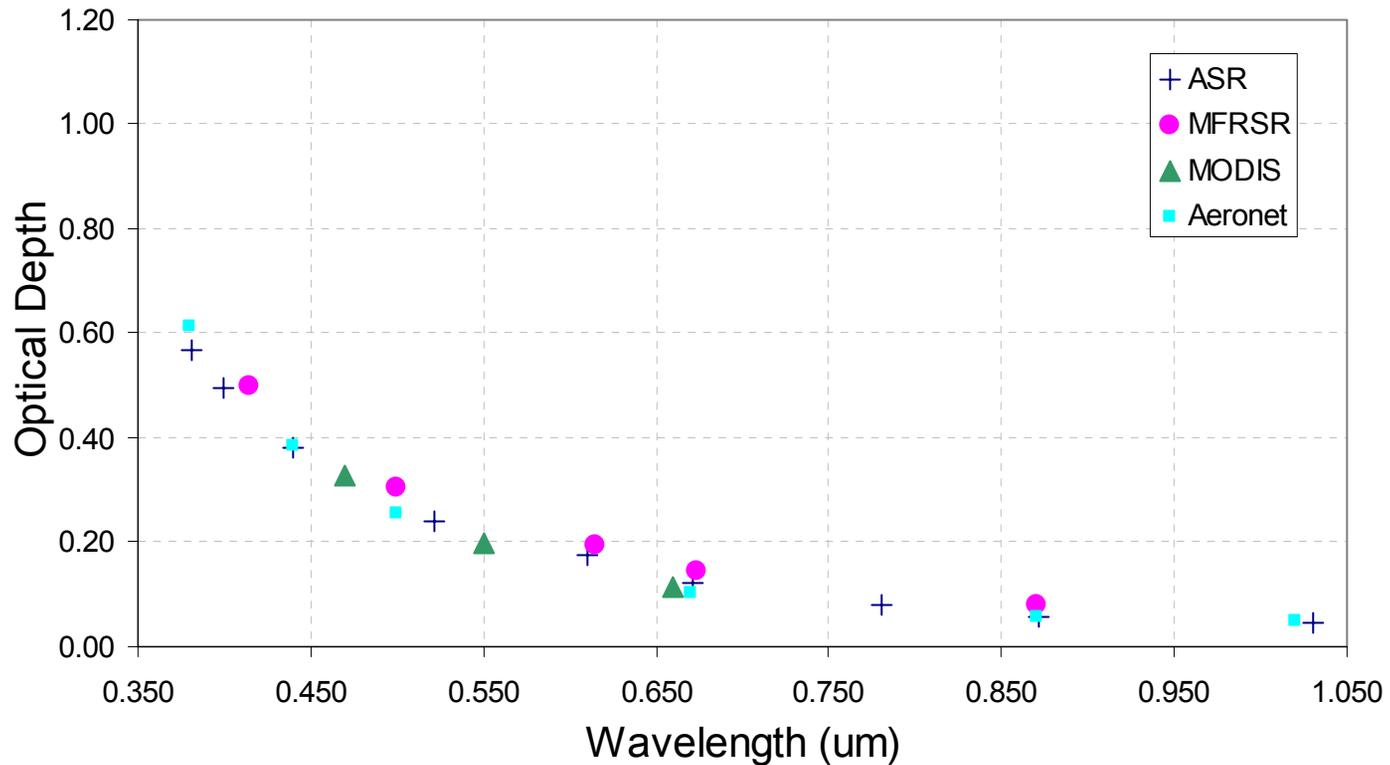




Reflectance Map Over SSC Tarps

Stennis Space Center

January 10, 2004 – Case 3c (Operational input of *best approximation*)

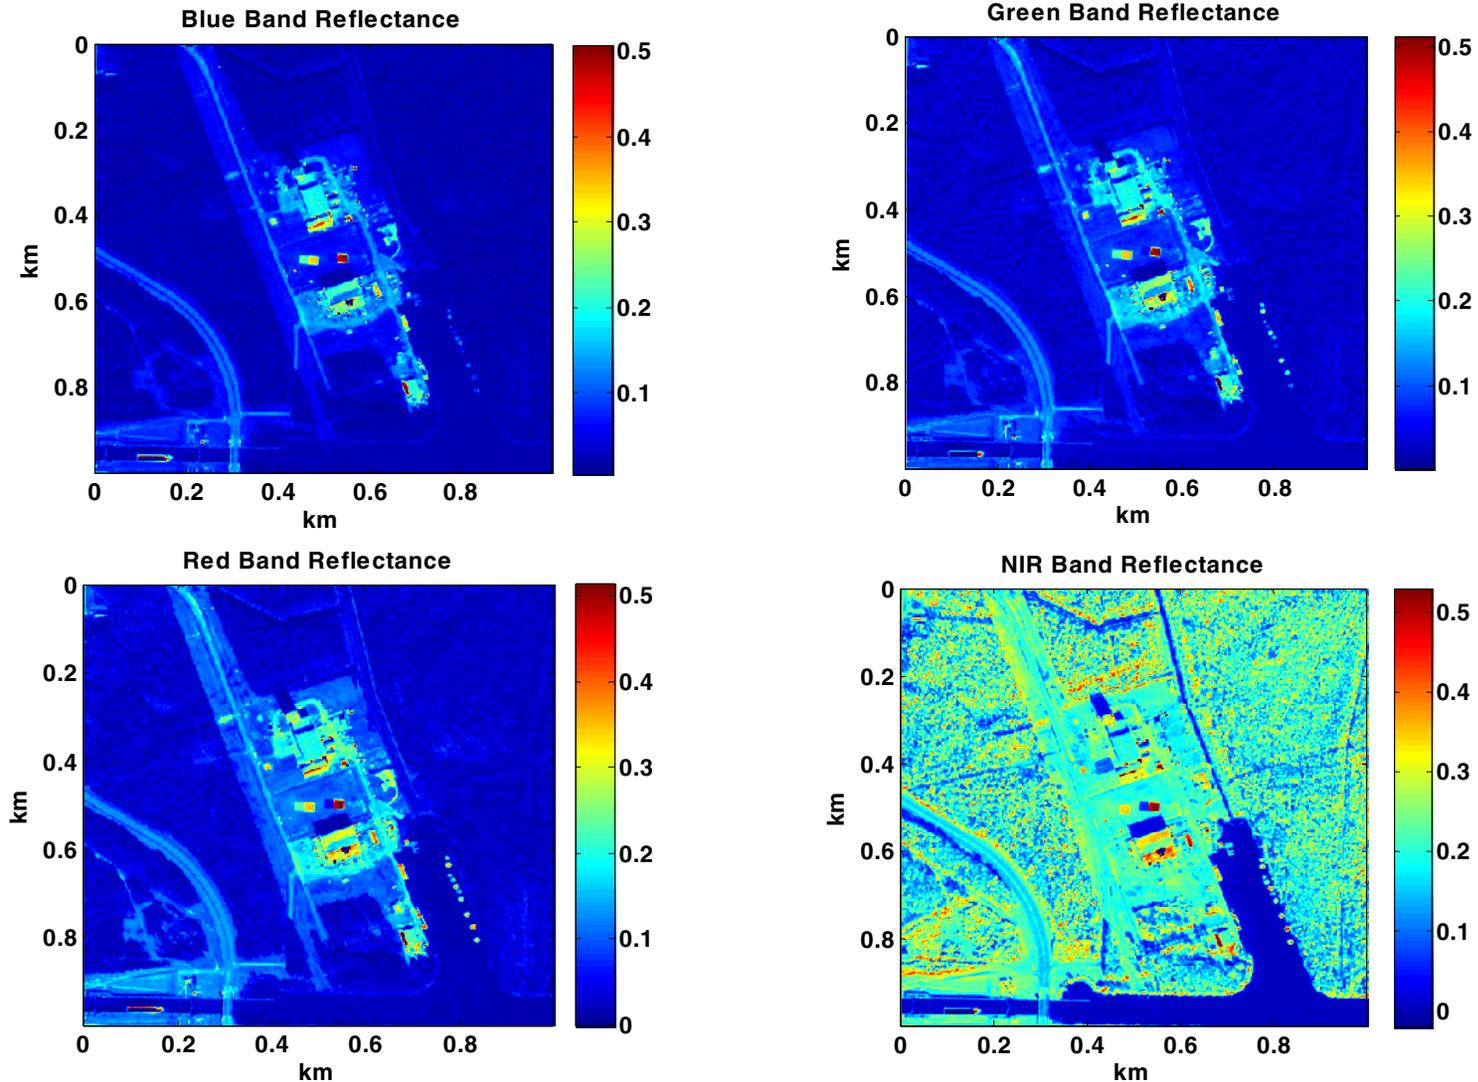

Measured and Calculated Reflectance Values of 52% Tarp



Stennis Space Center

Algorithm
Approximation Effects

Stennis Space Center
January 10, 2004

CASE <i>reflectance</i> (Case reflectance – meas reflectance)	BLUE	GREEN	RED	NIR	RMS
Measured Reflectance (Truth)	0.52	0.52	0.53	0.53	--
Case 1 (Planetary reflectance)	0.46 (-0.06)	0.46 (-0.06)	0.48 (-0.05)	0.50 (-0.03)	0.05
Case 2c (Operational – no adjacency)	0.41 (-0.11)	0.44 (-0.08)	0.47 (-0.06)	0.50 (-0.03)	0.07
Case 3c (Operational – w/adjacency)	0.50 (-0.02)	0.50 (-0.02)	0.51 (-0.02)	0.52 (-0.01)	0.02

Important to take into account the adjacency effect

Measured and Calculated Reflectance Values of Grass Target



Stennis Space Center

Algorithm
Approximation Effects

Stennis Space Center
January 10, 2004

CASE <i>reflectance</i> (<i>Case reflectance – meas reflectance</i>)	BLUE	GREEN	RED	NIR	RMS
Measured Reflectance (Truth)	0.05	0.07	0.10	0.18	--
Case 1 (Planetary reflectance)	0.15 (0.10)	0.13 (0.06)	0.13 (0.03)	0.20 (0.02)	0.06
Case 2c (Operational – no adjacency)	0.06 (0.01)	0.08 (0.01)	0.11 (0.01)	0.20 (0.02)	0.01
Case 3c (Operational – w/adjacency)	0.06 (0.01)	0.08 (0.01)	0.11 (0.01)	0.20 (0.02)	0.01

No adjacency effect

Measured and Calculated Reflectance Values of 52% Tarp



Stennis Space Center

MODIS Input
Parameter Effects

Stennis Space Center
January 10, 2004

CASE <i>reflectance</i> (<i>Case reflectance – meas reflectance</i>)	BLUE	GREEN	RED	NIR	RMS
Measured Reflectance (Truth)	0.52	0.52	0.53	0.53	--
Case 3a (Meas. aerosol and water)	0.52 (0.00)	0.52 (0.00)	0.53 (0.00)	0.53 (0.00)	0.00
Case 3b (MOD04 & meas. water)	0.50 (-0.02)	0.50 (-0.02)	0.51 (-0.02)	0.52 (-0.01)	0.02
Case 3c (MOD04 & MOD05)	0.50 (-0.02)	0.50 (-0.02)	0.51 (-0.02)	0.52 (-0.01)	0.02

Measured and Calculated Reflectance Values using Operational Inputs

Stennis Space Center

MOD04 – aerosol
MOD05 – water vapor

Stennis Space Center
January 10, 2004

CASE 3c <i>reflectance</i> <i>(Case reflectance – meas reflectance)</i>	BLUE	GREEN	RED	NIR	RMS
3.5% Tarp (0.04, 0.04, 0.03, 0.03)	0.05 (0.01)	0.06 (0.02)	0.05 (0.02)	0.06 (0.03)	0.02
22% Tarp (0.22, 0.22, 0.21, 0.20)	0.24 (0.02)	0.24 (0.02)	0.23 (0.02)	0.23 (0.03)	0.02
34% Tarp (0.31, 0.31, 0.31, 0.30)	0.34 (0.03)	0.34 (0.03)	0.34 (0.03)	0.34 (0.04)	0.03
52% Tarp (0.52, 0.52, 0.53, 0.53)	0.50 (-0.02)	0.50 (-0.02)	0.51 (-0.02)	0.52 (-0.01)	0.02
Grass (0.05, 0.07, 0.10, 0.18)	0.06 (0.01)	0.08 (0.01)	0.11 (0.01)	0.20 (0.02)	0.01
Concrete (0.11, 0.13, 0.16, 0.19)	0.12 (0.01)	0.15 (0.02)	0.17 (0.01)	0.21 (0.02)	0.01

Operational Algorithm Verification Summary (Case 3c)



Stennis Space Center

Location	Date	Sensor	Average RMS for all targets
SSC, MS	Jan. 15, 2002	IKONOS	0.02
SSC, MS	Feb. 17, 2002	IKONOS	0.04
SSC, MS	Feb. 17, 2002	QuickBird	0.01
Brookings, SD	July 20, 2002	QuickBird	0.01
Brookings, SD	Sept. 7, 2002	QuickBird	0.02
Brookings, SD	Aug. 23, 2003	QuickBird	0.00
Brookings, SD	Oct. 21, 2003	QuickBird	0.02
SSC, MS	Jan. 10, 2004	QuickBird	0.02



Summary/Future Direction

Stennis Space Center

- MODIS products (MOD04, MOD05) provide the necessary inputs to generate high-spatial-resolution reflectance products under many conditions
 - Average RMS differences range between 0.00–0.04 for the eight datasets evaluated (Case 3c-Operational input to best approximation)
- Adjacency can be an important component that needs to be accounted for to minimize errors
- Future Activities/Recommendations
 - Evaluate alternate algorithms
 - Compare algorithm results to MODIS products (MOD09, MOD13)
 - Compare algorithm results to commercial atmospheric correction algorithm results (FLAASH, ACORN, ATCOR ...)