

<b>SOLICITATION, OFFER AND AWARD</b>		1. THIS CONTRACT IS A RATED ORDER UNDER DPAS (15 CFR 700)		RATING	PAGE 1 OF 79 PAGES
2. CONTRACT NUMBER	3. SOLICITATION NUMBER USDA-NAIP-3-04	4. TYPE OF SOLICITATION <input type="checkbox"/> SEALED BID (IFB) <input checked="" type="checkbox"/> NEGOTIATED (RFP)	5. DATE ISSUED 03-31-04	6. REQUISITION/PURCHASE NUMBER	
7. ISSUED BY USDA-FSA-Aerial Photography Field Office 2222 West 2300 South Salt Lake City, UT 84119-2020		8. ADDRESS OFFER TO (If other than Item 7) Contracting Officer, USDA/FSA-APFO 2222 West 2300 South Salt Lake City, UT 84119-2020			

NOTE: In sealed bid solicitations "offer" and "offeror" mean "bid" and "bidder".

**SOLICITATION**

9. Sealed offers in original and No copies for furnishing the supplies or services in the Schedule will be received at the place specified in Item 8, or if handcarried, in the depository located in Rm. 10, Aerial Photography Field Office until 4:30pm local time 04-30-04  
(Hour) (Date)

CAUTION - LATE Submissions, Modifications, and Withdrawals: See Section L, Provision No. 52.214-7 or 52.215-1. All offers are subject to all terms and conditions contained in this solicitation.

10. FOR INFORMATION CALL:	A. NAME W. Geoffrey Gabbott	B. TELEPHONE (NO COLLECT CALLS)		C. E-MAIL ADDRESS geoffrey.gabbott@apfo.usda.gov
		AREA CODE 801	NUMBER 975-3500	EXT. 207

**11. TABLE OF CONTENTS**

(X)	SEC.	DESCRIPTION	PAGE(S)	(X)	SEC.	DESCRIPTION	PAGE(S)
PART I - THE SCHEDULE				PART II - CONTRACT CLAUSES			
<input checked="" type="checkbox"/>	A	SOLICITATION/CONTRACT FORM	1	<input checked="" type="checkbox"/>	I	CONTRACT CLAUSES	38-50
<input checked="" type="checkbox"/>	B	SUPPLIES OR SERVICES AND PRICES/COSTS	2-9	PART III - LIST OF DOCUMENTS, EXHIBITS AND OTHER ATTACH.			
<input checked="" type="checkbox"/>	C	DESCRIPTION/SPECS./WORK STATEMENT	10-20	<input checked="" type="checkbox"/>	J	LIST OF ATTACHMENTS	51-65
<input checked="" type="checkbox"/>	D	PACKAGING AND MARKING	21-22	PART IV - REPRESENTATIONS AND INSTRUCTIONS			
<input checked="" type="checkbox"/>	E	INSPECTION AND ACCEPTANCE	23-25	<input checked="" type="checkbox"/>	K	REPRESENTATIONS, CERTIFICATIONS AND OTHER STATEMENTS OF OFFERORS	66-69
<input checked="" type="checkbox"/>	F	DELIVERIES OR PERFORMANCE	26-32	<input checked="" type="checkbox"/>	L	INSTRS., CONDS., AND NOTICES TO OFFERORS	70-76
<input checked="" type="checkbox"/>	G	CONTRACT ADMINISTRATION DATA	33-35	<input checked="" type="checkbox"/>	M	EVALUATION FACTORS FOR AWARD	77-79
<input checked="" type="checkbox"/>	H	SPECIAL CONTRACT REQUIREMENTS	36-37				

**OFFER (Must be fully completed by offeror)**

NOTE: Item 12 does not apply if the solicitation includes the provisions at 52.214-16, Minimum Bid Acceptance Period.

12. In compliance with the above, the undersigned agrees, if this offer is accepted within \_\_\_\_\_ calendar days (60 calendar days unless a different period is inserted by the offeror) from the date for receipt of offers specified above, to furnish any or all items upon which prices are offered at the price set opposite each item, delivered at the designated point(s), within the time specified in the schedule.

13. DISCOUNT FOR PROMPT PAYMENT (See Section I, Clause No. 52.232-8)	<input checked="" type="checkbox"/> 10 CALENDAR DAYS (%)	<input type="checkbox"/> 20 CALENDAR DAYS (%)	<input type="checkbox"/> 30 CALENDAR DAYS (%)	<input type="checkbox"/> CALENDAR DAYS (%)
14. ACKNOWLEDGMENT OF AMENDMENTS (The offeror acknowledges receipt of amendments to the SOLICITATION for offerors and related documents numbered and dated):	AMENDMENT NO.	DATE	AMENDMENT NO.	DATE

15A. NAME AND ADDRESS OF OFFEROR	CODE	FACILITY	16. NAME AND TITLE OF PERSON AUTHORIZED TO SIGN OFFER (Type or print)	
15B. TELEPHONE NUMBER AREA CODE NUMBER EXT.	15C. CHECK IF REMITTANCE ADDRESS IS DIFFERENT FROM ABOVE - ENTER SUCH ADDRESS IN SCHEDULE. <input type="checkbox"/>		17. SIGNATURE	18. OFFER DATE

**AWARD (To be completed by Government)**

19. ACCEPTED AS TO ITEMS NUMBERED	20. AMOUNT	21. ACCOUNTING AND APPROPRIATION		
22. AUTHORITY FOR USING OTHER THAN FULL AND OPEN COMPETITION: <input type="checkbox"/> 10 U.S.C. 2304(c) ) <input type="checkbox"/> 41 U.S.C. 253(c) ( )		23. SUBMIT INVOICES TO ADDRESS SHOWN IN (4 copies unless otherwise specified)		ITEM
24. ADMINISTERED BY (If other than Item 7) CODE		25. PAYMENT WILL BE MADE BY CODE		
26. NAME OF CONTRACTING OFFICER (Type or print)		27. UNITED STATES OF AMERICA  (Signature of Contracting Officer)		28. AWARD DATE

PART I - THE SCHEDULE

SECTION B - SUPPLIES OR SERVICES AND PRICES/COSTS

B-1 AERIAL PHOTOGRAPHY AND DIGITAL IMAGERY SERVICES

Furnish aerial photography and direct digital imagery services and all related services and supplies in accordance with the requirements, specifications, terms, conditions, clauses, and provisions specified herein. This is an indefinite-delivery, indefinite-quantity (IDIQ) contract, effective for the contract performance periods stated in the schedule. The Government’s proposed project areas, quantities, and other parameters listed in B-1.2, are subject to change through the negotiation process of selecting the “Best Value” source for contract award.

1.1 Pricing Proposal

In the spaces provided, please indicate quantities of digital orthoimagery quarter quadrangles (DOQQ) for imagery acquisition and digital image processing, unit prices and extended total amounts consistent with the state(s) you are offering.

2004 NATIONAL AGRICULTURE IMAGERY PROGRAM (NAIP)				
DESCRIPTION	QTY.	UNIT	UNIT PRICE	TOTAL AMOUNT
2m Orthorectified Imagery (Two meter GeoTiff files)		DOQQ	\$	\$
1m Orthorectified Imagery (One meter GeoTiff files)		DOQQ	\$	\$
<b>PRICING PROPOSAL INSTRUCTIONS:</b>				
<p>In the space provided below, indicate the state(s) proposed in your offer. You must confirm your proposed state(s) by marking the appropriate boxes in Section B-1.2, <u>Project Item Areas, Quantities, and Acquisition Periods</u>, Page 3. <b>PLEASE NOTE: The minimum unit of offer is a project item area, identified by state, including all required imagery within that state (whole or partial coverage).</b></p>				

1.2 Proposed Project Item Areas, Quantities, and Acquisition Periods

The proposed project item area quantities. Please mark the appropriate space provided (CHECK BOX) next to the state(s) you are offering in your proposal and circle the proposed method of acquisition (ACQ METHOD). **PLEASE NOTE:** A brief description of your proposed area is required in Section B-1.1, Page 2. The minimum unit of offer is a project item area listed below, by state, including all required imagery within that state or area.

CHECK BOX	STATE	GROUND SAMPLE DISTANCE	ACQ METHOD	COLOR TYPE	QUARTER QUADS	ACQ PERIOD (2004)
[ ]	Arizona	2-Meter	Film/Digital	CP	737	AUG 1 – AUG 31
[ ]	California	2-Meter	Film/Digital	CP	4,296	JUL 1 - JUL 31
[ ]	Colorado	2-Meter	Film/Digital	CP	3,547	JUN 15 – AUG 3
[ ]	Idaho	1-Meter	Film/Digital	CP	6,522	JUN 1 - AUG 30
[ ]	Illinois	2-Meter	Film/Digital	CP	4,163	JUN 30 – AUG 30
[ ]	Indiana	2-Meter	Film/Digital	CP	1,084	JUL 1 - AUG 15
[ ]	Iowa	2-Meter	Film/Digital	CP	4,181	JUN 20 – SEP 15
[ ]	Kansas	2-Meter	Film/Digital	CP	5,693	JUN 20 – AUG 4
[ ]	Kentucky	1-Meter	Film/Digital	CP	2,948	JUN 15 – AUG 15
[ ]	Louisiana	2-Meter	Film/Digital	CP	1,143	JUN 25 – AUG 30
[ ]	Massachusetts	2-Meter	Film/Digital	CP	737	JUL 1-AUG 30
[ ]	Minnesota (1)*	1-Meter	Film	CP	234	JUN 1 - AUG 31
[ ]	Minnesota (2)*	2-Meter	Film/Digital	CP	5,889	JUN 20 – AUG 31
[ ]	Mississippi	2-Meter	Film/Digital	CP	3,200	JUL 1 - AUG 31
[ ]	Missouri	2-Meter	Film/Digital	CP	5,043	JUN 10 – AUG 15
[ ]	Montana	2-Meter	Film/Digital	CP	6,830	JUN 25 – SEP 1
[ ]	Nebraska	2-Meter	Film/Digital	CP	5,873	JUL 1 - AUG 15
[ ]	New Hampshire	2-Meter	Film/Digital	CP	776	JUL 15 – SEP 1
[ ]	New York	2-Meter	Film/Digital	CP	2,300	JUN 15 – AUG 15
[ ]	North Carolina	2-Meter	Film/Digital	CP	3,586	JUN 1 - AUG 15
[ ]	North Dakota	2-Meter	Film	CP	5,675	JUN 20 – AUG 15
[ ]	Ohio	1-Meter	Film/Digital	CP	3,077	JUN 20 – AUG 15
[ ]	Oklahoma (West)**	2-Meter	Film/Digital	CP	2,651	JUN 1 - JUN 30
[ ]	Oklahoma (East)**	2-Meter	Film/Digital	CP	2,152	JUL 1 - SEP 1
[ ]	Oregon	2-Meter	Film/Digital	CP	5,522	JUN 15 – SEP 1
[ ]	Pennsylvania	1-Meter	Film/Digital	CP	3,413	JUN 1 - AUG 15
[ ]	Rhode Island	2-Meter	Film/Digital	CP	117	JUL 1 - JUL 31
[ ]	South Carolina	2-Meter	Film/Digital	CP	977	JUN 1 - AUG 15
[ ]	South Dakota	1-Meter	Film/Digital	CP	6,045	JUL 5 - SEP 15
[ ]	Tennessee	2-Meter	Film/Digital	CP	931	JUL 15 – AUG 15
[ ]	Texas (South)**	1-Meter	Film/Digital	CIR	1,555	JUN 1 - JUN 30
[ ]	Texas (Central)**	1-Meter	Film/Digital	CIR	3,433	JUL 1 - JUL 31
[ ]	Texas (Northeast)**	1-Meter	Film/Digital	CIR	4,443	AUG 1 – AUG 30
[ ]	Texas (Northwest)**	1-Meter	Film/Digital	CIR	8,133	AUG 15 – SEP 15
[ ]	Utah	1-Meter	Film/Digital	CP	2,649	JUL 10 - SEP 10
[ ]	Vermont	2-Meter	Film/Digital	CP	825	JUL 15 – AUG 31
[ ]	Virginia (1)*	1-Meter	Film	CP	400	JUN 1 - AUG 15
[ ]	Virginia (2)*	2-Meter	Film/Digital	CP	2,114	JUN 1 - AUG 15
[ ]	Washington	2-Meter	Film/Digital	CP	3,252	JUN 15 – SEP 1
[ ]	Wisconsin	2-Meter	Film/Digital	CP	2,259	JUN 20 – AUG 30
[ ]	Wyoming	2-Meter	Film/Digital	CP	1,146	JUL 1 - SEP 1

\* Minnesota and Virginia have two separate project item areas. Each project item area is identified by its ground sample distance (GSD) requirement indicated on the table above. See Attachment C, State Project Maps for graphic representations of the GSD requirements for the individual project item areas.

\*\* Oklahoma and Texas have been divided into multiple project item areas to accommodate different acquisition periods. Each state will be awarded as a whole unit with project items areas designated for acquisition periods.

### 1.3 Optional Award Item

The USDA Farm Service Agency (FSA) is inviting alternative methods of acquiring two (2) meter compliance imagery. The alternative proposals should promote greater efficiencies and economies in acquisition and delivery.

- (a) Optional Award Items may be proposed by listing the areas or state(s) offered and describing the alternative method. A detailed explanation and description of the technical approach of any alternative method is required as part of your proposal. Offers for the Optional Award Item will be evaluated at the time of award (See Section M-3, Evaluation Exclusive of Options).
- (b) All imagery offered under the optional award item shall be acquired with approved precision digital sensors or aerial mapping cameras. Required compressed county mosaics, quarter quadrangles tiles, and associated material shall be furnished as stated in paragraph-3.1(a) of this section.

### 1.4 Priorities for Project Item Areas

The Contracting Officer may direct, by written order, certain project item areas or regions within those areas listed under a Contract Item to be acquired in a priority order, weather and ground conditions permitting. All reasonable effort will be directed toward providing a schedule of operations favorable to both the Government and Contractor.

### 1.5 Price Reduction

Any marginal photography/imagery submitted for inspection which does not meet minimum requirements shall be subject to a price reduction based on the diminished usability of the product. The nature and urgency of the NAIP imagery may require the Government to make equitable financial adjustments for materials deemed rejectable or where product use is adversely impacted.

## B-2 INTENDED USE OF PRODUCTS

There are two primary purposes for the contract products: (1) To provide timely two meter resolution digital orthoimagery to FSA Service Centers for use in their administration of FSA's Farm Compliance Programs; (2) To provide timely one meter resolution digital orthoimagery to

FSA Service Centers and cost sharing partners for use in updating their Geographic Information System (GIS) image base as well as for use in FSA's administration of Farm Compliance Programs. Additional uses of contract products include providing original aerial film and related products for multi-agency program uses.

### B-3 MINIMUM PROJECT REQUIREMENTS

#### 3.1 General Requirements

- (a) The following contract deliverables shall be prepared and submitted by the Contractor:
  - (1) Compressed County Mosaics (CCMs),
  - (2) Quarter Quadrangle Image Tiles (full resolution),
  - (3) Accuracy and Quality Control Reports (1 meter only),
  - (4) Original Aerial Film (aerial photography only),
  - (5) Progress Reports,
  - (6) Project Data Files,
  - (7) Other metadata requirements.
- (b) All contract materials shall be prepared in accordance with specifications and work statement (Section C), packaging and marking (Section D), inspection and acceptance (Section E), and delivery schedule (Section F) requirements.
- (c) A product warranty shall be provided on all deliverables in accordance with Section I-8, Warranty of Supplies of a Noncomplex Nature.

#### 3.2 Aerial Photography Acquisition

The aerial photography acquisition requirements will be for *1:40,000 scale*, quarter quadrangle centered photography with predetermined exposure stations. Flight line maps and flight altitudes will not be furnished, rather, a flight exposure data file (see Section B-4.1) will be provided indicating the locations of all required quarter quadrangle centered exposure stations.

- (a) Film-based acquisitions require the Contractor to comply with the technical requirements and specifications of this contract, and Attachment A: NAIP Specification For Film Based Acquisition which defines the essential elements in securing high quality aerial photography and scanned imagery.
- (b) See Section J, Exhibit 5 for Flight Line Exposure Station Reference System, Exhibit 7 for State Data Table, and Attachment C for State Coverage Maps.

### 3.3 Direct Digital Sensor Acquisition

The direct digital imagery acquisition requirements will be for the collection of visible (Red, Green, Blue) and/or color infrared (IR) imagery, depending on the project requirements indicated in Section B-1.2. The digital sensor system shall be a tested, stable, geometrically calibrated system with appropriate documentation, suitable for use in precision photogrammetric orthoimagery applications.

- (a) Digital sensor acquisitions require the Contractor to comply with the technical requirements and specifications of this contract, and Attachment B: Specification for Digital Sensor Based Acquisition which defines the essential elements in securing high quality direct digital imagery.
- (b) The Contractor is required to provide a detailed technical description and sample image of the digital camera/sensor being proposed for use. See Section L-5, Digital Sensor Sample Imagery.
- (c) The digital sensor system shall have the appropriate image resolving power and field of view required to provide the GSD. The proposed direct digital sensor system shall have the capacity and the through-put necessary to acquire complete project item area quantities in accordance with delivery schedules as indicated herein.

### 3.4 Digital Orthoimagery

The Contractor is required to provide color or color infrared digital ortho-rectified imagery at the GSD resolution requirement. Two lists of the required predetermined quarter quadrangle tiles will be provided upon award (see Section B-4.2 and B-4.3). One list is to identify DOQQs required for complete physical coverage of the project item area; the second list is to identify DOQQs required for complete physical coverage of each CCM within a project item area.

- (a) Quarter Quadrangle Image Tiles. All quarter quadrangle tiles shall be full resolution, ortho-rectified, and projected in the 1983 North American Datum (NAD83), using the corresponding native Universal Transverse Mercator (UTM) zone. (See Section C-6.2)
- (b) Compressed County Mosaics. Mosaics shall be created using the imagery associated with the quarter quadrangle tiles created in the paragraph above. CCMs will be projected in the predominant UTM zone of the county. (See Section C-6.3)

### 3.5 Project Flight Planning Requirement

Contractor is required to provide the necessary flight line plans, which shall include flight altitude determinations, for the acquisition of precise vertical aerial imagery in accordance with the technical requirements in Section C-5.3.

### B-4 GOVERNMENT-FURNISHED PROPERTY

Pursuant to the Government-Furnished Property (GFP) clause (see Section I-9) the Government shall furnish the item(s) of property listed below as GFP to the Contractor.

#### 4.1 Flight Exposure Data

The Contractor will be furnished upon award one (1) data text file (.txt) containing the Official Flight Exposure Data. The data file contains the NAPP exposure identification numbers (see Section J, Exhibits 5 and 6), by latitude and longitude coordinates, expressed in degrees, minutes, seconds. The following is a sample of the data:

STATION NO.	LATITUDE	LONGITUDE
0912W-0497	39-30-00N	091-13-08W
0912W-0498	39-31-53N	091-13-08W
0912W-0499	39-33-45N	091-13-08W

#### 4.2 State Project Area – DOQQ List

The Contractor will be furnished upon award one (1) data text file (.txt) containing a list of all DOQQ tiles required for complete physical coverage of that state project area. The data text file will contain quad name, quadrant, state, latitude and longitude of the SE corner of the quad, USGS quad number, NAPP station number, latitude and longitude of the quad center, USDA arckey number, flying height AGL (for reference only), and the native UTM zone. The following is a sample of the data:

“AZTEC SE”, “SW”, “AZ”, “324500N”, “1131845W”, “3211314”, “1133W-0282”, “32-46-53N”, “113-20-38W”, “3245001131845”, 20000, 12
“AZTEC SE”, “NW”, “AZ”, “324845N”, “1131845W”, “3211314”, “1133W-0284”, “32-5038N”, “113-20-38W”, “3245001131845”, 20000, 12
“CALIENTE”, “SW”, “AZ”, “325230N”, “1131845W”, “3211306”, “1133W-0286”, “32-454-23N”, “113-20-38W”, “3252301131845”, 20000, 12

#### 4.3 Compressed County Mosaic Coverage – DOQQ List

The Contractor will be furnished upon award one (1) data text file (.txt) containing a list of all DOQQ tiles required for the creation of the CCM coverage for each county in that state project. The data text file will contain the same information and same format as the state list above (Section B-4.2). The UTM zone listed for a county mosaic will be the predominant zone that county is located in.

#### 4.4 Baseline Orthophoto Control Imagery

The Contractor will be furnished upon award baseline orthophoto imagery to be used for photogrammetric control for creation of the products required under this contract. The baseline orthophoto imagery will be furnished in a compressed format for each county identified in Attachment D: County Coverage Data.

#### 4.5 Metadata Template

The Contractor will be furnished upon award **two (2)** data text files (.txt) containing Federal Geographic Data Committee (FGDC) compliant metadata templates to be used when creating the **CCM and CCM shapefile** metadata as required in Section C-6.3(a).

### B-5 TASK ORDERS

#### 5.1 Minimum Contract Guarantee

The quantities of services and supplies specified herein are estimates only. The guaranteed minimum amount for the NAIP contract shall be a total of \$2,500.00, as met through the issuance of one or more task orders within the contract performance period as stated in Section B-5.2 below. See Section I-5, Order Limitations.

Awarded quantities shall be made by issuance of authorized task orders in accordance with specified ordering procedures. See Section I-2, Ordering, and Section L-3, Task Order Procedures.

#### 5.2 Contract Performance Period

(a) The contract performance period for the Base Year (FY2004) for issuance of task orders is: **Date of Award through December 31, 2004.**

(b) The contract performance period for the option years 1 (FY2005) and 2 (FY2006) follows in the subsequent calendar years, Option Year 1: **January 1 through December 31, 2005** and Option Year 2: **January 1 through December 31, 2006.**

(c) The Government reserves the right to exercise the option to extend the term of the contract for option years 1 and 2 based on the evaluation of contractors past performance

on previous task orders issued during the preceding contract performance period (See Section F-5.4).

### 5.3 Task Order Ombudsman

The Director of USDA-FSA-Aerial Photography Field Office shall serve as the Task Order Ombudsman responsible for reviewing complaints from the contractors and ensuring that all of the contractors are afforded a fair opportunity to be considered for task orders issued under this contract. To contact the task order Ombudsman please phone (801) 975-3500 ext. 205, or mail to: Director, APFO, 2222 West 2300 South, Salt Lake City, UT 84119.

## PART I - THE SCHEDULE

### SECTION C - DESCRIPTION/SPECIFICATIONS/WORK STATEMENT

#### C-1 SCOPE OF CONTRACT

The general scope of the contract is to procure precise current year digital orthoimagery. The orthoimagery will be used in the administration of FSA Compliance Programs and to update the USDA GIS Orthoimagery Base program. Other multi-agency program uses include, but are not limited to agriculture land use analysis, natural resource inventory, and extraction of data by means of photogrammetric measurements.

##### 1.1 Introduction

The Contractor is responsible for furnishing aerial photography and/or direct digital imagery services and related services and supplies in accordance with requirements, specifications, terms and conditions specified herein.

##### (a) Technical Requirements and Specifications

The technical requirements and specifications of this contract are described in this section and Attachments A and B, which define the essential elements in securing high quality digital orthoimagery. Any deviation from the specifications stated herein may cause increased time and effort in using the imagery as intended.

##### (b) Delivery and Performance

The delivery and performance requirements of this contract are described in Section F. All contract materials shall be shipped within the time limits and to the place of delivery specified herein. Performance of the contract shall be authorized and monitored by the Contracting Officer and/or the Contracting Officer's Representative.

##### (c) Quality Control

Quality control shall be exercised by the Contractor continuously throughout the performance of the contract, see Section C-8, Quality Control.

##### 1.2 Location of Work

The project item area(s), quantities, and acquisition periods are described in Section B-1.2 and shown in Attachment C: State Coverage Maps. The Contractor's place of performance where work will be performed on this contract shall be indicated in Section K-8, Place of Performance.

### 1.3 Project Management and Flight Planning

The Contractor is required to provide the necessary project management, coordination, and supervision to conduct project planning, flight line planning and acquisition, image processing, product delivery, and related technical and progress reports as required in the contract (see Section C-7, Project Management).

### 1.4 Labor and Materials

The Contractor shall furnish all materials, equipment, transportation, superintendence, and labor as required herein. The Contractor shall execute and finish the imagery acquisition, orthoimagery production and related services for the project specified and shall deliver to the USDA all materials called for in Section F-1, Materials to be Delivered.

## C-2 APPLICABLE DOCUMENTS

### 2.1 Attachments

The following documents attached to this solicitation document are considered requirements and specifications under the resulting contract(s), as applicable to the Contractor's technical proposal:

- (a) National Agriculture Imagery Program (NAIP) Specification for Film Based Acquisition, dated March 31, 2004 (Attachment A)
- (b) National Agriculture Imagery Program (NAIP) Specification for Digital Sensor Based Acquisition, dated March 31, 2004 (Attachment B)
- (c) State Project Maps (Attachment C)
- (d) County Coverage Data (Attachment D)

### 2.2 References

The following documents referenced in this solicitation document are considered requirements and specifications under the resulting contract(s), as applicable to the Contractor's technical proposal:

- (a) Federal Geographic Data Committee (FGDC) Specification, FGDC-STD-001-1998 ("Content Standard for Digital Geospatial Metadata")
- (b) Code of Federal Regulation (CFR) Title 14 ("Federal Aviation Regulations")
- (c) GeoTIFF Revision 1.0 Specification, dated December 28, 2000 (Version 1.8.2)
- (d) TIFF Specification Revision 6 dated June 3, 1992 (Adobe Systems Inc.)

## C-3 GENERAL REQUIREMENTS

The Contractor shall furnish all materials, equipment, transportation, superintendence, and labor required to plan, acquire, manage, process, and orthorectify aerial photographs and digital

imagery for the project item areas and requirements specified in Section B and shown on the State Project Maps in Attachment C of the contract.

#### C-4 EQUIPMENT REQUIREMENTS

Any equipment (aircraft and cameras/sensors, in addition to those submitted at the time of offer) proposed to be used by the Contractor must be approved for use by the Contracting Officer. If the aircraft and camera/sensor proposed for use are not owned by the Contractor, a written statement of availability from the owner of the equipment shall be furnished to the Contracting Officer (see Sections K-4 and K-5).

##### 4.1 Precision Aerial Mapping Camera/Digital Sensor

Tested and calibrated precision aerial cameras and digital sensors for acquiring aerial photographs/imagery are required and must meet contract specifications (see Attachments A and B). Camera systems must be compatible with precision stereoscopic mapping instruments and with analytical mensuration procedures used in photogrammetric surveys and in preparing accurate orthoimagery.

###### (a) Camera/Sensor Evaluation

Proposed film camera systems will be evaluated to determine if they meet the contract specifications, based on a current USGS camera calibration test report. Proposed digital sensor systems will be evaluated to determine if they meet the contract specifications, based on current technical descriptions and samples. The Contracting Officer shall have the right to require the removal of a camera/sensor from use when deficiencies in imagery attributable to the camera are found to exist. Any camera/sensor removed from use by the Contracting Officer shall not be returned to use on any APFO contracts until the cause of the malfunction is corrected to the satisfaction of the Contracting Officer. That determination will be based on acceptable samples, calibration reports, and/or an additional test by the Optical Science Laboratory of the USGS, if directed by the Contracting Officer.

###### (b) Camera/Sensor Operation

The camera/sensor and its mount shall be checked for proper installation prior to each mission. In conformance with conventional photogrammetric practice, it is the preference of the Government that the Contractor use camera/sensor configurations, that when installed in the aircraft, advances film/imagery parallel to the line of flight.

###### (c) Camera Accessories

Automatic Exposure Control. An automatic exposure control device is permitted, but a manual override capability is required for some types of terrain to achieve proper exposure.

Camera Mount. The camera mount shall be regularly serviced and maintained and shall be insulated against aircraft vibration.

Camera Port Glass. Aircraft camera port glass shall be preferably 50mm thick but not less than 32mm thick. The surface finish shall be 80/50 or better. Glass material shall be polished crown, group category M, Mil Specs Mil-W-1366F (ASG), dated October 1975, C-1 optical quality or better.

#### 4.2 Aircraft Requirements

##### (a) FAA Certification

All aircraft used in the performance of the work under this contract shall be maintained and operated in accordance with all regulations required by the U.S. Department of Transportation, Federal Aviation Administration (FAA). Aircraft operated in the acquisition of aerial photography or digital imagery under this contract shall be FAA certified to a service ceiling with operating load (crew, camera, film, oxygen, and other required equipment) of not less than the highest altitude required.

##### (b) Positive Control Airspace

The proposed project item areas may contain areas of controlled or restricted airspace. It is the responsibility of the Contractor to obtain all approvals necessary to assure that required clearances are achieved. When the flight plan and location of any project area coverage fall within positive-control airspace, the aircraft must contain the appropriate equipment to operate in such positive-control areas within the purview of the Federal Aviation Regulations. (See Section H-1, Permits and Clearances.)

##### (c) Aircraft Configuration

The design of the aircraft shall be such that when the camera is mounted with all its parts within the outer structure, an unobstructed field of view is obtained. The field of view shall be shielded from the exhaust gases, oil, effluence, and air turbulence. The camera port glass shall be free of scratches and of such quality that it will not degrade the resolution or the accuracy of the camera and shall conform to Section C-4.1(c), Camera Port Glass.

### C-5 IMAGERY ACQUISITION REQUIREMENTS

#### 5.1 Photographic Conditions

Imagery shall be acquired when skies are clear, free from smoke or excessive haze, and well-defined images can be resolved. DOQQ image tiles with greater than ten percent (10%) cloud cover or cloud shadows will not be acceptable. The ground shall be free from standing water (other than natural or man-made ponds and lakes), flood waters from streams which have overflowed their banks, and wet ground which obscures field, soil or crop lines.

## 5.2 Reference System for Aerial Photography/Digital Imagery

The location of all project exposure stations can be determined according to a reference system based on 7½ minute quadrangles within one-degree blocks (See Section J, Exhibit 5, Flight Line Exposure Station Reference System).

- (a) Flight Line Numbers consist of three elements: 1) the eastern longitude of the one degree block, 2) the number assigned to the 7½ minute column within one degree by one degree area, and 3) the east (E) or west (W) flight line within that 7½ minute column.
- (b) Exposure Station Numbers are determined by a uniform system of pre-numbered stations running from south to north (See Section J, Exhibit 6, NAPP Exposure Station Reference System).
- (c) Reference Example. Thus an example of an exposure located at 41 degrees latitude, 93 degrees 1.875 minutes longitude would be designated as: 0931E-0545.

## 5.3 Flight Planning

The Contractor shall provide flight line **planning** necessary to acquire precision, high quality imagery for the production of digital quarter quadrangle centered orthoimagery, which shall include at a minimum, flight altitude determinations and overlap stereoscopic coverage. The boundaries and exact coverage of any project item area are determined only by the official State Project Area-DOQQ List. For a general representation of project area coverage, see Attachment C, State Project Maps.

## 5.4 Flight Requirements

The Contractor shall obtain precise vertical aerial photography or digital imagery in accordance with the following technical requirements:

- (a) Acquisition Periods. The Contractor shall acquire imagery only during that portion of the day when the sun angle exceeds the minimum 30 degrees. The Contractor shall limit operations to the dates specified in Section B-1.2 of the contract or as otherwise provided in writing by the Contracting Officer as stated under Section F-5, Performance of the Work.
- (b) Tilt. It is desired that exposures be made when the optical axis of the camera/sensor is in a vertical position. The Contractor shall not acquire imagery when the tilt (departure from the vertical) of any exposure exceeding four degrees (4°) or relative tilt between any two successive exposures exceeding six degrees (6°). Tilt shall not average more than 2 degrees in any 16 km (10 mile) section of a flight line and shall not average more than 1 degree for the entire project.

## C-6 DIGITAL IMAGERY PROCESSING

### 6.1 Radiometric Corrections

The Contractor shall ensure all digital images have proper histograms, color balance, color saturation, and tone balance.

- (a) The histogram of digital images must represent all the pixels within the digital image without clipping highlight or shadow detail from the image.
- (b) Color balance is defined as balancing the color between the three primary colors and their complimentary secondary color. Red and cyan must be balanced. Green and magenta must be balanced. Blue and yellow must be balanced.
- (c) Color Saturation is achieved so that minimum colors do not look like a grayscale image and the maximum colors do not bleed into another area of the image.

### 6.2 Quarter Quadrangle Image Tile

Contractor shall provide rectification services to produce digital orthophoto imagery at the resolution requested in Section B-1.2. The digital image shall cover the entire image area of one USGS standard quarter quadrangle (QQ), with a 300 meter buffer on all four sides of the QQ and shall be projected in the NAD83 Datum, using corresponding native UTM zone. The digital image shall be a georeferenced tagged image file format (GeoTIFF). The final tile shall not contain any borders, artifacts, or other non-image items.

- (a) Accuracy Requirements (one meter): The accuracy standard for the 1-meter orthorectified images requires that 90% of all well-defined points tested must fall within three (3) meters of the same location identified on Government furnished baseline orthophoto control imagery.
- (b) Accuracy Requirements (two meter). The accuracy standard for the 2-meter orthorectified images requires that 90% of all well-defined points tested must fall within ten (10) meters of the same location identified on Government furnished baseline orthophoto control imagery.
- (c) Media Requirements: All quarterquadrangle image tiles shall be delivered on super DLT tapes as defined in Section D-1.2(b), Tape Cartridge. No more than one project item area may be placed on a tape.
  - (1) Table of Content. The Contractor shall include an ASCII text file which is a listing of all quarter quadrangle tiles included on the tape in the order they appear in the archive file. The content file must be the first file on the tape and named content\_<item#>\_<state>\_<tape#>.txt (i.e., “content\_3-04-1\_mo\_1.txt”). The file should contain, at a minimum, the following attributes:

<u>Description</u>	<u>Number of Characters in Field</u>
File Name	30
<u>Example:</u>	c_3509320_ne_15_1_20040721.tif

- (2) Archive File. No other archive members will be allowed on any tape. Archive files shall not contain symbolic links, use compression of any type, be created using GNU extensions, or as the super user (e.g., root). Archive member names must not contain a directory structure.
- (3) Tagged Image Files (TIFF). All tagged image files shall be submitted in accordance with the GeoTIFF standard and “Baseline TIFF 6.0” file format as defined in the GeoTIFF and TIFF 6.0 Specifications. All baseline TIFF 6.0 files shall store data as uncompressed RGB full-color images as defined in the specification using the “little-endian” byte order and shall only contain one image file directory (IFD).

All TIFF files submitted shall be readable by older applications that assume TIFF 5.0 or an earlier version of the specification. TIFFs that use designated "Extended TIFF 6.0 file" features shall not be acceptable. Features designated as "not recommended for general data interchange" are considered extensions to the Baseline TIFF 6.0 specification, and will not be acceptable. This includes TIFFs that use one of the major new extensions such as "tiled images".

In the TIFF 6.0 specification, the term "tag" refers only to the identifying number, the term "field" refers to the entire field, including the value. Tags that are defined by the TIFF specification are called public tags and shall not be modified outside of the parameters given in the latest TIFF specification. Tags numbered 32768 or higher, sometimes called private tags, are reserved and shall not be acceptable. Enumeration constants numbered 32768 or higher are reserved and shall not be acceptable. Do not choose your own tag numbers, use only those specified in the Baseline TIFF 6.0 Specification for RGB full-color. Tags numbered in the "reusable" 65000-65535 range shall not be acceptable.

### 6.3 Compressed County Mosaics

The Contractor shall produce compressed county mosaic (CCM) files using the imagery associated with the quarter quadrangle tiles created in Section C-6.2. For counties that are split by UTM zone lines, the county shall be projected in the UTM zone listed in Attachment D, County Coverage Data. A listing of the required quarter quadrangle image tiles for each individual county will be provided upon contract award.

The CCMs shall be compressed using LizardTech's MrSID<sup>®</sup> software and shall be saved in MrSID<sup>®</sup> Generation Two (MG2) format in accordance with Section F-1.1. When making

the CCM, the Contractor shall use the highest N-level (i.e., 9) or (Z)oom-level to maximize the number of pyramid layers.

(a) Metadata Requirements:

- (1) Metadata. The Contractor shall create a Federal Geographic Data Committee (FGDC) compliant, per the FGDC-STD-001-1998 specification, metadata file using the Government provided template for each CCM generated. The metadata must parse cleanly through the USGS metadata parser “mp” version 2.8.10 without any errors. The metadata file shall have the same file name as the CCM but with an “.met” extension to prevent the MrSID® “.txt” from being overwritten.
- (2) Auxiliary File. The Contractor shall provide an ESRI Projection compatible “aux” file for each CCM. The file shall use the same naming convention as the CCM but with an “aux” extension.
- (3) MrSid Log File. **The Contractor shall provide the “text” file created when generating the CCM. The file shall use the same naming convention as the CCM but with an “txt” extension.**

(b) Shapefile. The Contractor shall provide a county-based CCM shapefile of the DOQQ seamline index, with each DOQQ polygon attributed with the USGC Geographic Name Information System (GNIS) quad name, the date(s) of imagery capture, **color type, image tile identifier, latitude and longitude of the southeast corner.** The Contractor shall create a metadata file for the shapefile using the same requirements in C-6.3(a)(1) with the exception of the file name. The files shall use the same naming convention as the CCM but without the compression format (see example below). The shapefiles shall use the standard extensions (i.e., .shp, .shx, .dbf, and .prj) and the metadata shall use a “.met” extension.

<u>Attribute Data</u>	<u>Column name</u>	<u>Example</u>
DOQQ name	<b>QQName</b>	Fort Douglas NE
Image date (YYYYMMDD)	<b>IDAT</b>	20040822, 20040830
<b>Color Type</b>	<b>BCON</b>	<b>NC</b>
<b>Image tile identifier</b>	<b>DOQQ</b>	<b>n4210337.nw</b>
<b>Southeast DOQQ corner</b>	<b>QKEY</b>	<b>422615N1032615W</b>

File Name Example: naip\_1-1\_1n\_mo137\_2004\_1.shp  
naip\_1-1\_1n\_mo137\_2004\_1.shx  
naip\_1-1\_1n\_mo137\_2004\_1.dbf  
naip\_1-1\_1n\_mo137\_2004\_1.prj  
naip\_1-1\_1n\_mo137\_2004\_1.met

(c) Media Requirements. The CD-ROM shall only contain single county data. The required format for all county mosaics are the MG2 files generated by the MrSID® software (i.e., .sid, .sdw, and .txt). Compression ratio is as follows:

2-Meter color imagery	1:50
1-Meter color or color infrared imagery	1:50

(d) Tone Balance. The Contractor shall tone balance the composite DOQQs to give the CCM a consistent and uniform image quality appearance that eliminates any

checkerboard effect. The resulting CCM must maintain the original color and appearance of the color corrected images that comprise the CCM.

- (e) Accuracy Requirements. The accuracy requirements from C-6.2(a) or (b) shall be preserved when creating the CCM using the imagery associated with the quarter quadrangle tiles.

## C-7 PROJECT MANAGEMENT

The Contractor shall establish and maintain a project management system with a designated project manager for this effort. Project management consists of those activities required to plan, manage, administer, and control efforts to accomplish the objective of the contract. The project manager will serve as the primary point of contact for the Contractor's activity with the Government. The project manager's name and contact information shall be identified, in writing, to the Contracting Officer within 20 days of contract award.

### 7.1 Progress Reports

A Progress Report is required for each day progress is made in acquiring project photography. Reports shall be transmitted by e-mail following each day of progress. E-mail address will be provided at contract award. See Section F-5.2 for instructions and Section J, Exhibit 3, Progress Report for syntax and example.

### 7.2 Subcontract Management

If the Contractor uses subcontractors in the performance of the contract, a plan and procedure will be established to manage its subcontractors. Contractor should give prior notification of any subcontracts in accordance with G-4, Subcontracts. The Contractor is encouraged to maximize its use of partnerships and subcontractors to accomplish the requirements of this contract. However, the Contractor is solely responsible for the performance and cost control of its partnerships and subcontractors.

### 7.3 Project Data Files

- (a) Production Process. The Contractor shall create brief descriptions of the digital image processing system which shall include a narrative explanation of the process steps taken to produce the imagery in accordance with Section F-1.6(a) and the FGDC specification, paragraph 2.5.2.1, Process Description. Separate descriptions are required for the quarter quadrangle image tiles and CCM.
- (b) Project Data Files. The Contractor shall create a project description file in accordance with Section F-1.6(b) of this contract. Contractor shall include a project data file containing, at a minimum, the following data:

Description:

Project Item Area (name as it appears in Section B-1.2)  
 Contract Award Number (to be assigned upon award, USDA-NAIP-3-04-1)  
 State (2 digit Abbreviation - MO, KS, etc.)  
 Nominal Photo Scale  
 Nominal Lens Focal Length  
 Film Type (CP, CIRP, DIGITAL)  
 Number of Film Rolls (as applicable)  
 Coordinate System Datum  
 Coordinate Data Collection Method (GPS, Digitizing, etc.)  
 [For GPS Collection - Antenna offset in meters]  
 Estimated Accuracy of Coordinates (within Meters)  
 Standard Deviation in meters  
 Date ASCII Exposure Data File was created (YYYYMMDD)  
 Scanner Manufacturer and Model Number: "Free text with quotations" (50 characters max)  
 Production System used to produce images: "Free text with quotations" (50 characters max)

Example:

Missouri,USDA-NAIP-3-04-1,MO,1:40,000,153mm,CP,35,NAD83,  
 GPS,1.7m,50m,1.45m,20040801,"LHS XXXXX Photogrammetric  
 Scanner", "production hardware & software description"

- (c) Photo-Center Data File. The Contractor shall create a photo-center data file for frame-based capture systems (include all aerial photography and “frame capture” direct digital sensors) delivery under this contract in accordance with Section F-1.6(c). Contractor shall include a photo-center data file containing, at a minimum, the following attributes:

<u>DESCRIPTION</u>	<u>NUMBER OF CHARACTERS IN FIELD</u>
Project Code (NAIP<YY>)	6
Film Roll Number	6*
Exposure Number	3
Date of Exposure (YYYYMMDD)	8
NAPP Flight Line/Photo Station Number (0996W-0572)	10
Camera Lens Serial Number	10
Calibrated Focal Length in millimeters (mm)	7
Latitude (DD.DDDDD)	8
Longitude (- DDD.DDDDD (Negative))	10
Flight Altitude in meters at camera (MMMMM.MM; MSL)	8
Exposure used for quarter quadrangle tile creation (Y/N)	1**

\* Roll number should be padded with leading zeros.

\*\* The exposure used to create an image (marked "Y" as indicated above) must record the accurate photo date from the film and be reflected within the photo-center data file.

Example:

NAIP04,01001,222,20040721,0996W-0572,12345678,153.002,42.71936, -123.41498, 07048.63,Y

(d) Scan Data File. The Contractor shall create a scan data file listing all scanned images required under Attachment A in accordance with Section F-1.6(d). Contractor shall include a scan data file containing, at a minimum, the following attributes:

<u>Description</u>	<u>Number of Characters in Field</u>
Scan File Name:	30
Film Roll:	5*
Exposure Number:	3
Samples = Columns:	4
Lines = Rows:	4

\* Roll number should be padded with leading zeros.

Example: c\_3509320\_ne\_15\_1\_20040721.tif,01001,203,4759,4821

## C-8 QUALITY CONTROL

Quality control shall be exercised by the Contractor continuously throughout the performance of the contract. Procedures shall be established to assure that all contract materials are delivered in accordance with the delivery schedule and at the required level of accuracy and quality. The Contractor shall inspect and constantly monitor the image quality and coverage, and shall undertake immediate reflights of any imagery where the quality fails to meet minimum requirements of the contract specifications. Any marginal photography/imagery submitted for inspection which does not meet minimum requirements may be rejected. The marginal photography may be accepted, at the Government's convenience, but shall be subject to a price reduction based on the diminished usability of the product. The nature and urgency of this project may require the Government to make equitable financial adjustments for materials deemed rejectable or where product use is adversely impacted. USDA inspection and acceptance procedures are described in Section E, Inspection and Acceptance.

### 8.1 Accuracy and Quality Control Report

The Contractor shall provide RMSE accuracy reports and quality control reports generated during the AT or orthorectification processes for all 1 meter quarter quadrangle image tiles in accordance with Section F-1.3.

## PART I - THE SCHEDULE

### SECTION D - PACKAGING AND MARKING

#### D-1 PREPARATION OF MATERIALS FOR SHIPMENT

##### 1.1 Film, Film Cans, and Labels

All film shall be thoroughly cleaned and placed on spools of the specified size stated in Attachment A, Specification for NAIP Film Based Acquisition, with the emulsion facing the core of the spool. The use of any adhesive tape product, such as masking tape, which leaves residual adhesive on the film is prohibited. All aerial film rolls shall be shipped in sturdy cylindrical plastic cans. Film can labels will be furnished by the APFO. The Contractor is required to prepare a label to be fastened to the outside of each can in accordance with the example in Attachment A.

##### 1.2 Digital Files

All digital imagery and text files shall be labeled and shipped in packaging designed for their protection.

- (a) Compact Disks. All compact disks (CDs) shall be delivered on archival media, 700 Megabytes (80-minute) per disk CD-R, ISO 9660 Mode 1 format using level 2 interchange. The Contractor must insure that each and every copy session has been properly closed. No multi-session enabled CDs shall be acceptable. The CD media shall have a label attached identifying the digital contents of the CD in accordance with Section J, Exhibit 2, Figures 1 and 2 (thermal printed CDs are acceptable). In addition to the packaging requirements in D-2, all CD media shall be packaged in standard single CD jewel cases (5-5/8" x 4-15/16" x 3/8") with a clear front cover. The CD label should be readable without opening the case or removing the CD from the case. "Slim" or other non-standard sized jewel cases will not be accepted.

Mosaic files too large to fit on one CD-ROM shall be divided along lines of longitude or latitude through the entire length and or width of the county, with no deviations. Overlapping imagery of one DOQQ shall be provided along both sides of the division. In counties divided by UTM zone lines, DOQQ tiles will be re-projected into the predominant UTM zone for CCMs. Full resolution DOQQ image tiles shall be submitted in their native UTM zone.

- (b) Tape Cartridges. All tapes shall be delivered on Super DLT 1 cartridges using the Quantum SDLT 320 Tape Drive set at native capacity (160 gigabytes). Other tape systems or formats, including hardware compression, will not be accepted. Tape media shall be written using GNU tar utility version 1.13 set at fixed block of 512 bytes and a blocking factor of 128, thus creating a physical record size of 65,536 bytes. No other fixed block size or blocking factor shall be accepted. The tape media and case shall be labeled in accordance with Exhibit 2, Figure 3. In addition to the packaging requirements in D-2, all tapes shall be packaged in their appropriate case.

## D-2 PACKAGING FOR SHIPMENT

All material shall be packed for shipment in such a manner that will insure acceptance by common carrier and safe delivery at destination. Containers and closures shall comply with the Interstate Commerce Commission regulations, Uniform Freight Classification rules, or regulations of other carriers as applicable to the mode of transportation. Damaged materials will be replaced by the Contractor at no cost to the Government.

A packing slip shall accompany each shipment. It shall itemize all material included in the shipment.

## D-3 SHIPPING RECEIPTS

Receipts from common carriers for shipment of materials shall be retained by the Contractor and be made available to the Contracting Officer upon request.

## D-4 SHIPPING CONTAINER MARKINGS

All shipping containers shall be clearly marked with delivery address. See Section F-2.

## PART I -THE SCHEDULE

### SECTION E - INSPECTION AND ACCEPTANCE

#### E-1 INSPECTION AND ACCEPTANCE (FEB 1988)(AGAR 452.246-70)

The Contracting Officer or the Contracting Officer's duly authorized representative will inspect and accept the supplies and/or services to be provided under this contract.

Inspection and acceptance will be performed at:

Aerial Photography Field Office  
2222 West 2300 South  
Salt Lake City, Utah 84119-2020

#### E-2 INSPECTION PROCEDURE

All materials specified in Section F-1 will be inspected to determine conformance to all contract requirements and specifications. Inspection of the Compressed County Mosaics will be performed utilizing an expedited method of checking general compliance to specifications. Inspection of the Quarter Quadrangle Image Tiles will be performed utilizing a comprehensive method of quality assurance inspection procedures including a random sampling technique to test for compliance to the horizontal accuracy requirement in the imagery delivered. See Section C-6.2(a) and C-6.3(a) for the accuracy standard requirements. (Refer to FAR 52.246-2, Inspection of Supplies-Fixed Price and FAR 52.246-4, Inspection of Services-Fixed Price.)

If inspection of materials reveal deficiencies that may cause increased time and effort in using the digital imagery and aerial photography as intended, the Government may require the Contractor to perform the services again in conformity with contract requirements, at no increase in contract amount. When the defects in services cannot be corrected by re-performance, the Government may:

- (a) Require the Contractor to take necessary action to ensure that future performance conforms to contract requirements and
- (b) Reduce the contract price to reflect the reduced value of services performed.

#### E-3 INSPECTION SCHEDULE

The Government will make every effort to inspect the Compressed County Mosaic material within 30 calendar days after they are received at the point designated. Should the inspection procedure be delayed longer than 30 days, the Contractor will be notified of the reason(s) for

delay and given the estimated completion date. Contract materials will be inspected in the order of their receipt, unless otherwise prioritized by the Government.

The Government will make every effort to inspect the Quarter Quadrangle Image Tiles and related data material within 12 months after they are received at the point designated. Should the inspection procedure be delayed longer than 12 months, the Contractor will be notified of the reason(s) for delay and given the estimated completion date. Contract materials will be inspected in the order of their receipt, unless otherwise prioritized by the Government.

The Contractor will be notified in writing whether the materials are satisfactory and what materials, if any, shall be remade because of non-conformance with contract requirements.

#### E-4 PRELIMINARY INSPECTION

USDA will perform a comprehensive inspection of all contract materials submitted to determine compliance to contract requirements. A preliminary inspection of the Compressed County Mosaic digital imagery submitted will be prioritized to expedite delivery to users. Based on this preliminary inspection, a contract status report will be generated recording all acceptable county imagery as well as rejectable imagery and the deficiencies discovered. Final acceptance will be determined from the combined inspection results covering all contract materials submitted.

#### E-5 PARTIAL COVERAGE

If the Contractor obtains only partial coverage for any project item area and/or county during the season, all partial imagery shall be processed and delivered according to the requirements specified for completed imagery. The requirement for processing partial coverage may be waived only by the Contracting Officer.

#### E-6 ACCEPTANCE

Final acceptance will be made after inspection by the Government of all required materials delivered at the specified destination. Delivery dates for individual products by project item areas are specified under Section F-3. The acceptance date shall be the date of the letter, by the Government to the Contractor, stating all materials are acceptable and an invoice may be submitted.

Partial acceptance on any fully completed project due to rejection of deficient or non-compliant material will be made based on both preliminary inspection results of the digital imagery and the final inspection results of all remaining materials. A partial acceptance will result in a contract price reduction based on the final determination of contract material compliance to contract requirements and specifications.

Partial acceptance on any uncompleted area will be made only after the photographic season has ended and all materials required for the partial area have been delivered, inspected, and accepted by the Government. The acceptance date shall be the date of the letter by the Government to the Contractor identifying the amount of partial acceptance and referring the Contractor to the Contracting Officer.

E-7 CLAUSES INCORPORATED BY REFERENCE (FEB 1998) (FAR 52.252-2)

This contract incorporates one or more clauses by reference, with the same force and effect as if they were given in full text. Upon request, the Contracting Officer will make their full text available. Also, the full text of a clause may be accessed electronically at this address: [www.arnet.gov/far](http://www.arnet.gov/far).

FEDERAL ACQUISITION REGULATION (48 CFR CHAPTER 1) CLAUSES:

- 52.246-02 Inspection of Supplies - Fixed Price (AUG 1996)
- 52.246-04 Inspection of Services - Fixed Price (AUG 1996)
- 52.246-16 Responsibility for Supplies (APR 1984)

PART I - THE SCHEDULE

SECTION F - DELIVERIES OR PERFORMANCE

F-1 MATERIALS TO BE DELIVERED

The materials as specified in Section B for Project Item(s) shall be delivered as required and consist of the following items. The Contractor shall maintain a copy of the digital data until APFO acknowledges receipt. The Government **strongly encourages** the Contractor to submit any/all data when it becomes available and not wait for a “complete set” prior to submitting. This incremental approach will allow the Government to inspect the data more efficiently and provide a more timely acceptance/rejection turnaround to the Contractor.

1.1 COMPRESSED COUNTY MOSAICS

Item	Requirement
Format	LizardTech’s MrSID® (see Section C-6.3)
Media	CD-ROM (see Section D-1. 2(a))
Naming Convention	See Section J, Exhibit 1 (i.e. naip_1-1_1n_s _mo137_2004_1.sid)
Quantity	Three (3)
Date of First Submittal	No later than thirty (30) calendar days after acquisition period. <b>Early and/or incremental delivery is highly encouraged to ease USDA program time constraints.</b>
Submittal Frequency	Once
Government Approval Required	Yes (see Section E)
Required Metadata	Yes (see Section C-6.3(a))

1.2 QUARTER QUADRANGLE IMAGE TILES

Item	Requirement
Format	GeoTIFF
Media	Tape (see Section D-1.2(b))
Naming Convention	See Section J, Exhibit 1 (i.e. “c_3509320_ne_15_1_20040721.tif”)
Quantity	One (1)
Date of First Submittal	No later than 90 calendar days after acquisition period
Submittal Frequency	Once
Government Approval Required	Yes (see Section E)
Required Metadata	Yes (see Section 6.2(c))

1.3 RMSE ACCURACY AND QUALITY CONTROL REPORTS (1 METER ONLY)

Item	Requirement
Format	ASCII preferred
Media	CD-ROM (see Section D-1. 2(a))
Naming Convention	None
Quantity	One (1)
Date of First Submittal	Delivered with Production Process (see Section F-1.6(a))
Submittal Frequency	Once
Government Approval Required	No
Required Metadata	None

1.4 ORIGINAL AERIAL FILM (AERIAL PHOTOGRAPHY ONLY)

Item	Requirement
Format	<i>1:40,000 Scale, Quarter Quad Centered</i>
Media	Photographic film (see Attachment A)
Quantity	One (1) set
Date of First Submittal	No later than 90 calendar days after acquisition period
Submittal Frequency	Once
Government Approval Required	Yes (see Section E)
Required Metadata	None

1.5 PROGRESS REPORTS

Item	Requirement
Format	See Exhibit 3
Media	Electronic mail
Quantity	One per day per crew
Date of First Submittal	Daily (as required in accordance with Section C- 7.1)
Submittal Frequency	Daily (only required for days that aerial acquisition was accomplished)
Government Approval Required	No
Required Metadata	None

1.6 PROJECT DATA FILES

(a) PRODUCTION PROCESS DESCRIPTION

Item	Requirement
Format	ASCII text file
Media	CD-ROM (see Section D-1.2(a))
Naming Convention	See Section J, Exhibit 1
Quantity	One (1) for DOQQ and one (1) for CCM per project item area
Date of First Submittal	No later than 90 calendar days after acquisition period
Submittal Frequency	Once
Government Approval Required	No
Required Metadata	None

(b) PROJECT DATA FILE DESCRIPTION

Item	Requirement
Format	ASCII comma delimited text file
Media	CD-ROM (see Section D-1.2(a))
Naming Convention	See Section J, Exhibit 1
Quantity	One (1) per project item area
Date of First Submittal	Delivered with Production Process (see Section F-1.6(a))
Submittal Frequency	Once
Government Approval Required	No
Required Metadata	None

(c) PHOTO-CENTER DATA FILE DESCRIPTION

Item	Requirement
Format	ASCII comma delimited text file
Media	CD-ROM (see Section D-1. 2(a))
Naming Convention	See Section J, Exhibit 1
Quantity	One (1) per project item area
Date of First Submittal	Delivered with film (see F-1.4) for film-based acquisition or Production Process (see Section F-1.6(a)).
Submittal Frequency	Once
Government Approval Required	No
Required Metadata	None

(d) SCAN DATA FILE DESCRIPTION (AERIAL PHOTOGRAPHY ONLY)

Item	Requirement
Format	ASCII comma delimited text file
Media	CD-ROM (see Section D-1. 2(a))
Naming Convention	See Section J, Exhibit 1
Quantity	One (1) per project item area
Date of First Submittal	Delivered with Production Process (see Section F-1.6(a))
Submittal Frequency	Once
Government Approval Required	No
Required Metadata	None

F-2 PLACE OF DELIVERY - FOB DESTINATION, WITHIN CONSIGNEE'S PREMISES

The materials to be furnished hereunder shall be delivered, all transportation charges paid by the Contractor, and in accordance with FAR Clause 52.247-35, F.o.b. Destination, Within Consignee's Premises, to:

USDA Aerial Photography Field Office  
Attn: Contracting Officer  
2222 West 2300 South  
Salt Lake City, Utah 84119-2020

Offers submitted on a basis other than F.o.b. Destination within consignee's premises will be deemed unacceptable or rejected as non-responsive.

F-3 SCHEDULE FOR DELIVERY OF MATERIALS

All delivery materials required in this contract shall be shipped within the time limits specified below. Failure to ship within this period will be considered as failure by the Contractor to prosecute the work as to ensure completion and will render the contract subject to default. Date of shipment will be shown by postmark or carrier receipt.

3.1 Original Materials - Delivery Schedule

The compressed county files shall be shipped as soon as completed, no later than 30 calendar days after the acquisition period end date for each project area/state, prior to shipment of all remaining contract materials, to provide timely data to the user. The compressed county file must be received by the user as soon as available due to user program time constraints.

The required delivery schedule for all remaining contract materials required for a project item shall be shipped no later than 90 calendar days after the acquisition period has ended, or any season extension thereof.

It is recommended that materials be shipped when completed, since prompt delivery of materials will better assure timely inspection and avoidance of peak seasonal workload delivery. See Section B-1.2 for acquisition periods for individual project area/state.

### 3.2 Remake Materials - Delivery Schedule

Remake materials shall be shipped as soon as possible after correction is made, but no later than 30 days after receipt in the Contractor's facility of the materials or data required to make the corrections. Only materials as specifically requested by USDA to be remade shall be submitted for inspection. Signed delivery receipts will be required to verify date of receipt of such data or materials by the Contractor.

## F-4 CONTRACTOR'S RESPONSIBILITIES

The Contractor shall: furnish all materials, superintendence, labor, transportation, and equipment; execute and complete the imagery acquisition of the area(s) specified and deliver to the USDA the materials called for; execute all work expeditiously, to the satisfaction of the Contracting Officer or authorized Contracting Officer's Representative(s).

## F-5 PERFORMANCE OF THE WORK

The Contracting Officer will authorize and direct the acquisition period to begin or end anytime within thirty (30) days before or after the approximate acquisition dates given in Section B, depending upon the weather, ground, foliage, and sun angle conditions required for the project item or area. No imagery shall be undertaken before the Notice to Proceed is issued or after the final date of the acquisition period (or its extension) has occurred. Weather and ground conditions for all project locations will be monitored daily to determine Contractor compliance to performance requirements.

### 5.1 Notice To Proceed

The Notice to Proceed will be given by telephone and confirmed in writing by regular mail. Failure of the Contractor to proceed with flights on a project item area within 10 calendar days after a "Notice to Proceed" is given, may be considered as evidence of failure to prosecute the work so as to ensure its timely completion. As evidence of performance, Progress Reports shall be submitted.

## 5.2 Progress Reports

Progress Reports indicating the progress made in acquiring project aerial photography shall be prepared in accordance with instructions in Section J, Exhibit 3, Progress Reports. Reports shall be submitted only for days performance was accomplished.

Each progress report shall be sent by email transmission not later than the day following performance. In the event that day is a holiday or non-business day, the report shall be sent on the next business day. Separate reports are required from each photographic crew assigned to a project item. Such "next day" reporting shall start when the Contractor receives the Notice to Proceed, and continue until the item is completed or the photographic season and any extension ends.

If it is determined that a season extension or additional flying is required, or reflights are ordered by USDA, reports covering such performance periods shall be submitted.

## 5.3 Acquisition Period Extension

The Government reserves the right to extend the acquisition period of this contract beyond the approximate period indicated in Section B. A lower minimum sun angle requirement may be necessary to allow the season extension.

The Government may extend the season of this contract, at no increase in price, by written notice to the Contractor at any time prior to the end of the acquisition period. (Refer to FAR 52.217-08 "Option to Extend Services".)

## 5.4 Option to Extend the Term of the Contract (MAR 2000) (FAR 52.217-09)

- (a) The Government may extend the term of this contract by written notice to the Contractor within **90** days of the end of the base and any option period; provided that the Government give the Contractor a preliminary written notice of its intent to extend at least **30** days before the contract expires. The preliminary notice does not commit the Government to an extension.
- (b) If the Government exercises this option, the extended contract shall be considered to include this option clause.
- (c) The total duration of this contract, including the exercise of any options under this clause, shall not exceed **2 years 8 months**.

## F-6 CLAUSES INCORPORATED BY REFERENCE (FEB 1998) (FAR 52.252-2)

This contract incorporates one or more clauses by reference, with the same force and effect as if they were given in full text. Upon request, the Contracting Officer will make their

full text available. Also, the full text of a clause may be accessed electronically at this address: [www.arnet.gov/far](http://www.arnet.gov/far).

FEDERAL ACQUISITION REGULATION (48 CFR CHAPTER 1) CLAUSES:

52.242-15 Stop Work Order (AUG 1989)

52.242-17 Government Delay of Work (APR 1984)

## PART I - THE SCHEDULE

### SECTION G - CONTRACT ADMINISTRATION DATA

#### G-1 CONTRACTING OFFICE

The Aerial Photography Field Office (APFO) of the United States Department of Agriculture (USDA), Farm Service Agency (FSA), is responsible for the solicitation, award, and administration of this contract.

Communications shall be directed to:

Contracting Officer, USDA - FSA  
Aerial Photography Field Office  
2222 West 2300 South  
Salt Lake City, Utah 84119-2020

Telephone (801) 975-3500 Ext. 207  
Facsimile (801) 975-3529

Written correspondence shall reference the contract number and/or solicitation number plus project item number.

#### G-2 CONTRACTING OFFICER'S REPRESENTATIVE

Each awarded contract item may have a Contracting Officer's Representative (COR) or a Contracting Officer's Technical Representative (COTR). Such designations will be made either at the time of award or by appointment letter.

#### G-3 CONTRACT INTERPRETATION

Technical assistance regarding interpretation of the specifications and/or terms of the contract will be provided by the Contracting Officer or the COR. Only the Contracting Officer has authority to award, modify, and terminate contracts. The Contractor is encouraged to visit the USDA-APFO facilities and discuss the contract and inspection procedures.

##### 3.1 Discrepancies

Any discrepancy in the schedule or official flight data shall be immediately called to the attention of the Contracting Officer for decision. A discrepancy shall not be adjusted without approval of the Contracting Officer, except at the Contractor's own risk and expense.

#### G-4 SUBCONTRACTS

Before entering into a subcontract covering any part of the work called for, the Contractor shall inform the Contracting Officer and submit information required by the Contracting Officer to determine acceptability and approval of the anticipated subcontractor's equipment to be used.

#### G-5 CHARGES TO CONTRACTOR

The USDA may, at its option, correct deficiencies found to exist in connection with materials submitted by the Contractor and deduct from the Contractor's vouchers the cost thereof to the Government. When the deficiencies to be corrected are such that the cost exceeds \$500.00 at current prices, such corrections will be made only with the prior approval of the Contractor, except in the event of termination for default.

#### G-6 INVOICES

One original invoice shall be submitted to the Contracting Officer designated in this contract. To constitute a proper invoice, the invoice must include the following information and/or attached documentation:

- (a) Name and address of the Contractor
- (b) Invoice date.
- (c) Contract number, or other authorization for supplies delivered or services performed.
- (d) Description, quantity, unit of measure, unit price, and extended price of supplies delivered or services performed.
- (e) Shipping and payment terms.
- (f) Name (where practicable), title, phone number, and complete mailing address of responsible official to whom payment is to be sent.
- (g) Any other information or documentation required by the contract.
- (h) While not required, contractors are strongly encouraged to assign an identification number to each invoice.

Notice of an apparent error, defect, or impropriety in an invoice will be given to the Contractor within 7 days of receipt of an invoice and suitable documented.

#### G-7 PERFORMANCE-BASED PAYMENTS

The Contractor shall adhere to the following performance-based payment description and schedule. Reference Section I-7 Performance-Based Payments (FAR 52.232-32).

7.1 Performance-Based Payments

(a) Proper invoices, see Section G-6, for authorized performance-based payments shall be submitted by a Project Item Area basis.

(b) Upon completion of imagery acquisition, or at the end of the established acquisition period or any granted extension period, for each Project Item Area, the Contractor may submit an invoice for a maximum of 60% (sixty percent) of the total number of DOQQs acquired multiplied by the awarded unit price.

(c) Upon final delivery of all required products for each Project Item Area, the Contractor may submit an invoice for a maximum of 30% (thirty percent) of the total number of DOQQs acquired multiplied by the awarded unit price.

(d) No other performance-based payments shall be issued without the Contracting Officer's approval.

7.2 Performance Criterion

The Contractor's request for performance-based payment shall contain the following information and documentation for basis for payment, in addition to information and certification required in FAR Clause 52.232-32, Performance-Based Payments:

(a) Documentation such as orders, invoices, or receipts, indicating the purchase of aerial film to be used on this project.

(b) Documentation such as orders, invoices, or receipts, indicating the processing and developing of the aerial film to be used on this project.

7.3 Final Acceptance

Upon final acceptance by the Government of a Project Line Item, a proper invoice may be submitted to the Contracting officer.

## PART I - THE SCHEDULE

### SECTION H - SPECIAL CONTRACT REQUIREMENTS

#### H-1 PERMITS AND CLEARANCES

It shall be the responsibility of the Contractor to determine and secure all necessary permits and clearances for controlled or restricted airspace areas.

The Contractor shall contact the Federal Aviation Administration (FAA) watch supervisor in charge of the Air Traffic Control (ATC) facility to gain approval to operate within controlled airspace. It is suggested that pre-flight coordination be completed at least one week in advance. The FAA suggests that on the day of the flight the photo mission pilot contact the ATC facility and:

- (a) Confirm previous arrangements,
- (b) State that "this is a photo survey mission" via air/ground communications, and subsequently inform the controller when the flight line is commenced.

Military Operation Areas (MOA) will be identified in advance, and if necessary a contact for airspace clearance established. The Contractor is responsible for obtaining flight approvals and security clearances if required by the U.S. Department of Defense. Photographic and digital materials of classified areas shall be stored, handled, and shipped in accordance with existing security regulations. In the event of difficulty, the Contracting Officer shall be contacted for guidance and/or assistance.

#### H-2 AIRCRAFT REGULATIONS AND CERTIFICATIONS

All aircraft used in the performance of the work under this contract shall be maintained and operated in accordance with all regulations required by the U.S. Department of Transportation, Federal Aviation Administration (FAA). Aircraft operated in the acquisition of aerial photography or digital imagery under this contract shall be FAA certified to the highest flying altitude required to obtain proposed imagery.

#### H-3 OWNERSHIP OF CONTRACT MATERIALS

The Government shall receive copyright and ownership to all data delivered under this contract, including but not limited to photographic materials, orthorectified imagery, databases, and paper products, upon formal acceptance. The Contractor may maintain copyright and ownership of all original or derived works which are not required submittals under this contract. The Contractor is encouraged to create, market, and sell derived works not related to or in direct competition with the data delivered under this contract. For example, if this contract requires 2m

orthorectified imagery be delivered to the Government, the Contractor may create 1m imagery from the original product, prior to its submittal to the Government, and resell it to other Government agencies or the general public. However, the Government also maintains the rights to derive additional products from the data delivered under this contract. No public distribution of the original or derived works shall be made prior to acceptance by the Government unless specified in the contract or authorized by the Contracting Officer.

#### H-4 NOTICE TO THE GOVERNMENT OF DELAY

The Contractor shall immediately, upon becoming aware of any difficulties in meeting performance requirements during the photographic season or when difficulties are encountered which may delay deliveries under the contract, notify the Contracting Officer in writing thereof. Such notification shall identify difficulties, the reasons therefore, and the estimated period of anticipated delay.

FAILURE OF THE CONTRACTOR TO GIVE SUCH NOTICE MAY PRECLUDE LATER CONSIDERATION OF ANY CLAIM FOR NON-PERFORMANCE DUE TO WEATHER CONDITIONS OR ANY REQUEST FOR AN EXTENSION OF CONTRACT TIME.

#### H-5 WAGE DETERMINATION

The Wage Determination applicable to any contract resulting from this solicitation is determined by the location of the Contractor's establishment.

Wage Determination number 1995-0222, Revision 15, dated May 30, 2003 will be applicable for Contractors located nationwide. See Section J, Exhibit 7, Wage Determination.

#### H-6 INDUSTRY SMALL BUSINESS STANDARD

The small business industry size standard for the type of services covered by this procurement, under NAICS code 541922, is the average annual receipts of the concern and its affiliates for the preceding three (3) years not in excess of \$6 million.

PART II - CONTRACT CLAUSES

SECTION I - CONTRACT CLAUSES

I-1 STATEMENT OF EQUIVALENT RATES FOR FEDERAL HIRES (MAY 1989) (FAR 52.222-42)

In compliance with the Service Contract Act of 1965, as amended, and the regulations of the Secretary of Labor (29 CFR part 4), this clause identifies the classes of service employees expected to be employed under the contract and states the wages and fringe benefits payable to each if they were employed by the contracting agency subject to the provisions of 5 U.S.C. 5341 or 5332.

THIS STATEMENT IS FOR INFORMATION ONLY.  
IT IS NOT A WAGE DETERMINATION.

<u>Employee Class</u>	<u>Monetary Wage - Fringe Benefits</u>
Aircraft Pilot	\$40,000
Aerial Photographer	\$22,000
Photo Lab Technician	\$22,000

I-2 ORDERING (OCT 1995) (FAR 52.216-18)

(a) Any supplies and services to be furnished under this contract shall be ordered by issuance of delivery orders or task orders by the individuals or activities designated in the Schedule. Such orders may be issued from **January through September** for the base and option periods.

(b) All delivery orders or task orders are subject to the terms and conditions of this contract. In the event of conflict between a delivery order or task order and this contract, the contract shall control.

(c) If mailed, a delivery order or task order is considered "issued" when the Government deposits the order in the mail. Orders may be issued orally, by facsimile, or by electronic commerce methods only if authorized in the Schedule.

I-3 EVALUATION QUANTITIES--INDEFINITE DELIVERY CONTRACT (FEB 1998) (AGAR 452.216-72)

To evaluate offers for award purposes, the Government will apply the offeror's proposed fixed-prices/rates to the estimated quantities included in the solicitation, and will add other direct costs if applicable.

I-4 MINIMUM AND MAXIMUM CONTRACT AMOUNTS (FEB 1988)  
(AGAR 452.216-73)

During the period specified in FAR clause 52.216-18, ORDERING, the Government shall place orders totaling a minimum of \$2,500.00 but not in excess of ***\$10.0 million***.

I-5 ORDER LIMITATIONS (OCT 1995) (FAR 52.216-19)

- (a) Minimum order. When the Government requires supplies or services covered by this contract in an amount of less than \$2,500.00, the Government is not obligated to purchase, nor is the Contractor obligated to furnish, those supplies or services under the contract.
- (b) Maximum order. The Contractor is not obligated to honor -
  - (1) Any order for a single item in excess of ***\$10.0 million***;
  - (2) Any order for a combination of items in excess of ***\$10.0 million***; or
  - (3) A series of orders from the same ordering office within 30 days that together call for quantities exceeding the limitation in paragraph (b)(1) or (2) of this section.
- (c) If this is a requirements contract (i.e., includes the Requirements clause at subsection 52.216-21 of the Federal Acquisition Regulation (FAR), the Government is not required to order a part of any one requirement from the Contractor if that requirement exceeds the maximum-order limitations in paragraph (b) of this section.
- (d) Notwithstanding paragraphs (b) and (c) of this section, the Contractor shall honor any order exceeding the maximum order limitations in paragraph (b), unless that order (or orders) is returned to the ordering office within 15 days after issuance, with written notice stating the Contractor's intent not to ship the item (or items) called for and the reasons. Upon receiving this notice, the Government may acquire the supplies or services from another source.

I-6 INDEFINITE QUANTITY (OCT 1995) (FAR 52.216-22)

- (a) This is an indefinite-quantity contract for the supplies or services specified, and effective for the period stated, in the Schedule. The quantities of supplies and services specified in the Schedule are estimates only and are not purchased by this contract.
- (b) Delivery or performance shall be made only as authorized by orders issued in accordance with the Ordering clause. The Contractor shall furnish to the Government, when and if ordered, the supplies or services specified in the Schedule up to and including the quantity designated in the Schedule as the "maximum." The Government shall order at least the quantity of supplies or services designated in the Schedule as the "minimum."

- (c) Except for any limitations on quantities in the Order Limitations clause or in the Schedule, there is no limit on the number of orders that may be issued. The Government may issue orders requiring delivery to multiple destinations or performance at multiple locations.
- (d) Any order issued during the effective period of the contract and not completed within the period shall be completed by the Contractor within the time specified in the order. The contract shall govern the Contractor's and Government's rights and obligations with respect to that order to the same extent as if the order were completed during the contract's effective period; provided, that the Contractor shall not be required to make any deliveries under this contract after *December 31, 2006*.

I-7 PERFORMANCE-BASED PAYMENTS (FEB 2002) (FAR 52.232-32)

- (a) Amount of payments and limitation on payments. Subject to such other limitations and conditions as are specified in this contract and this clause, the amount of payments and limitations on payments shall be specified in the contract's description of the basis for payment.
- (b) Contractor request for performance-based payments. The Contractor may submit requests for payment of performance-based payments not more frequently than monthly, in a form and manner acceptable to the Contracting Officer. Unless otherwise authorized by the Contracting Officer, all performance-based payments in any period for which payment is being requested shall be included in a single request, appropriately itemized and totaled. The Contractor's request shall contain the information and certification detailed in paragraph (1) and (m) of this clause.
- (c) Approval and payment of requests.
  - (1) The Contractor shall not be entitled to payment of a request for performance-based payment prior to successful accomplishment of the event or performance criterion for which payment is requested has been successfully accomplished in accordance with the terms of the contract. The Contracting Officer may, at any time, require the Contractor to substantiate the successful performance of any event or performance criterion which has been or is represented as being payable.
  - (2) A payment under this performance-based payment clause is a contract financing payment under the Prompt Payment clause of this contract and not subject to the interest penalty provision of the Prompt Payment Act. The designated payment office will pay approved requests on the 30th day after receipt of the request for performance-based payment. However, the designated payment office is not required to provide payment if the contracting Officer requires substantiation as provided in paragraph (c)(1) of this clause, or inquires into the status of an event or performance criterion or into any of the conditions listed in paragraph (e) of

this clause, or into the Contractor certification. The payment period will not begin until the Contracting Officer approves the request.

- (3) The approval by the Contracting Officer of a request for performance-based payment does not constitute an acceptance by the Government and does not excuse the Contractor from performance of obligations under this contract.

(d) Liquidation of performance-based payment.

- (1) Performance-based finance amounts paid prior to payment for delivery of an item shall be liquidated by deducting a percentage or a designated dollar amount from the delivery payment. If the performance-based finance payments are on a delivery item basis, the liquidation amount for each such line item shall be the percent of that delivery item price that was previously paid under performance-based finance payments are on a whole contract basis, liquidation shall be by either predesignated dollar amount. If the performance-based finance payments are on a whole contract basis, liquidation shall be by either predesignated liquidation amounts or a liquidation percentage.
- (2) If at any time the amount of payments under this contract exceeds any limitation in this contract, the Contractor shall repay to the Government the excess. Unless otherwise determined by the Contracting Officer, such excess shall be credited as a reduction on the unliquidated performance-based payment balance(s), after adjustment of invoice payments and balances for any retroactive price adjustments.

(e) Reduction or suspension of performance-based payments. The Contracting Officer may reduce or suspend performance-based payments, liquidate performance-based payments by deduction from any payment under the contract, or take a combination of these actions after finding upon substantial evidence any of the following conditions:

- (1) The Contractor failed to comply with any material requirement of this contract (which includes paragraphs (h) and (i) of this clause).
- (2) Performance of this contract is endangered by the Contractor's:
  - (i) Failure to make progress; or
  - (ii) Unsatisfactory financial condition.
- (3) The Contractor is delinquent in payment of any subcontractor or supplier under this contract in the ordinary course of business.

(f) Title.

- (1) Title to the property described in this paragraph (f) shall vest in the Government. Vestiture shall be immediately upon the date of the first performance-based payment

under this contract, for property acquired or produced before that date. Otherwise, vestiture shall occur when the property is or should have been allocable or properly chargeable to this contract.

(2) "Property," as used in this clause, includes all of the following described items acquired or produced by the Contractor that are or should be allocable or properly chargeable to this contract under sound and generally accepted accounting principles and practices:

- (i) Parts, materials, inventories, and work in process;
- (ii) Special tooling and special test equipment to which the Government is to acquire title under any other clause of this contract;
- (iii) Nondurable (i.e., noncapital) tools, jigs, dies, fixtures, molds, patterns, taps, gauges, test equipment and other similar manufacturing aids, title to which would not be obtained as special tooling under paragraph (f)(2)(ii) of this clause: and
- (iv) Drawings and technical data, to the extent the Contractor or subcontractors are required to deliver them to the Government by other clauses of this contract.

(3) Although title to property is in the Government under this clause, other applicable clauses of this contract (e.g., the termination or special tooling clauses) shall determine the handling and disposition of the property.

(4) The Contractor may sell any scrap resulting from production under this contract, without requesting the Contracting Officer's approval, provided that any significant reduction in the value of the property to which the Government has title under this clause is reported in writing to the Contracting Officer.

(5) In order to acquire for its own use or dispose of property to which title is vested in the Government under this clause, the Contractor must obtain the Contracting Officer's advance approval of the action and the terms. If approved the basis for payment (the events or performance criteria) to which the property is related shall be deemed to be not in compliance with the terms of the contract and not payable (if the property is part of or needed for performance), and the Contractor shall refund the related performance-based payments in accordance with paragraph (d) of this clause.

(6) When the Contractor completes all of the obligations under this contract, including liquidation of all performance-based payments, title shall vest in the Contractor for all property (or the proceeds thereof) not -

- (i) Delivered to, and accepted by, the Government under this contract; or
- (ii) Incorporated in supplies delivered to, and accepted by, the Government under this contract and to which title is vested in the Government under this clause.

- (7) The terms of this contract concerning liability for Government-furnished property shall not apply to property to which the Government acquired title solely under this clause.
- (g) Risk of Loss. Before delivery of and acceptance by the Government, the Contractor shall bear the risk of loss for property, the title to which vests in the Government under this clause, except to the extent the Government expressly assumes the risk. If any property is damaged, lost, stolen, or destroyed, the basis of payment (the events or performance criteria) to which the property is related shall be deemed to be not in compliance with the terms of the contract and not payable (if the property is part of or needed for performance), and the Contractor shall refund the related performance-based payments in accordance with paragraph (d) of this clause.
- (h) Records and controls. The Contractor shall maintain records and controls adequate for administration of this clause. The Contractor shall have no entitlement to performance-based payments during any time the Contractor's records or controls are determined by the Contracting Officer to be inadequate for administration of this clause.
- (i) Reports and Government access. The Contractor shall promptly furnish reports, certificates, financial statements, and other pertinent information requested by the Contracting Officer for the administration of this clause and to determine that an event or other criterion prompting a financing payment has been successfully accomplished. The Contractor shall give the Government reasonable opportunity to examine and verify the Contractor's records and to examine and verify the Contractor's performance of this contract for administration of this clause.
- (j) Special terms regarding default. If this contract is terminated under the Default clause,
- (1) The Contractor shall, on demand, repay to the Government the amount of unliquidated performance-based payments, and
  - (2) Title shall vest in the Contractor, on full liquidation of all performance-based payments, for all property for which the Government elects not to require delivery under the Default clause of this contract. The Government shall be liable for no payment except as provided by the Default clause.
- (k) Reservation of rights.
- (1) No payment or vesting of title under this clause shall -
    - (i) Excuse the Contractor from performance of obligations under this contract;  
or
    - (ii) Constitute a waiver of any of the rights or remedies of the parties under the contract.

- (2) The Government's rights and remedies under this clause -
- (i) Shall not be exclusive, but rather shall be in addition to any other rights and remedies proved by law or this contract; and
  - (ii) Shall not be affected by delayed, partial, or omitted exercise of any right, remedy, power, or privilege, nor shall such exercise under this clause or the exercise of any right, power, or privilege of the Government.
- (l) Content of Contractor's request for performance-based payment. The Contractor's request for performance-based payment shall contain the following:
- (1) The name and address of the Contractor;
  - (2) The date of the request for performance-based payment;
  - (3) The contract number and/or other identifier of the contract or order under which the request is made;
  - (4) Such information and documentation as is required by the contract's description of the basis for payment; and
  - (5) A certification by a Contractor official authorized to bind the Contractor, as specified in paragraph (m) of this clause.
- (m) Content of Contractor's Certification. As required in paragraph (l)(5) of this clause, the Contractor shall make the following certification in each request for performance-based payment:

I certify to the best of my knowledge and belief that -

- (1) This request for performance-based payment is true and correct; this request (and attachments) has been prepared from the books and records of the Contractor, in accordance with the contract and the instructions of the Contracting Officer;
- (2) (Except as reported in writing on \_\_\_\_\_, all payments to subcontractors and suppliers under this contract have been paid, or will be paid, currently, when due in the ordinary course of business;
- (3) There are no encumbrances (except as reported in writing on \_\_\_\_\_ against the property acquired or produced for, and allocated or properly chargeable to, the contract which would affect or impair the Government's title;
- (4) There has been no materially adverse change in the financial condition of the Contractor since the submission by the Contractor to the Government of the most recent written information dated \_\_\_\_\_; and

(5) After the making of this requested performance-based payment, the amount of all payments for each deliverable item for which performance-based payments have been requested will not exceed any limitation in the contract, and the amount of all payments under the contract will not exceed any limitation in the contract.

I-8 WARRANTY OF SUPPLIES OF A NONCOMPLEX NATURE. (JUN 2003)  
(FAR 52.246-17)

As prescribed in 46.710(a)(1), insert a clause substantially as follows:

(a) Definitions. As used in this clause-

"Acceptance" means the act of an authorized representative of the Government by which the Government assumes for itself, or as an agent of another, ownership of existing supplies, or approves specific services as partial or complete performance of the contract.

"Supplies" means the end items furnished by the Contractor and related services required under this contract. The word does not include "data."

(b) Contractor's obligations.

(1) Notwithstanding inspection and acceptance by the Government of supplies furnished under this contract, or any condition of this contract concerning the conclusiveness thereof, the Contractor warrants that until December 31, 2005 -

- (i) All supplies furnished under this contract will be free from defects in material or workmanship and will conform with all requirements of this contract; and
- (ii) The preservation, packaging, packing, and marking, and the preparation for, and method of, shipment of such supplies will conform with the requirements of this contract.

(2) When return, correction, or replacement is required, transportation charges and responsibility for the supplies while in transit shall be borne by the Contractor. However, the Contractor's liability for the transportation charges shall not exceed an amount equal to the cost of transportation by the usual commercial method of shipment between the place of delivery specified in this contract and the Contractor's plant, and return.

(3) Any supplies or parts thereof, corrected or furnished in replacement under this clause, shall also be subject to the terms of this clause to the same extent as supplies initially delivered. The warranty, with respect to supplies or parts thereof, shall be equal in duration to that in paragraph (b)(1) of this clause and shall run from the date of delivery of the corrected or replaced supplies.

(4) All implied warranties of merchantability and "fitness for a particular purpose" are excluded from any obligation contained in this contract.

(c) Remedies available to the Government.

(1) The Contracting Officer shall give written notice to the Contractor of any breach of warranties in paragraph (b)(1) of this clause within 30 days after discovery of the defect.

(2) Within a reasonable time after the notice, the Contracting Officer may either-

- (i) Require, by written notice, the prompt correction or replacement of any supplies or parts thereof (including preservation, packaging, packing, and marking) that do not conform with the requirements of this contract within the meaning of paragraph (b)(1) of this clause; or
- (ii) Retain such supplies and reduce the contract price by an amount equitable under the circumstances.

(3) (i) If the contract provides for inspection of supplies by sampling procedures, conformance of supplies or components subject to warranty action shall be determined by the applicable sampling procedures in the contract. The Contracting Officer-

- (A) May, for sampling purposes, group any supplies delivered under this contract;
- (B) Shall require the size of the sample to be that required by sampling procedures specified in the contract for the quantity of supplies on which warranty action is proposed;
- (C) May project warranty sampling results over supplies in the same shipment or other supplies contained in other shipments even though all of such supplies are not present at the point of reinspection; provided, that the supplies remaining are reasonably representative of the quantity on which warranty action is proposed; and
- (D) Need not use the same lot size as on original inspection or reconstitute the original inspection lots.

(ii) Within a reasonable time after notice of any breach of the warranties specified in paragraph (b)(1) of this clause, the Contracting Officer may exercise one or more of the following options:

- (A) Require an equitable adjustment in the contract price for any group of supplies.
- (B) Screen the supplies grouped for warranty action under this clause at the Contractor's expense and return all nonconforming supplies to the Contractor for correction or replacement.

(C) Require the Contractor to screen the supplies at locations designated by the Government within the contiguous United States and to correct or replace all nonconforming supplies.

(D) Return the supplies grouped for warranty action under this clause to the Contractor (irrespective of the f.o.b. point or the point of acceptance) for screening and correction or replacement.

(4) (i) The Contracting Officer may, by contract or otherwise, correct or replace the nonconforming supplies with similar supplies from another source and charge to the Contractor the cost occasioned to the Government thereby if the Contractor-

(A) Fails to make redelivery of the corrected or replaced supplies within the time established for their return; or

(B) Fails either to accept return of the nonconforming supplies or fails to make progress after their return to correct or replace them so as to endanger performance of the delivery schedule, and in either of these circumstances does not cure such failure within a period of 10 days (or such longer period as the Contracting Officer may authorize in writing) after receipt of notice from the Contracting Officer specifying such failure.

(ii) Instead of correction or replacement by the Government, the Contracting Officer may require an equitable adjustment of the contract price. In addition, if the Contractor fails to furnish timely disposition instructions, the Contracting Officer may dispose of the nonconforming supplies for the Contractor's account in a reasonable manner. The Government is entitled to reimbursement from the Contractor, or from the proceeds of such disposal, for the reasonable expenses of the care and disposition of the nonconforming supplies, as well as for excess costs incurred or to be incurred.

(5) The rights and remedies of the Government provided in this clause are in addition to and do not limit any rights afforded to the Government by any other clause of this contract.

(End of clause)

#### I-9 CLAUSES INCORPORATED BY REFERENCE (FEB 1998) (FAR 52.252-2)

This contract incorporates the following clauses by reference, with the same force and effect as if they were given in full text. Upon request, the Contracting Officer will make their full text available. Also, the full text of a clause may be accessed electronically at this address: [www.arnet.gov/far](http://www.arnet.gov/far).

FEDERAL ACQUISITION REGULATION (48 CFR CHAPTER 1) CLAUSES:

- 52.202-01 Definitions (DEC 2001)
- 52.203-03 Gratuities (APR 1984)
- 52.203-05 Covenant Against Contingent Fees (APR 1984)
- 52.203-06 Restrictions on Subcontractor Sales to the Government (JUL 1995)
- 52.203-07 Anti-Kickback Procedures (JUL 1995)
- 52.203-08 Cancellation, Rescission, and Recovery of Funds for Illegal or Improper Activity (JAN 1997)
- 52.203-10 Price or Fee Adjustment for Illegal or Improper Activity (JAN 1997)
- 52.203-12 Limitation on Payments to Influence Certain Federal Transactions (JUN 2003)
- 52.204-04 Printing/Copying Double-Sided on Recycled Paper (AUG 2000)
- 52.204-07 Central Contractor Registration (OCT 2003)
- 52.209-06 Protecting the Government's Interest When Subcontracting With Contractors Debarred, Suspended, or Proposed for Debarment (JUL 1995)
- 52.211-05 Material Requirements (AUG 2000)
- 52.215-02 Audit and Records - Negotiation (JUN 1999)
- 52.215-08 Order of Precedence - Uniform Contract Format (OCT 1997)
- 52.215-11 Price Reduction for Defective Cost or Pricing Data - Modifications (OCT 1997)
- 52.215-13 Subcontractor Cost or Pricing Data - Modifications (OCT 1997)
- 52.215-14 Integrity of Unit Prices (OCT 1997)
- 52.216-27 Single or Multiple Awards (OCT 1995)
- 52.217-08 Option to Extend Services (NOV 1999)
- 52.217-09 Option to Extend the Term of the Contract (MAR 2000)

- 52.219-04 Notice of Price Evaluation Preference for HUBZone Small Business Concerns (JAN 1999)
- 52.219-08 Utilization of Small Business Concerns (OCT 2000)
- 52.219-09 Small Business Subcontracting Plan (JAN 2002)
- 52.222-03 Convict Labor (JUN 2003)
- 52.222-04 Contract Work Hours and Safety Standards Act - Overtime Compensation (SEP 2000)
- 52.222-21 Prohibition of Segregated Facilities (FEB 1999)
- 52.222-26 Equal Opportunity (APR 2002)
- 52.222-35 Equal Opportunity for Special Disabled Veterans, Veterans of the Vietnam Era, and Other Eligible Veterans (DEC 2001)
- 52.222-36 Affirmative Action for Workers with Disabilities (JUN 1998)
- 52.222-37 Employment Reports on Special Disabled Veterans and Veterans of the Vietnam Era, and Other Eligible Veterans (DEC 2001)
- 52.222-41 Service Contract Act of 1965, as Amended (MAY 1989)
- 52.222-44 Fair Labor Standards Act and Service Contract Act - Price Adjustment (FEB 2002)
- 52.223-06 Drug-Free Workplace (MAY 2001)
- 52.223-14 Toxic Chemical Release Reporting (AUG 2003)
- 52.225-03 Buy American Act - North American Free Trade Agreement - Israeli Trade Act (JAN 2004)
- 52.225-13 Restrictions on Certain Foreign Purchases (DEC 2003)
- 52.227-01 Authorization and Consent (JUL 1995)
- 52.227-03 Patent Indemnity (APR 1984)
- 52.227-14 Rights in Data - General - Alternate I (JUN 1987)
- 52.229-03 Federal, State, and Local Taxes (APR 2003)

- 52.232-01 Payments (APR 1984)
- 52.232-08 Discounts for Prompt Payment (FEB 2002)
- 52.232-09 Limitation on Withholding of Payments (APR 1984)
- 52.232-11 Extras (APR 1984)
- 52.232-17 Interest (JUN 1996)
- 52.232-19 Availability of Funds for the Next Fiscal Year (APR 1984)
- 52.232-23 Assignment of Claims (JAN 1986)
- 52.232-25 Prompt Payment (OCT 2003)
- 52.233-01 Disputes (JUL 2002)
- 52.233-03 Protest After Award (AUG 1996)
- 52.242-02 Production Progress Reports (APR 1991)
- 52.242-13 Bankruptcy (JUL 1995)
- 52.243-01 Changes - Fixed Price - Alternate II (AUG 1987)
- 52.245-04 Government Furnished Property (Short-Form) (JUN 2003)
- 52.246-25 Limitation of Liability - Services (FEB 1997)
- 52.248-01 Value Engineering (FEB 2000)
- 52.249-04 Termination for Convenience of the Government (Services) (Short Form)  
(APR 1984)
- 52.249-08 Default (Fixed-Price Supply and Service) (APR 1984)
- 52.253-01 Computer Generated Forms (JAN 1991)

PART III - LIST OF DOCUMENTS, EXHIBITS, AND OTHER ATTACHMENTS

SECTION J - LIST OF ATTACHMENTS

<u>Exhibit</u>	<u>Description</u>	<u>Page</u>
Exhibit 1	File Naming Convention	52
Exhibit 2	Labeling Requirements (4 pages)	53-56
Exhibit 3	Progress Report (1 page)	57
Exhibit 4	Image Scan Naming Logic (1 page)	58
Exhibit 5	Flight Line Exposure Station Reference System (1 page)	59
Exhibit 6	NAPP Exposure Station Reference System (1 page)	60
Exhibit 7	State Data Table	61
Exhibit 8	Wage Determination (3 Pages)	62-64
Exhibit 9	Glossary and Definitions (1 page)	65
Attachment A:	NAIP Specification for Film Based Acquisition, dated March 31, 2004 (20 pages)	
Attachment B:	NAIP Specification for Digital Sensor Based Acquisition, dated March 31, 2004 (4 pages)	
Attachment C:	State Coverage Maps (43 pages)	
Attachment D:	County Coverage Data (22 pages)	

## EXHIBIT 1

### FILE NAMING CONVENTION

#### Text Data Files:

File Name: <type>\_<solno>\_<item>\_<st>.txt

type - file type (must be “abstract” “process” “project” “photo” or “scan”)

solno - contract solicitation number

item - item number

st - state abbreviation

Example: process\_3-04\_1\_mo.txt  
project\_3-04\_1\_mo.txt

#### Quarter Quadrangle Image Tiles:

File Name: <n>\_<lat><log><quad>\_<loc>\_<xx>\_<r>\_<yyyymmdd>.tif

n – film type/bandwidth designator (o=black & white; n=natural color; or c=color  
IR)

lat - latitude, identified by 2 digit numerical value of a 1° block

log - longitude, identified by 3 digit numerical value of a 1° block (including the  
leading “0” if needed)

quad - quadrangle number, identified by grid number

loc - quadrangle location, identified by grid letters (nw, ne, sw, se)

xx – two digit UTM zone

r - resolution (1=1 meter; 2=2 meter)

yyyymmdd - date of acquisition

Example: c\_3509320\_ne\_15\_1\_20040721.tif

#### Compressed County Mosaics:

File Name: naip\_<x-x>\_<r><n>\_<f>\_<stnnn>\_<yyyy>\_<v>.sid

x-x - disk number and total count (i.e., disk 1 of 2)

r - resolution (1=1 meter; 2=2 meter)

n – film type/bandwidth designator (o=black & white; n=natural color; or c=color  
IR)

f - compression format (s=MrSID®)

stnnn – state and FIPS code


yyyy - year of aerial acquisition

v - version number

Example: naip\_1-1\_1n\_s\_mo137\_2004\_1.sid  
naip\_1-1\_2n\_s\_ca123\_2004\_1.sid

EXHIBIT 2  
Figure 1


COMPRESSED COUNTY MOSAICS  
CD-ROM Labeling Requirements

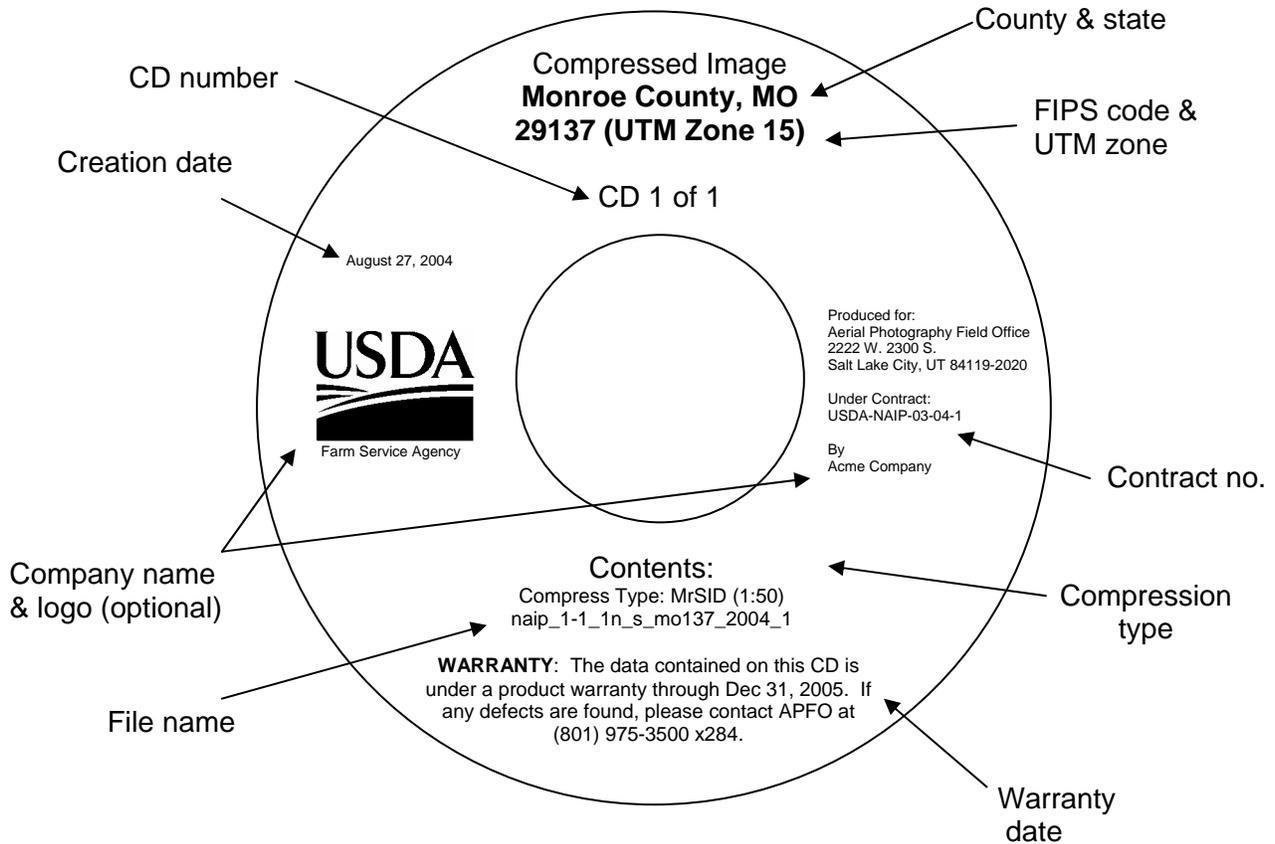

ELEMENT	EXAMPLE
CD Number	CD 1 of 1
Company name & logo	Acme Company
Compression type & ratio	MrSID® (1:50)
Contract number	USDA-NAIP-3-04-1
Country & state	Monroe County, MO
Creation date	August 27, 2004
File name	naip_1-1_1n_s_mo137_2004_1
FIPS code & UTM zone	29137 (UTM Zone 15)
Warranty date	Dec 31, 2005

EXHIBIT 2  
Figure 2


Project Data Files  
CD-ROM Labeling Requirements

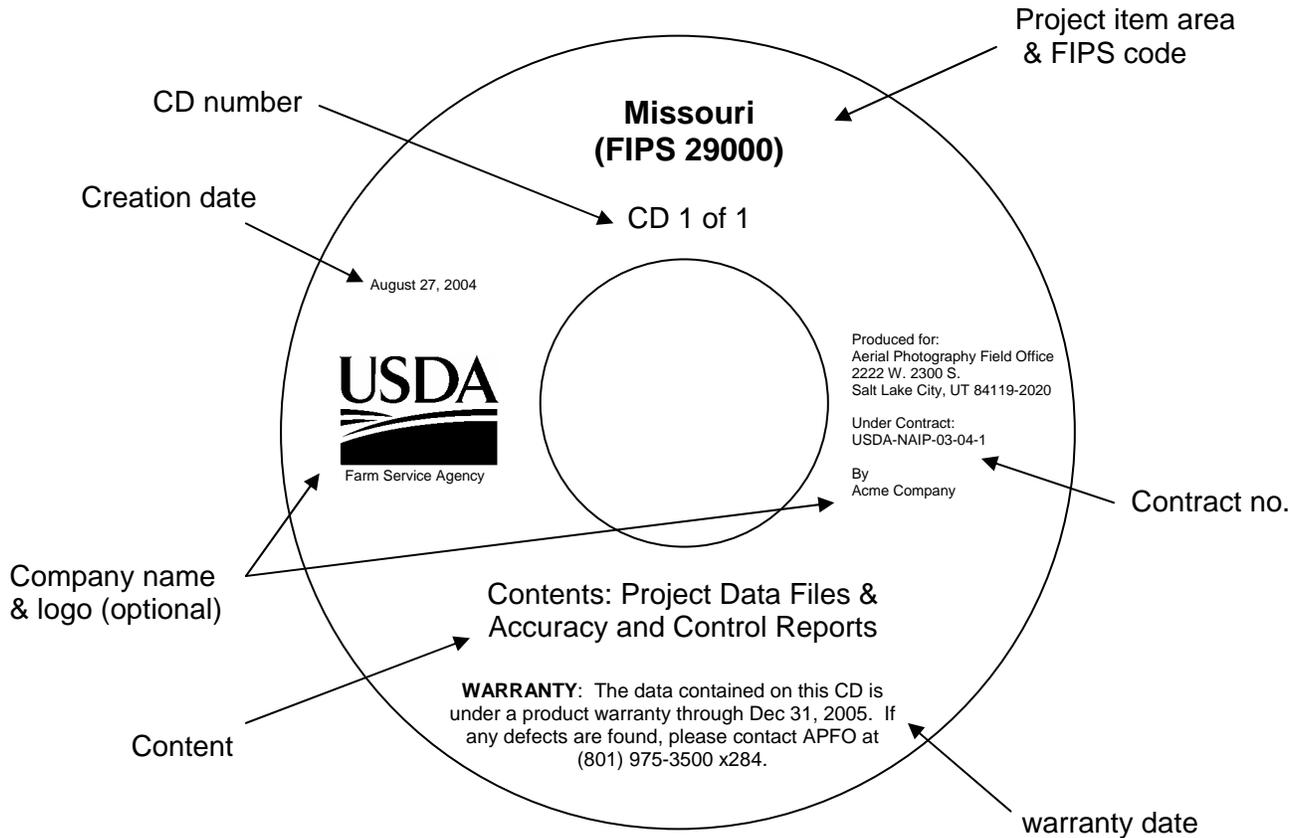

ELEMENT	EXAMPLE
CD Number	CD 1 of 1
Company name & logo	Acme Company
Content	Project Data Files & Accuracy and Control Reports
Contract number	USDA-NAIP-3-04-1
Creation date	August 27, 2004
Project item area & FIPS code	Missouri (FIPS 29000)
Warranty date	Dec 31, 2005

EXHIBIT 2  
Figure 3

QUARTER QUADRANGLE IMAGE TILE  
DLT Tape Cartridge Case Labeling Requirements

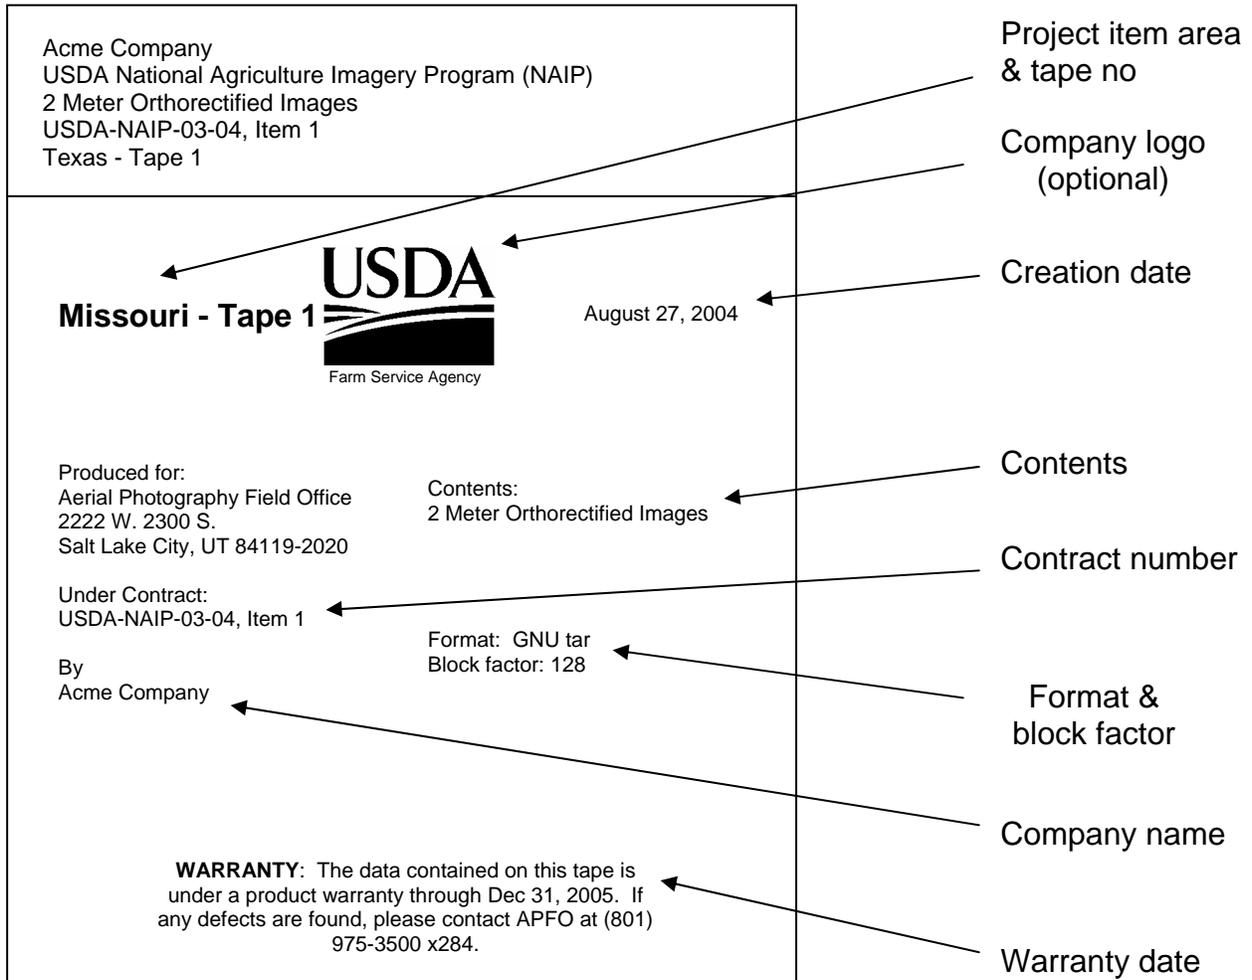


Label dimensions: 4-3/16" (width) x 5-1/8" (height)

Note: Fold line is 1" from the top of the label.

**Figure 3 (con't)**

QUARTER QUADRANGLE IMAGE TILE  
DLT Tape Cartridge Labeling Requirements

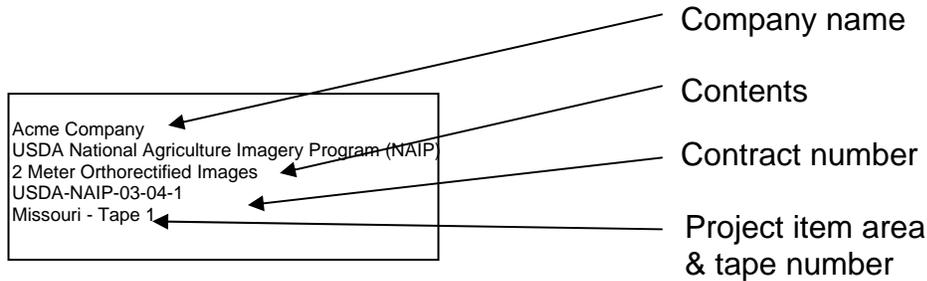

Label dimensions: 2-1/4” (width) x 13/16” (height)

NOTE: Cartridge label must fit securely in tape slot to prevent falling out.

ELEMENT	EXAMPLE
Company name & logo	Acme Company
Contents	2 Meter Orthorectified Images
Contract number	USDA-NAIP-3-04-1
Creation date	August 27, 2004
Format & block factor	Format: tar Block factor: 128
Project item area & tape number	Missouri – Tape 1
Warranty date	Dec 31, 2005

EXHIBIT 3

PROGRESS REPORT CONVENTION

Syntax:

HEADER ITEMS: field-name “.”[field-body][CRFL]  
BODY ITEMS: body item [CRFL]

Header Items:

All four header items are required to be submitted in each and every submittal.

<u>DESCRIPTION</u>	<u>KEYWORD</u>	<u>FORMAT</u>
Contractor Name	CONTRACTOR	Alphanumeric
Contract Award Number	CONTRACT	Numeric (N-YY)
Award Item	ITEM	Numeric (N)
Date Flown	DATE	Date (YYYYMMDD)

Body Items:

All four header items are required to be submitted in each and every submittal.

<u>DESCRIPTION</u>	<u>KEYWORD</u>	<u>FORMAT</u>
Exposure data	N/A	Exposure Station

**Sample:**

```
CONTRACTOR: Acme Photography
CONTRACT: 3-04
ITEM: 1
DATE: 20040827

1101E-0200
1101E-0201
1101E-0202
1101E-0203
```

Notes:

- 1) Text is case insensitive.
- 2) Header fields are not required to occur in any particular order.
- 3) Body items must occur after the headers.
- 4) Each header item must be on a single line (no “folding”)
- 5) Keywords may not contain spaces and must be followed immediately by a colon.
- 6) The header items and body items may be separated by a NULL line (a blank line with a carriage-return/line-feed (CRLF)(ASCII 13 and 10).
- 7) Body items can only contain one data item per line and must be terminated by a carriage-return/line-feed.
- 8) Contract award number must be sent without prefix (i.e., USDA-NAIP-3-04 should be sent as 3-04).
- 9) Date must be transmitted as YYYYMMDD.
- 10) No e-mail attachments.

EXHIBIT 4

IMAGE SCAN NAMING LOGIC

121° 00' 00"  
 49° 00' 00" •

01	02	03	04	05	06	07	08
09	10	11	12	13	14	15	16
17	18	19	20	21	22	23	24
25	26	27	28	29	30	31	32
33	34	35	36	37	38	39	40
41	42	43	44	45	46	47	48
49	50	51	52	53	54	55	56
57	58	59	60	61	62	63	64

• 48° 00' 00"  
 120° 00' 00"

NW	NE
SW	SE

The image ID for this scan would be:  
**4812043\_ne**

Each Block (ie: 43) is a full Quad within the 1 degree grid; it is further subdivided into 4 quarter-quads

Sample: **4812043\_ne**            Where:

Latitude: Identified by 2 digit numerical value of a 1 degree block.

Longitude: Identified by 3 digit numerical value of a 1 degree block, including a leading "0" as needed.

Quadrangle Number: Identified by grid number (01, 02, 03, ... 63, 64) See Exhibit 7.

Quarter Quadrangle Location: Identified by grid letters (nw, ne, sw, se)

EXHIBIT 5

FLIGHT LINE EXPOSURE STATION REFERENCE SYSTEM

		<b>95° 00'</b>									
		<b>96° 00'</b>	<b>95° 45'</b>	<b>95° 30'</b>	<b>95° 15'</b>	<b>95° 00'</b>					
<b>40° 00'</b>		<b>8W / 8E</b>	<b>7W / 7E</b>	<b>6W / 6E</b>	<b>5W / 5E</b>	<b>4W / 4E</b>	<b>3W / 3E</b>	<b>2W / 2E</b>	<b>1W / 1E</b>	<b>40° 00'</b>	
		<b>513</b>									
		512	512	512	512	512	512	512	512		
		511	511	511	511	511	511	511	511		
		510	510	510	510	510	510	510	510		
		509	509	509	509	509	509	509	509		
		508	508	508	508	508	508	508	508		
		507	507	507	507	507	507	507	507		
		506	506	506	506	506	506	506	506		
<b>39° 45'</b>		<b>505</b>	<b>39° 45'</b>								
		504	504	504	504	504	504	504	504		
		503	503	503	503	503	503	503	503		
		502	502	502	502	502	502	502	502		
		501	501	501	501	501	501	501	501		
		500	500	500	500	500	500	500	500		
		499	499	499	499	499	499	499	499		
		498	498	498	498	498	498	498	498		
<b>39° 30'</b>		<b>497</b>	<b>39° 30'</b>								
		496	496	496	496	496	496	496	496		
		495	495	495	495	495	495	495	495		
		494	494	494	494	494	494	494	494		
		493	493	493	493	493	493	493	493		
		492	492	492	492	492	492	492	492		
		491	491	491	491	491	491	491	491		
		490	490	490	490	490	490	490	490		
<b>39° 15'</b>		<b>489</b>	<b>39° 15'</b>								
		488	488	488	488	488	488	488	488		
		487	487	487	487	487	487	487	487		
		486	486	486	486	486	486	486	486		
		485	485	485	485	485	485	485	485		
		484	484	484	484	484	484	484	484		
		483	483	483	483	483	483	483	483		
		482	482	482	482	482	482	482	482		
<b>39° 00'</b>		<b>481</b>	<b>39° 00'</b>								
		<b>8W / 8E</b>	<b>7W / 7E</b>	<b>6W / 6E</b>	<b>5W / 5E</b>	<b>4W / 4E</b>	<b>3W / 3E</b>	<b>2W / 2E</b>	<b>1W / 1E</b>		

**FLIGHT LINE AND EXPOSURE EXAMPLE FOR NORTHEAST CORNER EXPOSURE: 0951E - 0513**

**Flight Line: 095** = Eastern Longitude coordinate of 1 degree x 1 degree area.  
**1** = Number assigned to 7-1/2 minute column within 1 degree x 1 degree area.  
**E** = East flight line within 7-1/2 minute column.

**Exposure Station: 0513** = number assigned by latitude position to each predetermined photo center.

The Flight Line and Exposure Station Reference System was developed for identifying the geographic location of individual photos acquired for the National Aerial Photography Program.

EXHIBIT 6

NAPP EXPOSURE STATION REFERENCE SYSTEM

50° -- 833						
7 -- 829	7 -- 669	7 -- 509	7 -- 349	7 -- 189	7 -- 29	
6 -- 825	6 -- 665	6 -- 505	6 -- 345	6 -- 185	6 -- 25	
5 -- 821	5 -- 661	5 -- 501	5 -- 341	5 -- 181	5 -- 21	
4 -- 817	4 -- 657	4 -- 497	4 -- 337	4 -- 177	4 -- 17	
3 -- 813	3 -- 653	3 -- 493	3 -- 333	3 -- 173	3 -- 13	
2 -- 809	2 -- 649	2 -- 489	2 -- 329	2 -- 169	2 -- 9	
1 -- 805	1 -- 645	1 -- 485	1 -- 325	1 -- 165	1 -- 5	
49° -- 801	44° -- 641	39° -- 481	34° -- 321	29° -- 161	24° -- 1	
7 -- 797	7 -- 637	7 -- 477	7 -- 317	7 -- 157		
6 -- 793	6 -- 633	6 -- 473	6 -- 313	6 -- 153		
5 -- 789	5 -- 629	5 -- 469	5 -- 309	5 -- 149		
4 -- 785	4 -- 625	4 -- 465	4 -- 305	4 -- 145		
3 -- 781	3 -- 621	3 -- 461	3 -- 301	3 -- 141		
2 -- 777	2 -- 617	2 -- 457	2 -- 297	2 -- 137		
1 -- 773	1 -- 613	1 -- 453	1 -- 293	1 -- 133		
48° -- 769	43° -- 609	38° -- 449	33° -- 289	28° -- 129		
7 -- 765	7 -- 605	7 -- 445	7 -- 285	7 -- 125		
6 -- 761	6 -- 601	6 -- 441	6 -- 281	6 -- 121		
5 -- 757	5 -- 597	5 -- 437	5 -- 277	5 -- 117		
4 -- 753	4 -- 593	4 -- 433	4 -- 273	4 -- 113		
3 -- 749	3 -- 589	3 -- 429	3 -- 269	3 -- 109		
2 -- 745	2 -- 585	2 -- 425	2 -- 265	2 -- 105		
1 -- 741	1 -- 581	1 -- 421	1 -- 261	1 -- 101		
47° -- 737	42° -- 577	37° -- 417	32° -- 257	27° -- 97		
7 -- 733	7 -- 573	7 -- 413	7 -- 253	7 -- 93		
6 -- 729	6 -- 569	6 -- 409	6 -- 249	6 -- 89		
5 -- 725	5 -- 565	5 -- 405	5 -- 245	5 -- 85		
4 -- 721	4 -- 561	4 -- 401	4 -- 241	4 -- 81		
3 -- 717	3 -- 557	3 -- 397	3 -- 237	3 -- 77		
2 -- 713	2 -- 553	2 -- 393	2 -- 233	2 -- 73		
1 -- 709	1 -- 549	1 -- 389	1 -- 229	1 -- 69		
46° -- 705	41° -- 545	36° -- 385	31° -- 225	26° -- 65		
7 -- 701	7 -- 541	7 -- 381	7 -- 221	7 -- 61		
6 -- 697	6 -- 537	6 -- 377	6 -- 217	6 -- 57		
5 -- 693	5 -- 533	5 -- 373	5 -- 213	5 -- 53		
4 -- 689	4 -- 529	4 -- 369	4 -- 209	4 -- 49		
3 -- 685	3 -- 525	3 -- 365	3 -- 205	3 -- 45		
2 -- 681	2 -- 521	2 -- 361	2 -- 201	2 -- 41		
1 -- 677	1 -- 517	1 -- 357	1 -- 197	1 -- 37		
45° -- 673	40° -- 513	35° -- 353	30° -- 193	25° -- 33		
						<u>SAMPLE:</u>
						40°
						7 --39° 52½'
						6 --39° 45'
						5 --39° 37½'
						4 --39° 30'
						3 --39° 22½'
						2 --39° 15'
						1 --39° 7½'
						39°


EXHIBIT 7

State Data Table

STATE		NO OF COs	AREA (SQ MI)	LINE MILES*	DOQQs	EXP*	FLIGHT LINES*
ARIZONA	AZ	10	11,679	3,498	737	1,621	147
CALIFORNIA	CA	51	63,928	19,219	4,296	8,907	369
COLORADO	CO	31	51,538	15,364	3,547	7,120	77
IDAHO	ID	44	83,499	28,131	6,522	13,029	112
ILLINOIS	IL	102	56,400	17,829	4,163	8,259	83
INDIANA	IN	35	13,927	4,605	1,084	2,133	64
IOWA	IA	99	56,290	18,113	4,181	8,389	108
KANSAS	KS	105	82,264	24,817	5,693	11,501	105
KENTUCKY	KY	120	40,395	12,624	2,948	5,850	125
LOUISIANA	LA	20	16,006	4,888	1,143	2,264	67
MASSACHUSETTS	MA	14	8,257	3,239	737	1,500	66
MINNESOTA (1 Meter)	MN	N/A	2,925	1,062	234	492	24
MINNESOTA (2 Meter)	MN	87	74,240	25,773	5,889	11,937	291
MISSISSIPPI	MS	82	47,716	13,854	3,200	6,417	65
MISSOURI	MO	115	69,486	21,950	5,043	10,172	117
MONTANA	MT	38	86,639	30,292	6,830	14,030	381
NEBRASKA	NE	93	77,227	25,098	5,873	11,631	140
NEW HAMPSHIRE	NH	10	9,304	3,347	776	1,550	30
NEW YORK	NY	35	29,254	9,817	2,300	4,547	105
NORTH CAROLINA	NC	100	52,586	15,336	3,586	7,069	169
NORTH DAKOTA	ND	53	70,665	24,491	5,675	11,343	121
OHIO	OH	88	41,222	13,219	3,077	6,127	70
OKLAHOMA (WEST)	OK	40	38,804	11,584	2,651	5,365	112
OKLAHOMA (EAST)	OK	37	31,062	9,295	2,152	4,305	50
OREGON	OR	36	72,587	24,589	5,522	11,389	471
PENNSYLVANIA	PA	67	45,333	14,554	3,413	6,741	103
RHODE ISLAND	RI	5	1,214	486	117	225	15
SOUTH CAROLINA	SC	20	13,177	4,223	977	1,956	73
SOUTH DAKOTA	SD	66	75,986	25,842	6,045	11,976	128
TENNESSEE	TN	22	11,425	3,945	931	1,826	91
TEXAS (South)	TX	20	24,276	6,605	1,555	3,059	65
TEXAS (Central)	TX	50	52,935	14,734	3,433	6,824	135
TEXAS (Northeast)	TX	81	66,764	19,125	4,443	8,858	106
TEXAS (Northwest)	TX	103	124,501	35,295	8,133	16,302	144
UTAH	UT	29	37,480	12,136	2,649	5,621	353
VERMONT	VT	14	9,609	3,517	825	1,629	34
VIRGINIA (1 Meter)	VA	N/A	5,787	1,831	400	848	48
VIRGINIA (2 Meter)	VA	72	26,322	8,999	2,114	4,168	167
WASHINGTON	WA	36	40,670	14,665	3,252	6,792	331
WISCONSIN	WI	34	27,016	9,666	2,259	4,477	139
WYOMING	WY	8	15,298	5,296	1,146	2,453	164

\* These columns are for frame-based acquisition (both aerial photography and direct-digital capture) and are provided for reference only

REGISTER OF WAGE DETERMINATIONS UNDER  
THE SERVICE CONTRACT ACT  
By direction of the Secretary of Labor



William W. Gross  
Director

Division of  
Wage Determinations

U.S. DEPARTMENT OF LABOR  
EMPLOYMENT STANDARDS ADMINISTRATION  
WAGE AND HOUR DIVISION  
WASHINGTON, D.C. 20210

Wage Determination No.: 1995-0222  
Revision No.: 15  
Date of Last Revision: 05/30/2003

Nationwide: Applicable in the continental U.S. Alaska, Puerto Rico, Hawaii and Virgin Islands.

**\*\* Fringe Benefits Required Follow the Occupational Listing \*\***

Employed on U.S. Government contracts for aerial photographer, aerial seeding, aerial spraying, transportation of personnel and cargo, fire reconnaissance, administrative flying, fire detection, air taxi mail service, and other flying services.

CODE	OCCUPATION TITLE	MINIMUM WAGE RATE
	Aerial Photographer	10.70
	First Officer (Co-Pilot)	19.52
31010	Airplane Pilot	21.45

EXCEPT SCHEDULED AIRLINE TRANSPORTATION AND LARGE MULTI-ENGINE AIRCRAFT SUCH AS THE B-727, DC-8, AND THE DC-9.

**ALL OCCUPATIONS LISTED ABOVE RECEIVE THE FOLLOWING BENEFITS:**

**HEALTH & WELFARE:** \$2.36 an hour or \$94.40 a week or \$409.07 a month

**VACATION:** 2 weeks paid vacation after 1 year of service with a contractor or successor; 3 weeks after 5 years, and 4 weeks after 15 years. Length of service includes the whole span of continuous service with the present contractor or successor, wherever employed, and with the predecessor contractors in the performance of similar work at the same Federal facility. (Reg. 29 CFR 4.173)

**HOLIDAYS:** A minimum of ten paid holidays per year: New Year's Day, Martin Luther King Jr.'s Birthday, Washington's Birthday, Memorial Day, Independence Day, Labor Day, Columbus Day, Veterans' Day, Thanksgiving Day, and Christmas Day. (A contractor may substitute for any of the named holidays another day off with pay in accordance with a plan communicated to the employees involved.) (See 29 CFR 4.174)

**VACATION (Hawaii):** 2 weeks paid vacation after 1 year of service with a contractor or successor; 3 weeks after 10 years, and 4 weeks after 15 years. Length of service includes the whole span of continuous service with the present contractor or successor, wherever employed, and with the predecessor contractors in the performance of similar work at the same Federal facility. (Reg. 29 CFR 4.173)

**HEALTH & WELFARE (Hawaii):** \$0.99 an hour for all employees on whose behalf the contractor provides health care benefits pursuant to the Hawaii prepaid Health Care Act. For those employees who are not receiving health care benefits mandated by the Hawaii prepaid Health Care Act, the new health and welfare benefit rate will be \$2.36. For information regarding the Hawaii prepaid Health Care Act, please contact the Hawaii Employers Council.

**HAZARDOUS PAY DIFFERENTIAL:** An 8 percent differential is applicable to employees employed in a position that represents a high degree of hazard when working with or in close proximity to ordinance, explosives, and incendiary materials. This includes work such as screening, blending, dying, mixing, and pressing of sensitive ordnance, explosives, and pyrotechnic compositions such as lead azide, black powder

and photoflash powder. All dry-house activities involving propellants or explosives. Demilitarization, modification, renovation, demolition, and maintenance operations on sensitive ordnance, explosives and incendiary materials. All operations involving regrading and cleaning of artillery ranges.

A 4 percent differential is applicable to employees employed in a position that represents a low degree of hazard when working with, or in close proximity to ordnance, (or employees possibly adjacent to) explosives and incendiary materials which involves potential injury such as laceration of hands, face, or arms of the employee engaged in the operation, irritation of the skin, minor burns and the like; minimal damage to immediate or adjacent work area or equipment being used. All operations involving, unloading, storage, and hauling of ordnance, explosive, and incendiary ordnance material other than small arms ammunition. These differentials are only applicable to work that has been specifically designated by the agency for ordnance, explosives, and incendiary material differential pay.

**\*\* UNIFORM ALLOWANCE \*\***

If employees are required to wear uniforms in the performance of this contract (either by the terms of the Government contract, by the employer, by the state or local law, etc.), the cost of furnishing such uniforms and maintaining (by laundering or dry cleaning) such uniforms is an expense that may not be borne by an employee where such cost reduces the hourly rate below that required by the wage determination. The Department of Labor will accept payment in accordance with the following standards as compliance:

The contractor or subcontractor is required to furnish all employees with an adequate number of uniforms without cost or to reimburse employees for the actual cost of the uniforms. In addition, where uniform cleaning and maintenance is made the responsibility of the employee, all contractors and subcontractors subject to this wage determination shall (in the absence of a bona fide collective bargaining agreement providing for a different amount, or the furnishing of contrary affirmative proof as to the actual cost), reimburse all employees for such cleaning and maintenance at a rate of \$3.35 per week (or \$.67 cents per day). However, in those instances where the uniforms furnished are made of "wash and wear" materials, may be routinely washed and dried with other personal garments, and do not require any special treatment such as dry cleaning, daily washing, or commercial laundering in order to meet the cleanliness or appearance standards set by the terms of the Government contract, by the contractor, by law, or by the nature of the work, there is no requirement that employees be reimbursed for uniform maintenance costs.

**\*\* NOTES APPLYING TO THIS WAGE DETERMINATION \*\***

Source of Occupational Title and Descriptions:

The duties of employees under job titles listed are those described in the "Service Contract Act Directory of Occupations," Fourth Edition, January 1993, as amended by the Third Supplement, dated March 1997, unless otherwise indicated. This publication may be obtained from the Superintendent of Documents, at 202-783-3238, or by writing to the Superintendent of Documents, U.S. Government Printing Office, Washington, D.C. 20402. Copies of specific job descriptions may also be obtained from the appropriate contracting officer.

REQUEST FOR AUTHORIZATION OF ADDITIONAL CLASSIFICATION AND WAGE RATE {Standard Form 1444 (SF 1444)}

Conformance Process:

The contracting officer shall require that any class of service employee which is not listed herein and which is to be employed under the contract (i.e., the work to be performed is not performed by any classification listed in the wage determination), be classified by the contractor so as to provide a reasonable relationship (i.e., appropriate level of skill comparison) between such unlisted classifications and the classifications listed in the wage determination. Such conformed classes of employees shall be paid the monetary wages and furnished the fringe benefits as are determined. Such conforming process shall be initiated by the contractor prior to the performance of contract work by such unlisted class(es) of employees. The conformed classification, wage rate, and/or fringe benefits shall be retroactive to the commencement date of the contract. {See Section 4.6 (C)(vi)} When multiple wage determinations are included in a contract, a separate SF 1444 should be prepared for each wage determination to which a class(es) is to be conformed.

The process for preparing a conformance request is as follows:

- 1) When preparing the bid, the contractor identifies the need for a conformed occupation(s) and computes a proposed rate(s).
- 2) After contract award, the contractor prepares a written report listing in order proposed classification title(s), a Federal grade equivalency (FGE) for each proposed classification(s), job description(s), and rationale for proposed wage rate(s), including information regarding the agreement or disagreement of the authorized representative of the employees involved, or where there is no authorized representative, the employees themselves. This report should be submitted to the contracting officer no later than 30 days after such unlisted class(es) of employees performs any contract work.
- 3) The contracting officer reviews the proposed action and promptly submits a report of the action, together with the agency's recommendations and pertinent information including the position of the contractor and the employees, to the Wage and Hour Division, Employment Standards Administration, U.S. Department of Labor, for review. (See section 4.6(b)(2) of Regulations 29 CFR Part 4).
- 4) Within 30 days of receipt, the Wage and Hour Division approves, modifies, or disapproves the action via transmittal to the agency contracting officer, or notifies the contracting officer that additional time will be required to process the request.
- 5) The contracting officer transmits the Wage and Hour decision to the contractor.
- 6) The contractor informs the affected employees.

Information required by the Regulations must be submitted on SF 1444 or bond paper.

When preparing a conformance request, the "Service Contract Act Directory of Occupations" (the Directory) should be used to compare job definitions to insure that duties requested are not performed by a classification already listed in the wage determination. Remember, it is not the job title, but the required tasks that determine whether a class is included in an established wage determination. Conformances may not be used to artificially split, combine, or subdivide classifications listed in the wage determination.

**\*\* OCCUPATIONS NOT INCLUDED IN THE SCA DIRECTORY OF OCCUPATIONS \*\***

### **Aerial Photographer**

The aerial photographer must be skilled in reading flight maps, capable of assisting the pilot to adhere to flight lines, be able to level and operate a cartographic camera and its auxiliary equipment mounted in the aircraft so that the photographs that are taken will have the required forward lap and side lap for use in photogrammetric mapping equipment, and possess a working knowledge of aerial films and camera filters to insure proper exposure of the films.

### **First Officer (Co-Pilot)**

Is second in command of commercial airplane and its crew while transporting passengers, mail, or other cargo on scheduled or nonscheduled flights. Assists or relieves an airline captain in operating the controls of an airplane; monitoring flight and engine instruments; and maintaining air-to-ground communications.

## EXHIBIT 9

### GLOSSARY AND DEFINITIONS

Acquisition Period: The calendar period in which the project item area imagery is required to be acquired.

Aerial Photography: Traditional film based, vertical, high resolution imagery.

Camera System: The combination of lens, cone, magazine(s), and camera filter(s) which have been calibrated as an integral unit.

Contract Award Item: A separately awarded contract that may contain one or more project item areas awarded to a single contractor. Contract award items are indicated by the numeric solicitation number followed by sequential award item numbers (i.e., 3-04-1, 3-04-2, 3-04-3, etc).

Contracting Officer's Technical Representative (COTR): A person contract who has the responsibility of providing technical information such as site ground and weather conditions on a contract.

Contracting Officer's Representative (COR): A person who is responsible for specific technical and administrative duties related to a contract.

Direct Digital Imagery: Vertical, high resolution imagery directly captured using a digital sensor. Either airborne or space-borne systems.

Exposure Stations: Pre-determined locations where photo centers of individual frames are to be exposed.

Film Titling: Information annotated on the original aerial film pertaining to project item area and exposure identification.

Ground Sample Distance: The ground sample distance is the distance on the ground represented by each pixel in the x and y components.

Original Photography: All aerial photography, as secured by the Contractor, prior to its inspection by the USDA, including any reflights made at the discretion of the Contractor.

Project Item Area: An area or areas described in the Schedule for which an award shall be made to one offeror.

Quarter Quadrangle: A full quadrangle is defined as a 7½ by 7½ minute area as established for the USGS topographic mapping series. A quarter quadrangle is one-fourth the size and is 3 minutes 45 seconds by 3 minutes 45 seconds.

Reflight Photography: Photography reflown to replace original photography rejected by USDA.

Remake Materials: Any contract materials, other than the original aerial film, ordered remade by USDA.

Stereomodel: The area covered by the conjugate images of three successive overlapping exposures.

## ATTACHMENT A

### NATIONAL AGRICULTURE IMAGERY PROGRAM (NAIP) SPECIFICATION FOR FILM BASED ACQUISITION

(Dated March 31, 2004)

#### 1.0 USDA AERIAL CAMERA SPECIFICATION

Tested and calibrated aerial cameras for taking aerial photographs are required. Camera systems must be compatible with precision stereoscopic mapping instruments and with analytical mensuration procedures used in photogrammetric surveys and in preparing accurate orthophotography. Only camera systems which meet the requirements of these specifications, as determined by a current USGS "Report of Calibration" test report, shall be used

#### 1.1 Aerial Camera and Filter

- (a) Required Camera Lens Focal Length: 6 Inch (153mm) with Antivignetting filter for color positive film, and an Antivignetting and Kodak Wratten No. 12 (minus blue), or equal filter for color infrared positive film.
- (b) Camera systems must be compatible with precision stereoscopic mapping instruments and with analytical mensuration procedures used in photogrammetric surveys and in preparing accurate topographic maps.
- (c) Proposed camera systems will be evaluated to determine if they meet the contract specifications, based on a current USGS camera calibration test report. The Contracting Officer shall have the right to require the removal of a camera from use when deficiencies in photographic imagery attributable to the camera are found to exist. Any camera removed from use by the Contracting Officer shall not be returned to use on USDA projects until the cause of the malfunction is corrected to the satisfaction of USDA. That determination will be based on acceptable samples and/or an additional test by the Optical Science Laboratory of the USGS, if directed by the Contracting Officer.

#### 1.2 Camera Operation

The camera and its mount shall be checked for proper installation prior to each mission. Particular attention shall be given to electrical circuits which control fiducial and camera data box lights and to the vacuum supply. In conformance with conventional photogrammetric practice, it is the preference of the Government that the contractor use camera configurations, that when installed in the aircraft, advances film parallel to the line of flight.

### 1.3 Camera Accessories

- (a) Automatic Exposure Control. An automatic exposure control device is permitted, but a manual override capability is required for some types of terrain to achieve proper exposure.
- (b) Camera Mount. The camera mount shall be regularly serviced and maintained and shall be insulated against aircraft vibration.
- (c) Camera Port Glass. Aircraft camera port glass shall be preferably 50mm thick but not less than 32mm thick. The surface finish shall be 80/50 or better. Glass material shall be polished crown, group category M, Mil Specs Mil-W-1366F (ASG), dated October 1975, C-1 optical quality or better.

### 1.4 Camera System "Report of Calibration"

One copy of the "Report of Calibration" from the U.S. Geological Survey, for any camera system to be used, is required to be either on file at the USDA, or submitted with the contractor's offer. A camera system "Report of Calibration" will not be acceptable if more than three (3) years old at the scheduled date for receipt of offers.

### 1.5 Calibration Tests

Tests to determine compliance with these specifications will be performed by the Optical Science Laboratory of the U.S. Geological Survey. The fee for the tests and the arrangements to have the tests performed are the responsibility of the contractor. Delays encountered in having camera systems tested by the USGS Optical Science Laboratory will not be considered reason for the USDA to accept offers lacking such reports. Each camera system submitted for calibration shall be accompanied by all magazines and filters that might be used with the camera. Controls and camera mounts should not be submitted unless requested by the calibrating laboratory. Instructions for operation of the camera, including directions for holding the shutter open for laboratory tests, shall accompany each camera unless ascertained to be on file with the calibrating laboratory.

#### (a) Interval Between Tests

The interval between tests for camera system calibrations shall not exceed three (3) years, unless otherwise approved by the Contracting Officer. However, when there is any reason to believe that the dimensional relationship of the lens, fiducial marks, and film plane have been disturbed by partial disassembly or unusual mechanical shock, the camera must be submitted for recalibration at contractor expense.

(b) Contact for Calibration Tests

U.S. Geological Survey  
National Mapping Division  
560 National Center  
Reston, Virginia 20192  
Attention: Chief, Optical Science Laboratory  
Phone: (703) 648-4692

(c) Shipping Address for Calibration Tests

U.S. Geological Survey  
12201 Sunrise Valley Drive  
Reston, Virginia 20192  
Attention: Frank MacCue (703) 648-4692

1.6 Constructional Design Necessary to Permit Testing

To permit testing for determination of calibrated focal length, distortion, resolving power, fiducial mark locations, and stereo model flatness, the constructional design of the camera shall be as follows:

(a) Focal Plane

The focal plane shall be accessible from the rear so that a telescope placed behind the camera may view objects in front of the lens, limited only by the size of the focal plane opening. It shall be possible to place the surface of an optical flat having a thickness of 31mm (1¼ in.) on the focal plane of the camera.

(b) Focal Plane Frame

The focal plane frame shall be so constructed as to permit placement of a glass photographic plate on its surface so that the emulsion surface of the glass photographic plate lies in the true focal plane of the camera. The size of the frame image shall be 23 x 23 cm (9 x 9 inches).

1.7 Camera Components Required for Testing(a) Lens Cone Assembly

The lens cone assembly must be so constructed that the lens and fiducial marks comprise an integral unit. The design of the lens cone shall be such that it maintains the required precise relationship between the lens, fiducial marks, and focal plane on which the film platen shall be positioned. Construction shall be such as to maintain the dimensional relationship of these components

under normal conditions of transportation, handling, and use, which can include considerable mechanical and thermal shock. The structure holding these components shall be supported in use in such a manner that stresses likely to change the required dimensional relationships cannot be transmitted to it from the supporting body or mount. The lens cone assembly shall be so designed and manufactured that all parts will return precisely to their original positions, should it be necessary for any reason to disassemble it. However, any disassembly of the lens cone assembly shall require recalibration at contractor's expense before further use.

(b) Film Platen

Cameras shall be equipped with an approved means of flattening the film at the instant of exposure. The platen against which the film is held shall not depart by more than  $\pm 0.013\text{mm}$  from a true plane, when the camera/magazine vacuum is applied.

(c) Shutter

The camera shall be equipped with a between-the-lens shutter of the variable-speed type. The range of speed settings shall be such that, for all anticipated combinations of flight heights, aircraft speeds, film speeds, and light conditions, the camera will produce high-resolution photographs. The effective exposure time and efficiency of the shutter as mounted in the camera will be measured at a maximum aperture and shall have a minimum efficiency of 70 percent at a speed of 1/200 second. This test shall be made in accordance with the "American National Standard Shutter Tests for Still-Picture Cameras," Method I, approved January 12, 1972, American national Standards Institute (PH3.48-1972) (R1978). The shutter shall have a speed of 1/400 second and slower for exposing film negatives during calibration.

(d) Fiducial Marks

Either four or eight fiducial marks are required. If the four fiducial marks are in the corners of the format area, there must be a set of marks (V-notches or equivalent) in the frame at the midsides for use in centering diapositives in a stereoplotter. If there are eight fiducial marks, the corner fiducial marks shall form a quadrilateral whose sides are equal within  $\pm 0.500\text{mm}$ . The midside fiducial marks shall be equidistant within  $\pm 0.500\text{mm}$  from the adjacent corner fiducial marks. All fiducial marks and other marks intended for precise measuring shall be clear and well-defined on the aerial film and shall be of such a form and contrast that the standard deviation of repeated reading of the coordinates of each made on a precision comparator shall not exceed 0.002mm. For cameras with projection type fiducial marks the projected images of all marks must be in sharp focus on the emulsion surface. Drawings in Figure 2 show acceptable fiducial marks and their arrangements. Fiducials

without a center point mark or intersecting lines will not be acceptable. Glass or plastic mounts for fiducial marks will not be acceptable.

- (1) The lines joining opposite pairs of fiducial markers shall intersect at an angle within one minute of 90 degrees. (See Figure 3)
- (2) The intersection of lines between fiducials--the indicated principal point--shall not be further than 0.030mm from the point of autocollimation. (See Figure 3)

(e) Filter

Only glass filters with metallic antivignetting coating shall be used to reduce the illumination for uniform distribution of light over the focal plane format. A microdensitometer trace will be made from the antivignetting coating side of the filter to determine if any deterioration is present that would affect the uniformity of illumination in the focal plane. Deteriorations in excess of 50% of the height of the nominal curve for a lease type will be reason for rejection of a filter. The surface with the antivignetting coating shall be toward the camera lens. The filter shall have surfaces parallel within 10 seconds of arc, and its optical quality shall be such that its addition to the camera shall enhance the uniformity of focal plane illumination and not cause a reduction in image resolution. Glass filter combinations which may be required will be specified in the contract.

1.8 Lens and Platen/Magazine Identification

The camera or lens number, and the most recent calibrated focal length shall be recorded clearly on the film for each frame either on the inside of the focal plane frame or on a data strip between frames. An alpha numeric mark (or symbol) contained in the platen/magazine which identifies the platen/magazine may also be recorded if available on each frame of film. Data markers located on the inside of the focal plane frame shall not exceed 6.35 mm (0.25 inch) in height and 25.4 mm (1.0 inch) in length and shall not obscure any part of the fiducial marks.

1.9 Optical Requirements

Cameras will be given both a static and an operational type test made after final assembly of all parts of the camera system with the light filter in place on the lens. All tests of the lens cone assembly for determination of the calibration constants, calibrated focal length, distortion and resolution will be made using high contrast targets and Eastman Kodak Spectroscopic emulsion Type 157-01 on Kodak Aerial Calibration Plates. Cameras will be operationally tested for stereo model flatness and resolution by exposing Eastman Kodak Double-X Aerographic film 2405 in the camera while mounted on a multicollimator camera calibrator. (The optical requirements for distortion, model flatness, and resolution for various focal length

cameras are defined and tabulated in Table 1.) The camera focal length stated in the contract must meet the minimum requirements for that focal length as shown in Table 1.

(a) Distortion

- (1) Radial. The distortion in image position as measured along radial lines from the principal point of symmetry. The value of the average radial distortion referred to the calibrated focal length shall not exceed the amount shown in Table 1.
- (2) Decentering. The distortion in image position as measured perpendicular to radial lines from the principal point of symmetry. The value of the decentering distortion shall not exceed the amount shown in table 1. This value shall be evaluated for 153 mm cameras only.

(b) Point of Symmetry

The calibrated principal point — the point of symmetry — shall not be further than 0.020 mm from the point of autocollimation for 153 mm focal length lenses and no further than 0.040 mm for all other focal length lenses. (See Figure 3/Table 1)

(c) Resolution

Radial and tangential resolving power, in line pairs per millimeter, shall be no less than the value listed in table 1 for each focal length lens.

(d) Test Aperture

All camera-lens calibration tests shall be made at the maximum aperture specified by the manufacturer for that lens.

(e) Model Flatness

The model flatness test will be performed only for 153 mm and 88 mm cameras. Diapositives will be printed from two film exposures of the collimator targets on micro flat glass plates. Two stereo models will be analytically formed from these using different halves of the exposures for each model. Each model thus formed will consist of a small fixed number of symmetrically arranged points. The allowable deviation from flatness, taken as the range between the maximum negative and the maximum positive value shall be no greater than  $\pm 1/8000$  of the focal length of a nominal 6 inch (153mm) camera, or  $\pm 1/5000$  of the focal length of a nominal 3½ inch (85-88 mm) camera. If elevation discrepancies exceed this value, the camera will not be acceptable. (See Table 1.)

## 2.0 AERIAL FILM

All aerial film used on a project item shall be from one manufacturer and purchased by the Contractor. Extreme care shall be exercised to insure proper exposure and processing of film in accordance with manufacturer's recommendations.

### 2.1 Approved Aerial Film:

- (a) Color Positive Film: Kodak Aerochrome III MS Film 2427, Agfa Aviphot Chrome 200 PE1, or equal.
- (b) Color Infrared Positive Film: Kodak SO-734 Aerochrome III Infrared NP, or equal.

### 2.2 Salient Film Characteristics

- (a) Only very fine grained, unexpired, polyester base films shall be used. The film base shall have a nominal thickness of 4 mils and be 24.1cm (9.5in.) wide. The color and color infrared positives shall be of such quality to produce sharp, color images that provide maximum image detail.
- (b) The natural color positive film will have a diffuse rms granularity value of 13 or lower (read at a net green diffuse density of 1.0 with a 48-micron aperture). Color emulsions shall be balanced for daylight exposure and the spectral sensitivity will cover the entire visible spectrum to 700 nanometers or greater.
- (c) The color infrared positive film will have a diffuse rms granularity value of 23 or lower (read at a net diffuse density of 1.0 with a 48-micron aperture). Color infrared emulsions will be sensitive to ultraviolet, visible, and infrared radiation to 900 nanometers or greater.

### 2.3 Processing

All aerial film shall be processed under controlled sensitometric conditions, to achieve consistent and even development. All film shall be exposed and processed to the manufacturer's specifications. Modified or non-standard processing is not permitted. Prior to processing, a 21-step sensitometric wedge (in 0.15 density increments) shall be exposed on one end of each roll of film and shall remain in the roll when delivered to USDA. A leader of at least one (1) meter (3 feet) shall be retained on each end of the roll.

### 2.4 Film Densities

Density measurements will be taken on transparencies using a transmission densitometer with a 1mm aperture for scales smaller than 1:36,000. Readings will be made no closer than 38mm (1.50 inches) from the image edge.

All film for each project item shall be from the same emulsion batch. All pertinent exposure information shall be supplied to the processing laboratory. The film shall be processed as soon as possible after exposure to avoid undesirable changes in the latent image.

(a) Color Positive Film

All minimum (D-min) and maximum (D-max) densities as measured on the original aerial film transparencies using status A filters shall be no lower nor higher than the values provided below. All density values include the Base + Stain value.

Filter	Base + DMin ( $\pm 0.10$ )	Base + DMax ( $\pm 0.10$ )
Visual	0.73	1.57
Red	0.70	1.57
Green	0.75	1.47
Blue	0.94	1.62

(b) Color Infrared Positive Film

All minimum (D-min) and maximum (D-max) densities as measured on the original aerial film positives using status A filters shall be no lower nor higher than the values provided below. All density values include the Base + Stain value.

Filter	Base + DMin ( $\pm 0.10$ )	Base + DMax ( $\pm 0.10$ )
Visual	0.60	2.32
Red	0.61	2.26
Green	0.57	2.31
Blue	0.48	2.23

2.5 Storage and Handling

(a) Aerial Film

Storage, exposure, and handling of all photographic materials shall be in accordance with the manufacturer's recommendation. The film shall be placed on spools with the emulsion facing the core of the spool and shall not be rolled tightly or in any way stretched, buckled, distorted, or exposed to excessive heat. The processed film shall be free from handprints, fingerprints, smudges, and other handling marks.

If there are no manufacturer's recommended procedures, the contractor shall:

- (1) Film shall be kept refrigerated in a waterproof container until one day before being exposed and returned to cold storage after exposure until processed.
- (2) Cold storage temperature shall not be higher than 55 degrees Fahrenheit (13 degrees Celsius). The film shall be processed as quickly as possible after exposure.

(b) Film Containers

All rolls of aerial film shall be contained in Contractor furnished sturdy, cylindrical plastic cans.

(c) Film Can Labels

Film can labels shall be securely affixed to the side of each can and positioned so that the label can be read when the film can is standing with the lid end up (see Figure 1). The Contractor shall type or neatly letter each film can label with the required information according to the format example. Blank labels will be available from the Government.

2.6 Dimensional Stability

The dimensional change in any direction across a 23cm (9 inch) distance shall not exceed 0.13mm (0.005 inch) at 18-24o Celsius (65-75o Fahrenheit) and 45-55% relative humidity.

2.7 Physical Quality

All aerial film shall be free from chemicals, stains, tears, scratches, abrasions, water marks, finger marks, lint, dirt, and other physical defects. The imagery shall be clear and sharp in detail and uniform in density. It shall be free from light streaks, static marks, and other defects that would interfere with the intended purpose. All film shall be thoroughly fixed and washed to insure freedom from chemicals and shall be of archival quality. Film or prints found to contain an excess of residual chemicals, by testing in accordance with manufacturer's procedures, may be rejected or returned to the Contractor for refixing and rewashing. The use of any adhesive tape product, such as masking tape, which leaves residual adhesive on the film is prohibited.

2.8 Composition of Film Roll

**More than one project item area from a single contract award item** may be placed on a single roll. All aerial film on any one roll shall have the same roll

number and shall consist only of exposures made with the same camera system (lens, cone, and magazine). Every exposure within a roll of film shall be titled regardless if it is rejected or unused for coverage.

One (1) meter (3 feet) of blank or unused film shall be left beyond the first and last used exposure on each roll or segment to serve as leader and trailer. Some unexposed film must be retained at the beginning or end of a roll for the step wedge which is required for controlled processing.

Film spools having a flange diameter of approximately 13.2cm (5-3/16 inches) shall be used, and only that length of film which can be wound on a spool without strain, leaving at least 3.2mm (1/8 inch) of flange exposed, shall be placed on each spool.

For Color Infrared Film ONLY. A minimum of four (4) run-off exposures shall be made before the first usable exposure on a mission and at the beginning of each new roll. A minimum of four run-off exposures between usable exposures is required if mission is interrupted by more than 30 minutes and/or if splicing is necessary.

2.9 Splicing Film

Splicing shall be accomplished with 19mm (¾ inch) pressure sensitive polyester base tape. The splices shall be of the butt-joint type with tape placed on both sides of the splice. Particular care shall be given to the alignment of the film when splicing, with care taken to trim all excess binding tape in order that the film will be perfectly straight after splicing. A splice shall not be closer than 13cm (5 inches) from the image edge of any accepted frame.

3.0 TITLING OF AERIAL FILM

Every exposure within a roll shall be titled regardless if acceptable or unacceptable, used or unused, rejected or accepted. Electronic titling is not acceptable.

3.1 Required Titling

Each exposure shall be clearly titled in accordance with the following format example sketch and required project data:

For Color Positive Film:

+	MM-DD-YY	12:00	USDA-FSA	+	40	NAIP04	01001-222	+
---	----------	-------	----------	---	----	--------	-----------	---

For Color Infrared Positive Film:

+ 12:00	MM-DD-YY	NAIP04	+	01001-222	40	USDA-FSA	+
---------	----------	--------	---	-----------	----	----------	---

Date: Month-Day-Year in standard numeric notation (MM-DD-YY).

Time: The local standard time of exposure shall be titled only on the first and last used exposure in each strip and at each break in flight line, including breaks due to reflights.

Agency Designator: Government agency acronym as specified.

Scale: Nominal photographic scale represented by two digits to nearest thousand.

Project Code: Project Code NAIP (National Agriculture Imagery Program) followed by the contract fiscal year designator (Example: NAIP02, NAIP03, NAIP04, etc.)

Roll Number: Number in series, preceded by the **last two digits of the Contract Award Number (padded by leading zeros)** which shall be designated upon award. (Example: **Contract Award Number 3-04-1** -- 01001, 01002, 01003; **Contract Award Number 3-04-2** -- 02001, 02002, 02003, and **Contract Award Number 3-04-3** -- 03001, 03002, 03003).

Exposure Number: Number in unbroken series beginning with 1, not 001 or 01.

### 3.2 Type and Size of Characters and Application

The characters used in titling shall be standard block lettering 6.35mm (¼ inch) high. They shall be sharp, legible, and uniformly applied with non-flaking black ink. The titling shall be placed on the non-emulsion side of the film and may be applied by use of an ink drawing pen or stamp. No smears or transfer of marking ink to other parts of the film roll will be permitted. Heat transfer lettering devices may only be used if prior consent is obtained from the Contracting Officer.

### 3.3 Location of Titling Characters

- (a) Color Positive Film: Identifying data shall be placed in line along the most northerly inflight (end lapped) edge of the aerial exposures of north-south flights. Titling shall be positioned so that the characters are 2.5mm (1/10 inch) from the image edge and 2.5mm (1/10 inch) from the corner fiducials.
- (b) Color Infrared Positive Film: Identifying data shall be placed in line along the most northerly inflight (end lapped) edge of the aerial exposures of north-south flights. Titling shall be positioned so that the characters are 2.5mm (1/10 inch) from the image edge and 6.35mm (¼ inch) from the corner fiducials.

### 3.4 Assigning Roll Numbers

All rolls of film submitted shall be numbered consecutively beginning with the first Number of those assigned above. Rolls of film used in the photography of reflights

shall also be numbered consecutively starting with the next highest roll number as assigned to the original rolls.

### 3.5 Rejected or Not Used Exposures

Every exposure within a roll shall be titled regardless if unused or used, rejected or accepted. No exposure shall be removed from the roll unless authorized by the Contracting Officer or representative.

## 4.0 ACQUISITION & FLIGHT PLAN REQUIREMENTS

***Contractor will acquire aerial photography under this contract at 1:40,000 scale, quarter quad centered format.*** Contractor is required to provide the necessary project flight planning, including determination of flight altitudes, for the acquisition of precise vertical aerial imagery in accordance with the technical requirements stated herein

### 4.1 Project Area(s) To Be Photographed

The boundaries and exact coverage of any specified area(s) described in Section B are determined only by the Official Flight Exposure Data. For a general representation of project area(s) coverage and flight plans see Attachment C, State Project Maps.

### 4.2 Flight Exposure Data

The Contractor will be furnished upon award one (1) data text file (.txt) on computer diskette. The data text file will contain the Official Flight Exposure Data indicating the NAPP exposure identification number, location of each exposure by latitude and longitude coordinates, expressed in degrees, minutes, seconds, and approximate flight altitude in feet of each exposure above ground level. The following is a sample of the data:

0912W-0497	39-30-00N	091-13-08W	21000
0912W-0498	39-31-53N	091-13-08W	21000
0912W-0499	39-33-45N	091-13-08W	21000

### 4.3 Coverage Requirements

Stereoscopic coverage of successive and adjacent overlaps of photographs shall be obtained by the Contractor by proper exposure of predetermined exposure stations.

#### (a) Exposure Stations

Predetermined exposure stations are required and locations are designated by the flight exposure data file. Individual frames will be exposed so that the

principal point of the exposure does not exceed the allowable deviation stated in Paragraph 4.5 below.

(b) Reflight Photography

Reflights for aerial photography shall be centered over the predetermined exposure stations with no less than the allowable deviation stated above. All flight segments shall consist of no less than three (3) exposures in length.

4.4 Deviation From Specified Flight Altitudes

Deviation from specified flight altitudes shall not preclude the delivery of digital products from resolution requirements as defined in Section B-1.2.

4.5 Horizontal Deviation

For quarter quadrangle centered photography, deviation from the predetermined exposure station in excess of 152 meters (500 feet) may be cause for rejection.

4.6 Crab

Any series of two or more photographs crabbed in excess of five degrees (5o) as measured between photographs in line and between adjoining lines may cause rejection of any or all of that particular flight line.

4.7 Tilt

Exposure made with the optical axis of the camera in a vertical position is desired. Tilt (departure from the vertical) of any exposure exceeding four degrees (4o) or relative tilt between any two successive exposures exceeding six degrees (6o) may be cause for rejection of any or all of the flight line. Tilt shall not average more than 2 degrees in any 16 km (10 mile) section of a flight line and shall not average more than 1 degree for the entire project.

5.0 REFERENCE SYSTEM FOR AERIAL PHOTOGRAPHY

The location of all project exposure stations can be determined according to a reference system based on 7-1/2 minute quadrangles within one-degree blocks (See Section J, Exhibit 5, Flight Line and Exposure Station Reference System).

5.1 Flight Line Numbers

Flight line numbers consist of three elements: 1) the eastern longitude of the one degree block, 2) the number of the 7-1/2 minute quadrangle within that block,

numbered from east to west, and 3) the east (E) or west (W) flight line within that 7-1/2 minute quadrangle.

## 5.2 Exposure Station Numbers

Exposure station numbers, not actual roll and exposure numbers, are determined by a uniform system of pre-numbered stations running from south to north (See Section J, Exhibit 6, NAPP Exposure Station Reference System).

## 5.3 Reference Example

Thus an example of an exposure located at 41 degrees latitude, 93 degrees 1.875 minutes longitude would be designated as: 0931E-0545.

## 6.0 PHOTO-CENTER DATA FILE DESCRIPTION

Contractor shall prepare a digital photo-center data file for the aerial photography delivered under this contract. The file(s) shall be provided in ASCII comma delimited text format. The latitude / longitude coordinates shall be expressed in Decimal Degrees, formatted to NAD83 datum, and be accurate of the true photo center location. The photo-center data shall include the following attributes:

File Name: project\_item\_photo.txt (ie: naip04\_item1\_photo.txt)

<u>DESCRIPTION</u>	<u>NUMBER OF CHARACTERS IN FIELD</u>
Project Code (NAIP<YY>)	6
Film Roll Number	6*
Exposure Number	3
Date of Exposure (YYYYMMDD)	8
NAPP Flight Line/Photo Station Number (0996W-0572)	10
Camera Lens Serial Number	10
Calibrated Focal Length in millimeters (mm.)	7
Latitude (DD.DDDDD)	8
Longitude (- DDD.DDDDD (Negative))	10
Flight Altitude in meters at camera (MMMMM.MM; MSL)	8
Exposure used for quarter quadrangle tile creation (Y/N)	1**

\* Roll number should be padded with leading zeros.

\*\* The exposure used to create an image (marked "Y" as indicated above) must record the accurate photo date from the film and be reflected within the photo-center data file.

### Example:

NAIP04,01001,222,20040721,0996W-0572,12345678,153.002,42.71936, -123.41498, 07048.63,Y

The exposure used to create an image (marked "Y" as indicated above) must record the accurate photo date from the film and be reflected within the photo-center data file.

## 7.0 FILM SCANNING REQUIREMENTS

### 7.1 Image Scanning

The scans shall be clear and sharp in detail with uniform density, and free from dirt and other defects in the digital imagery in accordance with the following requirements:

- (a) 1-Meter Orthorectified Digital Imagery. All one (1) meter ground sample distance (GSD) GeoTIFF images, from the aerial photography shall be scanned such that the final product results in a 25 micron resolution.
- (b) 2-Meter Orthorectified Digital Imagery. All two (2) meter ground sample distance (GSD) GeoTIFF images, from the aerial photography shall be scanned such that the final product results in a 50 micron resolution.
- (c) The histogram of scanned images must represent all the pixels within the digital image without clipping highlight or shadow detail from the image.
- (d) Color balance is defined as balancing the color between the three primary colors and their complimentary secondary color. Red and cyan must be balanced. Green and magenta must be balanced. Blue and yellow must be balanced.
- (e) Color Saturation is achieved so that minimum colors do not look like a grayscale image and the maximum colors do not bleed into another area of the image.
- (f) The scanned images shall capture red, green, and blue channels for both natural color and color infrared at 8-bit color per channel.

### 7.2 Scan Data File Description

Contractor shall furnish a Scan Data File in ASCII comma delimited text format containing, at a minimum, the following data:

File Name: scan\_data\_item.txt ( ie: scan\_data\_item1.txt )

<u>Description</u>	<u>Number of Characters in Field</u>
Scan File Name:	23
Film Roll:	5*
Exposure Number:	3
Samples = Columns:	4
Lines = Rows:	4


\* Roll number should be padded with leading zeros.

Example:


4812043\_ne\_20040721.tif,01001,203,4759,4821



**FIGURE 2**  
**EXAMPLES OF ACCEPTABLE FORMS OF FIDUCIAL MARKS**

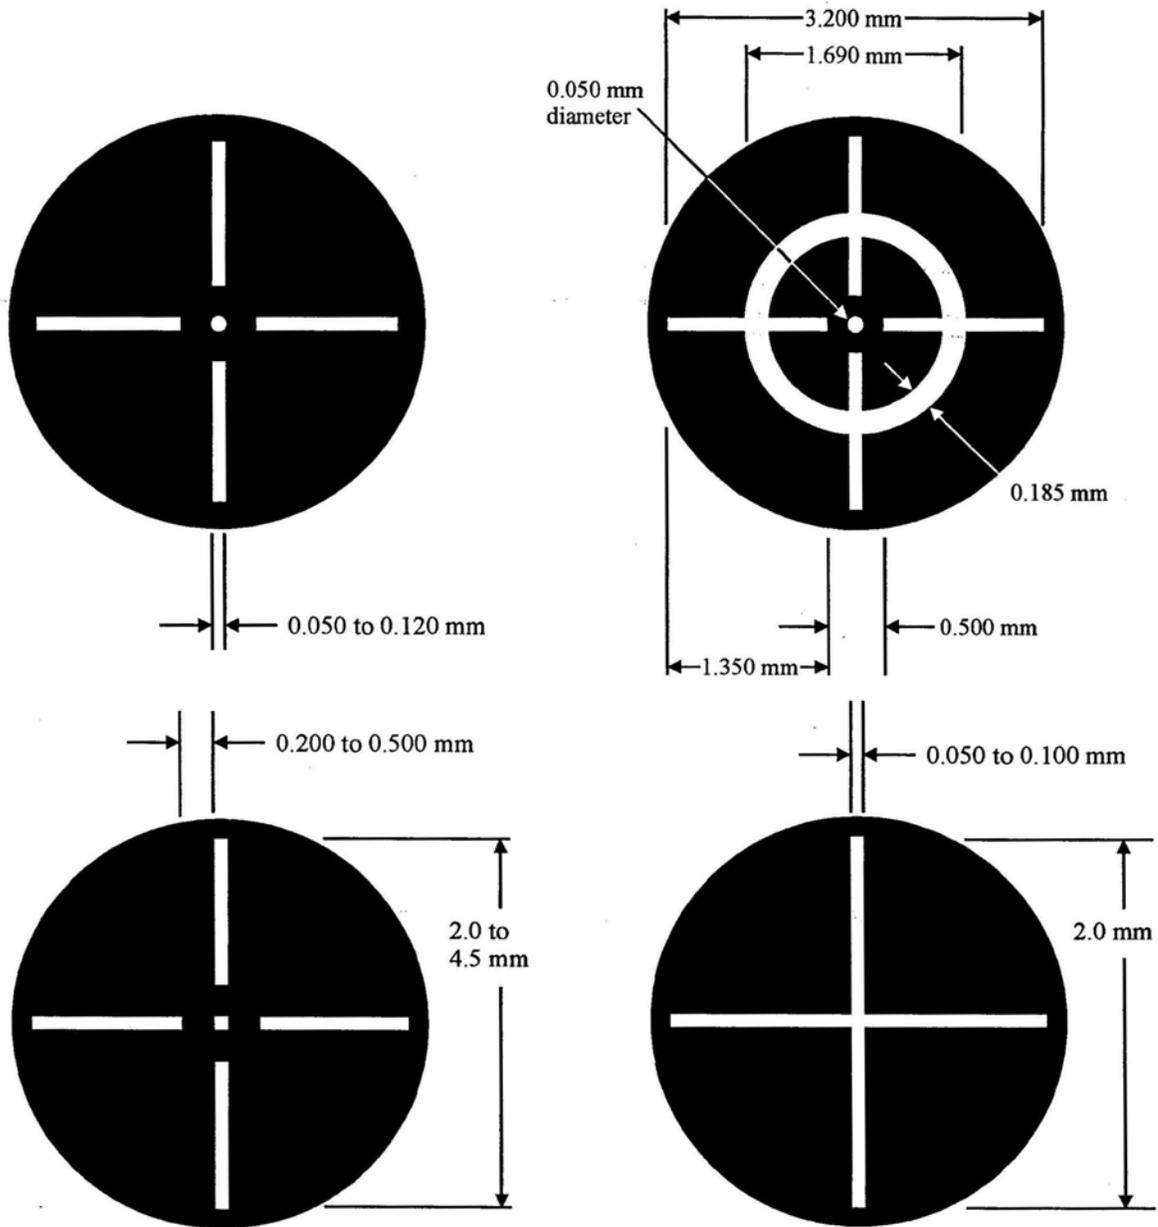

**FIGURE 3**  
**ARRANGEMENT OF FIDUCIAL MARKS**

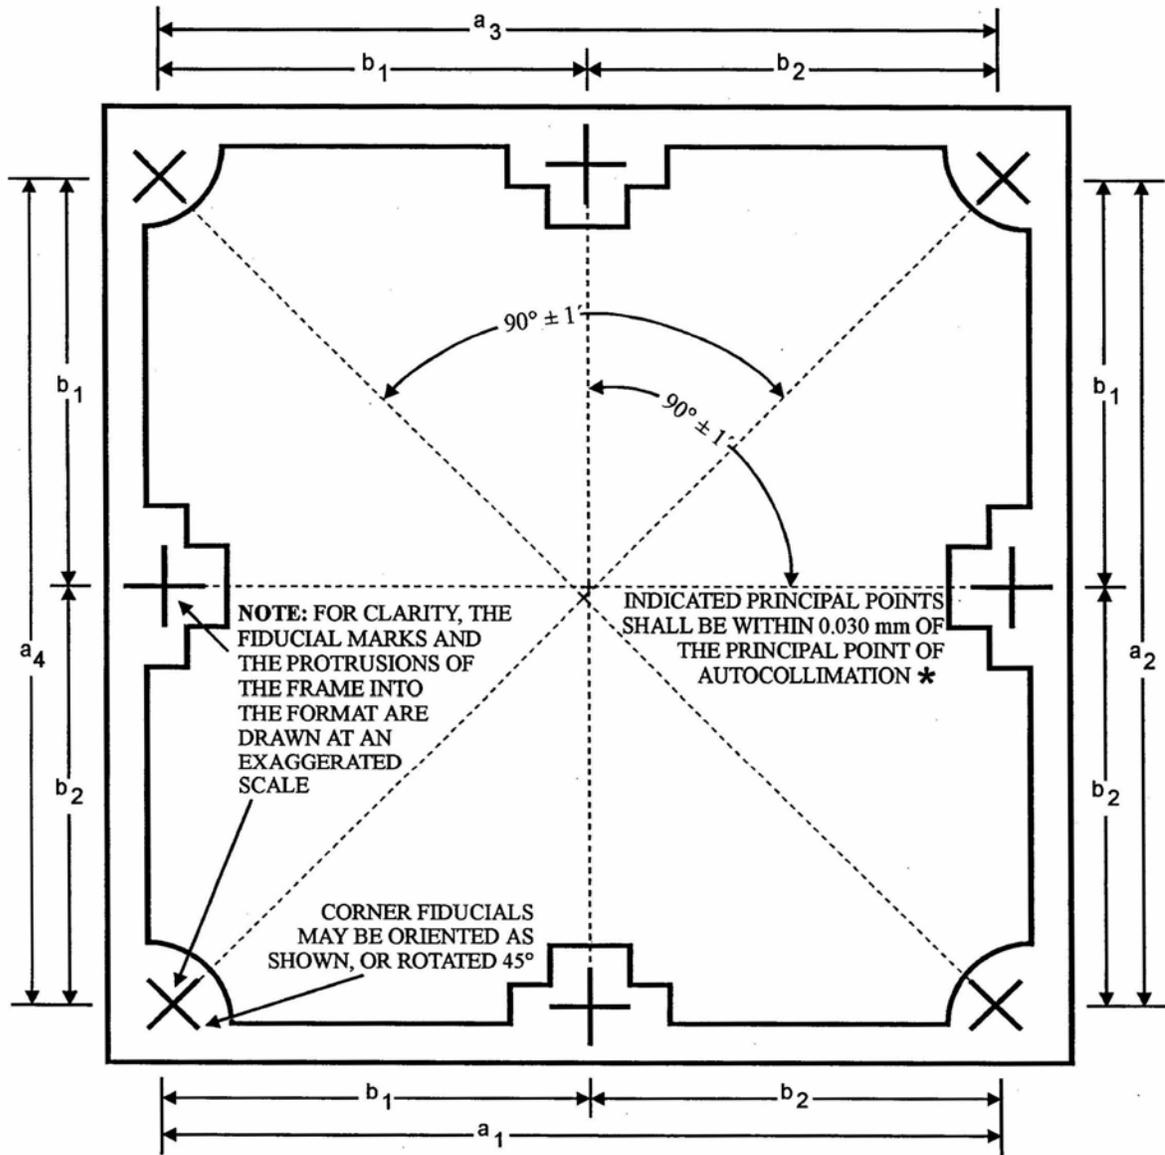

$a_1 = a_2 = a_3 = a_4$  (within 0.500 mm)

$b_1 = b_2$  ( $\pm 0.500$  mm)

\* THE CALIBRATED PRINCIPAL POINT - THE POINT OF SYMMETRY - SHALL BE WITHIN 0.015 mm OF THE PRINCIPAL POINT OF AUTOCOLLIMATION FOR 153 mm FOCAL LENGTH LENSES AND 0.030 mm FOR ALL OTHER FOCAL LENGTH LENSES.

**Table 1**  
**USDA OPTICAL REQUIREMENTS**

**TABULATION OF OPTICAL REQUIREMENTS**

Focal Length	88mm	153mm	210mm	305mm
Focal Length Within	± 4mm	± 3mm	± 4mm	± 5mm
Useable Angular Field	120°	90°	70°	50°
Field Angle-From Axis out to:	54.5°	40°	30°	22.7°
<b>DISTORTION - At Maximum Aperture</b>				
Radial Distortion - Tolerance (um)	± 15	± 10	± 20	± 20
Decentering Distortion - Tolerance (um)	-	< 8	-	-
MODEL FLATNESS - (um) Total Difference	± 17	± 19	-	-

**INDICATED PRINCIPAL POINTS (Fiducial Centers)**

The indicated principal points - fiducial centers - shall fall within a 0.040mm radius circle around the principal point of autocollimation.

**CALIBRATED PRINCIPAL POINT (Point of Symmetry)**

The calibrated principal point - point of symmetry - shall fall within a 0.020mm radius circle around the principal point of autocollimation for 153mm focal length lenses and 0.040mm for all others.

**RESOLUTION**

Measured on Spectroscopic Plate at Maximum Aperture

Minimum Radial & Tangential Resolution in Line Pairs per mm  
**LENS HALF ANGLE**

Lens	0°	7.5°	15°	22.7°	30°	35°	40°	45°	50°	54.5°
86mm Wild Super Aviogon II Zeiss S-Pleogon A or equivalent	59	59	49	42	35	30	17	14	12	12
153mm Wild U. Aviogon Zeiss Pleogon A Jena Lamegon Pl or equivalent	57	57	48	48	40	34	14			
210mm Wild N-Aviogon II Zeiss Topargon or equivalent	49	49	42	35	29					
305mm Wild N. Aviotar Zeiss Topar or equivalent	48	48	28	24						

## ATTACHMENT B

# NATIONAL AGRICULTURE IMAGERY PROGRAM (NAIP) SPECIFICATION FOR DIGITAL SENSOR BASED ACQUISITION

(Dated March 31, 2004)

## 1.0 USDA DIRECT DIGITAL SENSOR SPECIFICATION

This specification covers direct digital sensor acquisition for the USDA National Agriculture Imagery Program (NAIP). Acquisition of the digital imagery may be from airborne or space borne platforms. Tested and calibrated digital sensors for taking vertical aerial imagery are required. Digital camera systems proposed for use must be of comparable precision and quality with traditional stereoscopic mapping cameras. Digital camera systems must also be compatible with analytical mensuration procedures used in photogrammetric surveys and in preparing accurate orthophotography. Only approved digital sensor systems which meet the requirements of these specifications, and as determined by appropriate sensor system documentation and sample imagery submitted, shall be used.

## 2.0 GENERAL REQUIREMENTS

Direct digital sensor systems must be tested, stable, and geometrically calibrated systems with appropriate documentation. Any proposed system must be suitable for use in precision photogrammetric orthoimagery applications. The direct digital sensor system shall provide the following:

### 2.1 Ground Sample Distance

The sensor shall provide the resolution and field of view necessary to meet the ground sample distance (GSD) requirement, as specified in Section B-1.2 of the contract.

- (a) For One (1) Meter Imagery: No color interpretation or pan sharpening will be permitted to achieve the one meter GSD requirements. All red, green and blue (RGB) and near infrared (CIR) color bands must be collected at the required GSD to provide true one meter orthoimagery. The creation of interpreted, interpolated, or sharpened color data is prohibited for the one meter GSD requirements.
- (b) For Two (2) Meter Imagery: Color interpretation or pan sharpening will be permitted to achieve the two meter GSD requirements. The color bands (RGB) and near infrared (CIR) bands may be collected at a GSD no greater than four (4) meters to achieve the pan sharpened two meter orthoimage.

## 2.2 Color Band and Depth.

The digital sensor shall capture red, green and blue channels (RGB) for natural color, and a near infrared channel(s) for color infrared (IR) orthoimagery. The sensor shall capture a minimum of 8-bits per color channel.

## 2.3 System Operation

The digital camera/sensor and its mount shall be checked for proper installation prior to each mission. An automatic exposure control device is permitted, but a manual override capability is required for some types of terrain to achieve proper coverage and exposure. The camera/sensor mount shall be regularly serviced and maintained and shall be insulated against aircraft vibration.

- (a) Camera Port Glass. Aircraft camera/sensor port glass shall be preferably 50mm thick but not less than 32mm thick. The surface finish shall be 80/50 or better. Glass material shall be polished crown, group category M, Mil Specs Mil-W-1366F (ASG), dated October 1975, C-1 optical quality or better.
- (b) Malfunctions. The contracting officer shall be notified of all direct digital sensor system malfunctions within 72 hours. A malfunction is defined as a failure anywhere in the direct digital sensor system that causes an interruption of the normal operations of the system.

## 2.4 Calibration Reports

Calibration reports for each digital sensor proposed for use shall be submitted to the contracting officer with the contractor's proposal and prior to project imagery acquisition if the digital sensor system is removed and remounted. The contractor shall follow manufacturer's specifications for appropriate calibration and recalibration. The calibration reports shall address the geometric performance of the system, and at a minimum, include:

- (a) Date of report
- (b) The name of the person or company performing the calibration
- (c) The methodology and procedures used for calibration
- (d) Final calibration parameters, such as calibrated focal length, lens distortion values, radiometric calibration parameters, and principle point location.

NOTE: The government recognizes that individual calibration reports, procedures, and parameters may be unique to a certain manufacturer since equipment and systems vary from manufacturer to manufacturer.

## 2.5 System Maintenance

The contractor shall perform all maintenance in accordance with the manufacturers recommended and established procedures. The contractor shall maintain a complete history of all maintenance done to the direct digital sensor system and have it available

for Government inspection. The contractor shall provide certification that the system has been maintained, preventive maintenance and calibration performed, to the manufacturers requirements.

### 3.0 FLIGHT PLAN REQUIREMENTS

Contractor is required to provide the necessary project flight line planning, including determination of flight altitudes, for the acquisition of precise vertical aerial imagery in accordance with the technical requirements stated herein

#### 3.1 Project Area(s) To Be Photographed

The boundaries and exact coverage of any specified area(s) described in Section B are determined only by the Official Flight Exposure Data. The boundaries and exact coverage of any state project area are determined only by the Official State Project Area DOQQ List. For a general representation of project area coverage, see Attachment C, State Project Maps.

#### 3.2 Flight Exposure Data

The Contractor will be furnished upon award one (1) data text file (.txt) on computer diskette. The data text file will contain the Official Flight Exposure Data indicating the NAPP exposure identification number, location of each exposure by latitude and longitude coordinates, expressed in degrees, minutes, seconds. The following is a sample of the data:

0912W-0497 39-30-00N 091-13-08W
0912W-0498 39-31-53N 091-13-08W
0912W-0499 39-33-45N 091-13-08W

### 4.0 SENSOR APPROVAL REQUIREMENTS

#### 4.1 Digital Sensor Sample Imagery Requirements

The contractor shall acquire and submit with their proposal, sample images from the digital sensor proposed for use. The sample imagery shall represent the type of terrain (agriculture, cropland, forest, etc.) that is similar to the proposed project area offered. (See Section L-2 of the contract).

The digital sensor sample imagery shall provide the following minimum characteristics:

- (a) Display the same GSD resolution being offered as indicated in Section B.
- (b) For natural color proposals (RGB bands), the sample image shall be 24 bits in

- color depth. It may be collected at up to 12 bits per color band, but be re-sampled to 8 bits per band for delivery.
- (c) For color infrared proposals (G,R,IR bands), the sample image shall be 24 bits in color depth. It may be collected at up to 12 bits per color band, but be re-sampled to 8 bits per band for delivery.
  - (d) Sample image shall be ortho-rectified, with geodetic standards of North American Datum 1983 (NAD83) and UTM projection with the appropriate Zone indicated.
  - (e) Sample shall be produced as a DOQQ formatted, GeoTIFF image using the standard indicated in Section C-6.2 of the contract.
  - (f) The sample imagery shall fit on one standard CD, formatted as mentioned in Section D-1.2 of the contract.

#### 4.2 Digital Sensor Documentation Requirements

The contractor shall provide with their proposal detailed documentation of the digital sensor proposed for use. Documentation may include brochures, technical specifications, marketing material, or other descriptive literature. The documentation shall contain at a minimum the following information:

- (a) General overview information
- (b) Product configuration description
- (c) Sensor component description
- (d) Technical Specifications
- (e) Computer management and storage systems
- (f) Image acquisition and processing workflow.